

# POWERED BY NATURE














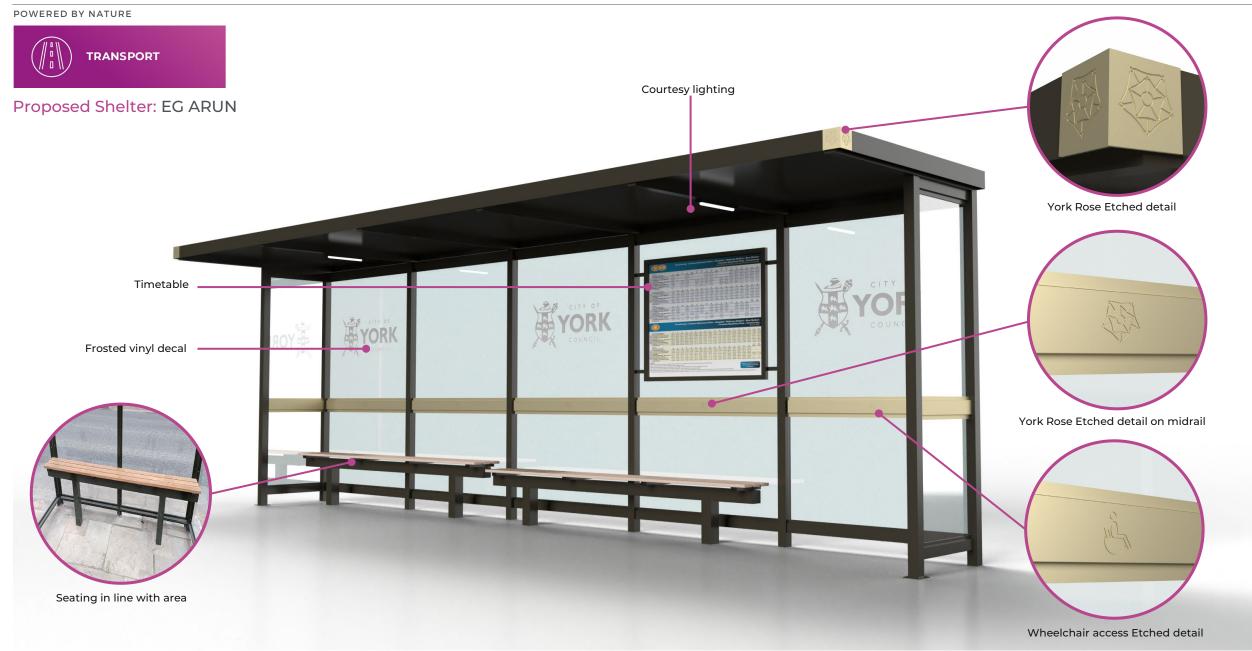




### POWERED BY NATURE





# Proposed Shelter: EG ARUN – Footings

### 5 BAY SHELTER FOOTING - WITHOUT FLOOR MOUNTED SEATING

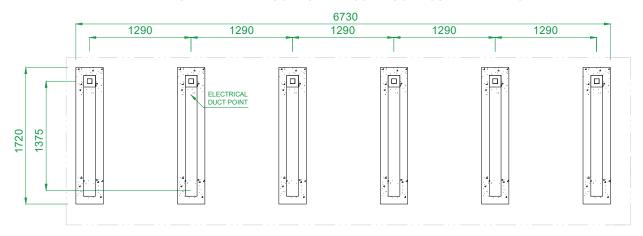


# 5 BAY SHELTER FOOTING - WITH FLOOR MOUNTED SEATING

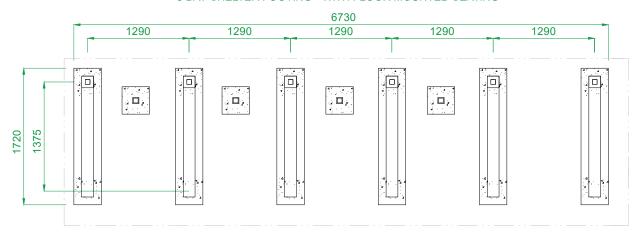



SECTION SHOWING FOUNDATION DETAIL



SECTION SHOWING ELECTRICAL FOUNDATION DETAIL (OPTIONAL)

# ELECTRICAL NOTE

THIS IS ONLY REQUIRED IF THE SHELTER IS TO HAVE POWER CONNECTED TO IT FOR LIGHTS/RTI/FEEDER PILLAR. POSITIONS OF CONDUIT NOT SHOWN AS THIS WILL BE DEPENDENT ON THE SHELTER CONFIGURATION -SEE SALES ORDER FOR DETAILS.

NOTE 1 TOP OF EACH FOUNDATION TO BE SET 100mm BELOW FGL AT EVERY POINT.

FOUNDATION PLAN IS FOR OPEN SHELTERS.

NOTE 3 MINIMUM 1200mm PAVEMENT CLEARANCE IS ALWAYS REQUIRED. CHECK WITH END PANEL SIZES.

POWERED BY NATURE

Proposed Shelter: Visual representation only - not official location







WINNER: Net Zero. Innovation Project of the Year 2022



WINNER: Sustainable Transport Project of the Year 2023



Leading by