

Product Data Sheet


Gyproc® SoundBloc 15mm



Gyproc SoundBloc 15mm is a plasterboard with a high density noise insulating core.

Where to use
Use it to achieve greater sound insulation levels through walls, ceilings and floors.

Certifications
Environmental Product Declaration (EPD) available [Click here](#).

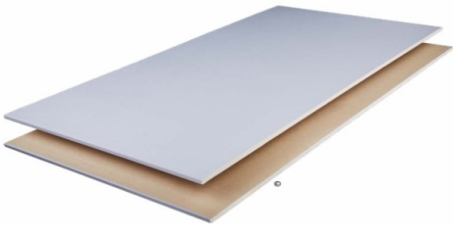

Product information

Composition
The plasterboard is made of a gypsum core between paper liners.

Colour
Face colour: Blue.
Reverse colour: Brown.

DIMENSIONS AND WEIGHTS				
PRODUCT SIZES (mm)	1200 X 2400	1200 X 2700	1200 X 2800	1200 X 3000
Nominal thickness (mm)	15	15	15	15
Minimum weight (kg/m²)	13	13	13	13
Edge options	Tapered edge	Tapered edge	Tapered edge	Tapered edge
Number of tapered edges	2	2	2	2
Maximum width tolerance (mm)	+0	+0	+0	+0
Minimum width tolerance (mm)	-4	-4	-4	-4
Maximum length tolerance (mm)	+0	+0	+0	+0
Minimum length tolerance (mm)	-5	-5	-5	-5
Maximum taper width (mm)	80	80	80	80
Minimum taper width (mm)	40	40	40	40
Maximum taper depth (mm)	2.5	2.5	2.5	2.5
Minimum taper depth (mm)	0.6	0.6	0.6	0.6
Squareness: 1200mm width boards (maximum difference in diagonal measurements), 5mm				

NB: Dimensional tolerances. Quality controls are set to meet customer requirements between these maximum and minimum tolerances.

© British Gypsum, 2023.

Product Data Sheet

Gyproc® SoundBloc 15mm



Performance
Here we only provide performance information related to the product. Please see the White Book for system-dependent performance.

Standards
EN 520:2004+A1:2009, Type D.
Declarations of Performance (DoP) available [Click here](#).