

FOOTWAYS PROGRAMME OF WORKS 2021/22



FOOTWAY

RESURFACING AND RECONSTRUCTION

Highway Maintenance Services
Hazel Court
James Street
YORK
YO10 3DS

March 2021

Methodology for the Selection of Schemes

The selection of schemes is based on a full detailed video survey of the entire network. The surfaces are graded into blocks of condition graded from 1 (as new) to 5 (structurally impaired). These blocks are analysed and where feasible grouped together into likely schemes. The schemes are then scored and ranked considering but not limiting to the following criteria :-

- Surface condition
- Within 500m of a Hospital
- Within 100m of a GP
- Within 100m of a School
- Workplace population density
- Residential population density
- Bus Frequency
- Locality to City Centre/ Historic Core

The loading effect of each of the above is determined by CYC and in line with best practice; feedback and ranking is sought from Highways Safety Inspectors with consideration and influence given to places with large amounts of insurance claims and their experience.

Further surveys relating to the skid resistance (SCRIM) are also undertaken and the results of which feed into the Surface Dressing Programme. These surveys are undertaken on the entire Classified Network (A,B,C roads), with particular emphasis on areas like junctions, intersections, and crossings and analysis based on national guidance.

FOOTWAY RESURFACING RECONSTRUCTION AND SLURRY SEALING

LOCATION	WARD	TYPE	ITEM
Southdown road	Huntington and New Earswick	Footway resurfacing	1
Forestgate	Haxby and Wiggnton	Footway resurfacing	2
Footpath at rear of Jasmine Close- root control	Huntington and New Earswick	Footway resurfacing	3
Auster Road	Rawcliffe and Clifton Without	Footway resurfacing	4
Burton Stone Lane	Clifton	Footway resurfacing	5
St Nicholas Crescent	Copmanthorpe	Footway resurfacing	6
Beckfield Lane from Boro-bge Rd to Norman Dve	Acomb	Footway resurfacing	7
Hamilton Drive School- Holly bank end both sides	Holgate	Footway resurfacing	8
Greengales Lane- recreation hall to courtneys?	Wheldrake	Footway resurfacing	9
High Oaks	Hewort Without	Footway resurfacing	10
Hyrst Grove	Heworth	Footway resurfacing	11
Melbourne Street	Fishergate	Footway resurfacing	12
Lendal Judges Lodgings Side	Guildhall	Footway resurfacing	13
Coppergate from 3 Tuns to Low Ousegate	Guildhall	Footway resurfacing	14
Blake Street from Stonegate to 17	Guildhall	Footway resurfacing	15
Blake Street from 17 to No1	Guildhall	Footway resurfacing	16
Marygate	Guildhall	Footway resurfacing	17
AREA 1	TBA	Footway Slurry seal	18
AREA 2- St Giles way/ Barons Cres	Copmanthorpe	Footway Slurry seal	19
AREA 3	TBA	Footway Slurry seal	20
AREA 4	TBA	Footway Slurry seal	21

GENERAL REQUIREMENTS


The Consultant/Contractor should be aware of the following requirements in relation to the works programmes:

1. All surface covers to be flush with surrounding surfaces upon completion including gully covers and frames.
2. Standing water / ponding shall be eliminated on all schemes, particularly at pedestrian crossing points.
3. Pedestrian tactile crossings shall be provided as necessary on all footway schemes, excluding those where only a slurry sealing treatment is required.
4. All highway drainage shall be checked and cleaned prior to commencement of all schemes.
5. Damaged or broken kerbs to be replaced as necessary on all schemes.
6. The Council's requirements in relation to notification of the works to local residents.
7. The need to coordinate with other contractors, developers and Council departments.
8. Carry out the required notification procedures under the New Roads and Streetworks Act.
9. Comply with the specific requirements in relation to specification and timing of works.
10. Make arrangements for vehicular crossings to be constructed as part of any footway reconstruction scheme.
11. Ensure any overhanging vegetation onto a footway is cut back prior to works commencing.
12. Profile patching to be carried out where necessary on footway slurry sealing to eliminate ponding.
13. The need to ensure the specification requirements in relation to siding out and weed killing are adhered to.

LTP FOOTWAYS


ITEM	1		
LOCATION	Southdown rd FW		
ROAD NO			
WARD/PARISH	Huntington & N Earswick		
SCHEME DRAWING NO			
DESCRIPTION OF WORK	South side of Footway priority		
<i>SPECIFICATION RECOMMENDATION</i>	T21/T15 depending on conditions		
CW WIDTH		FW WIDTH	
CW LENGTH		FW LENGTH	
CW AREA		FW AREA	765
FEE			
TOTAL ESTIMATE	£57375		


NOTES	Overhead lines
-------	---------------------------

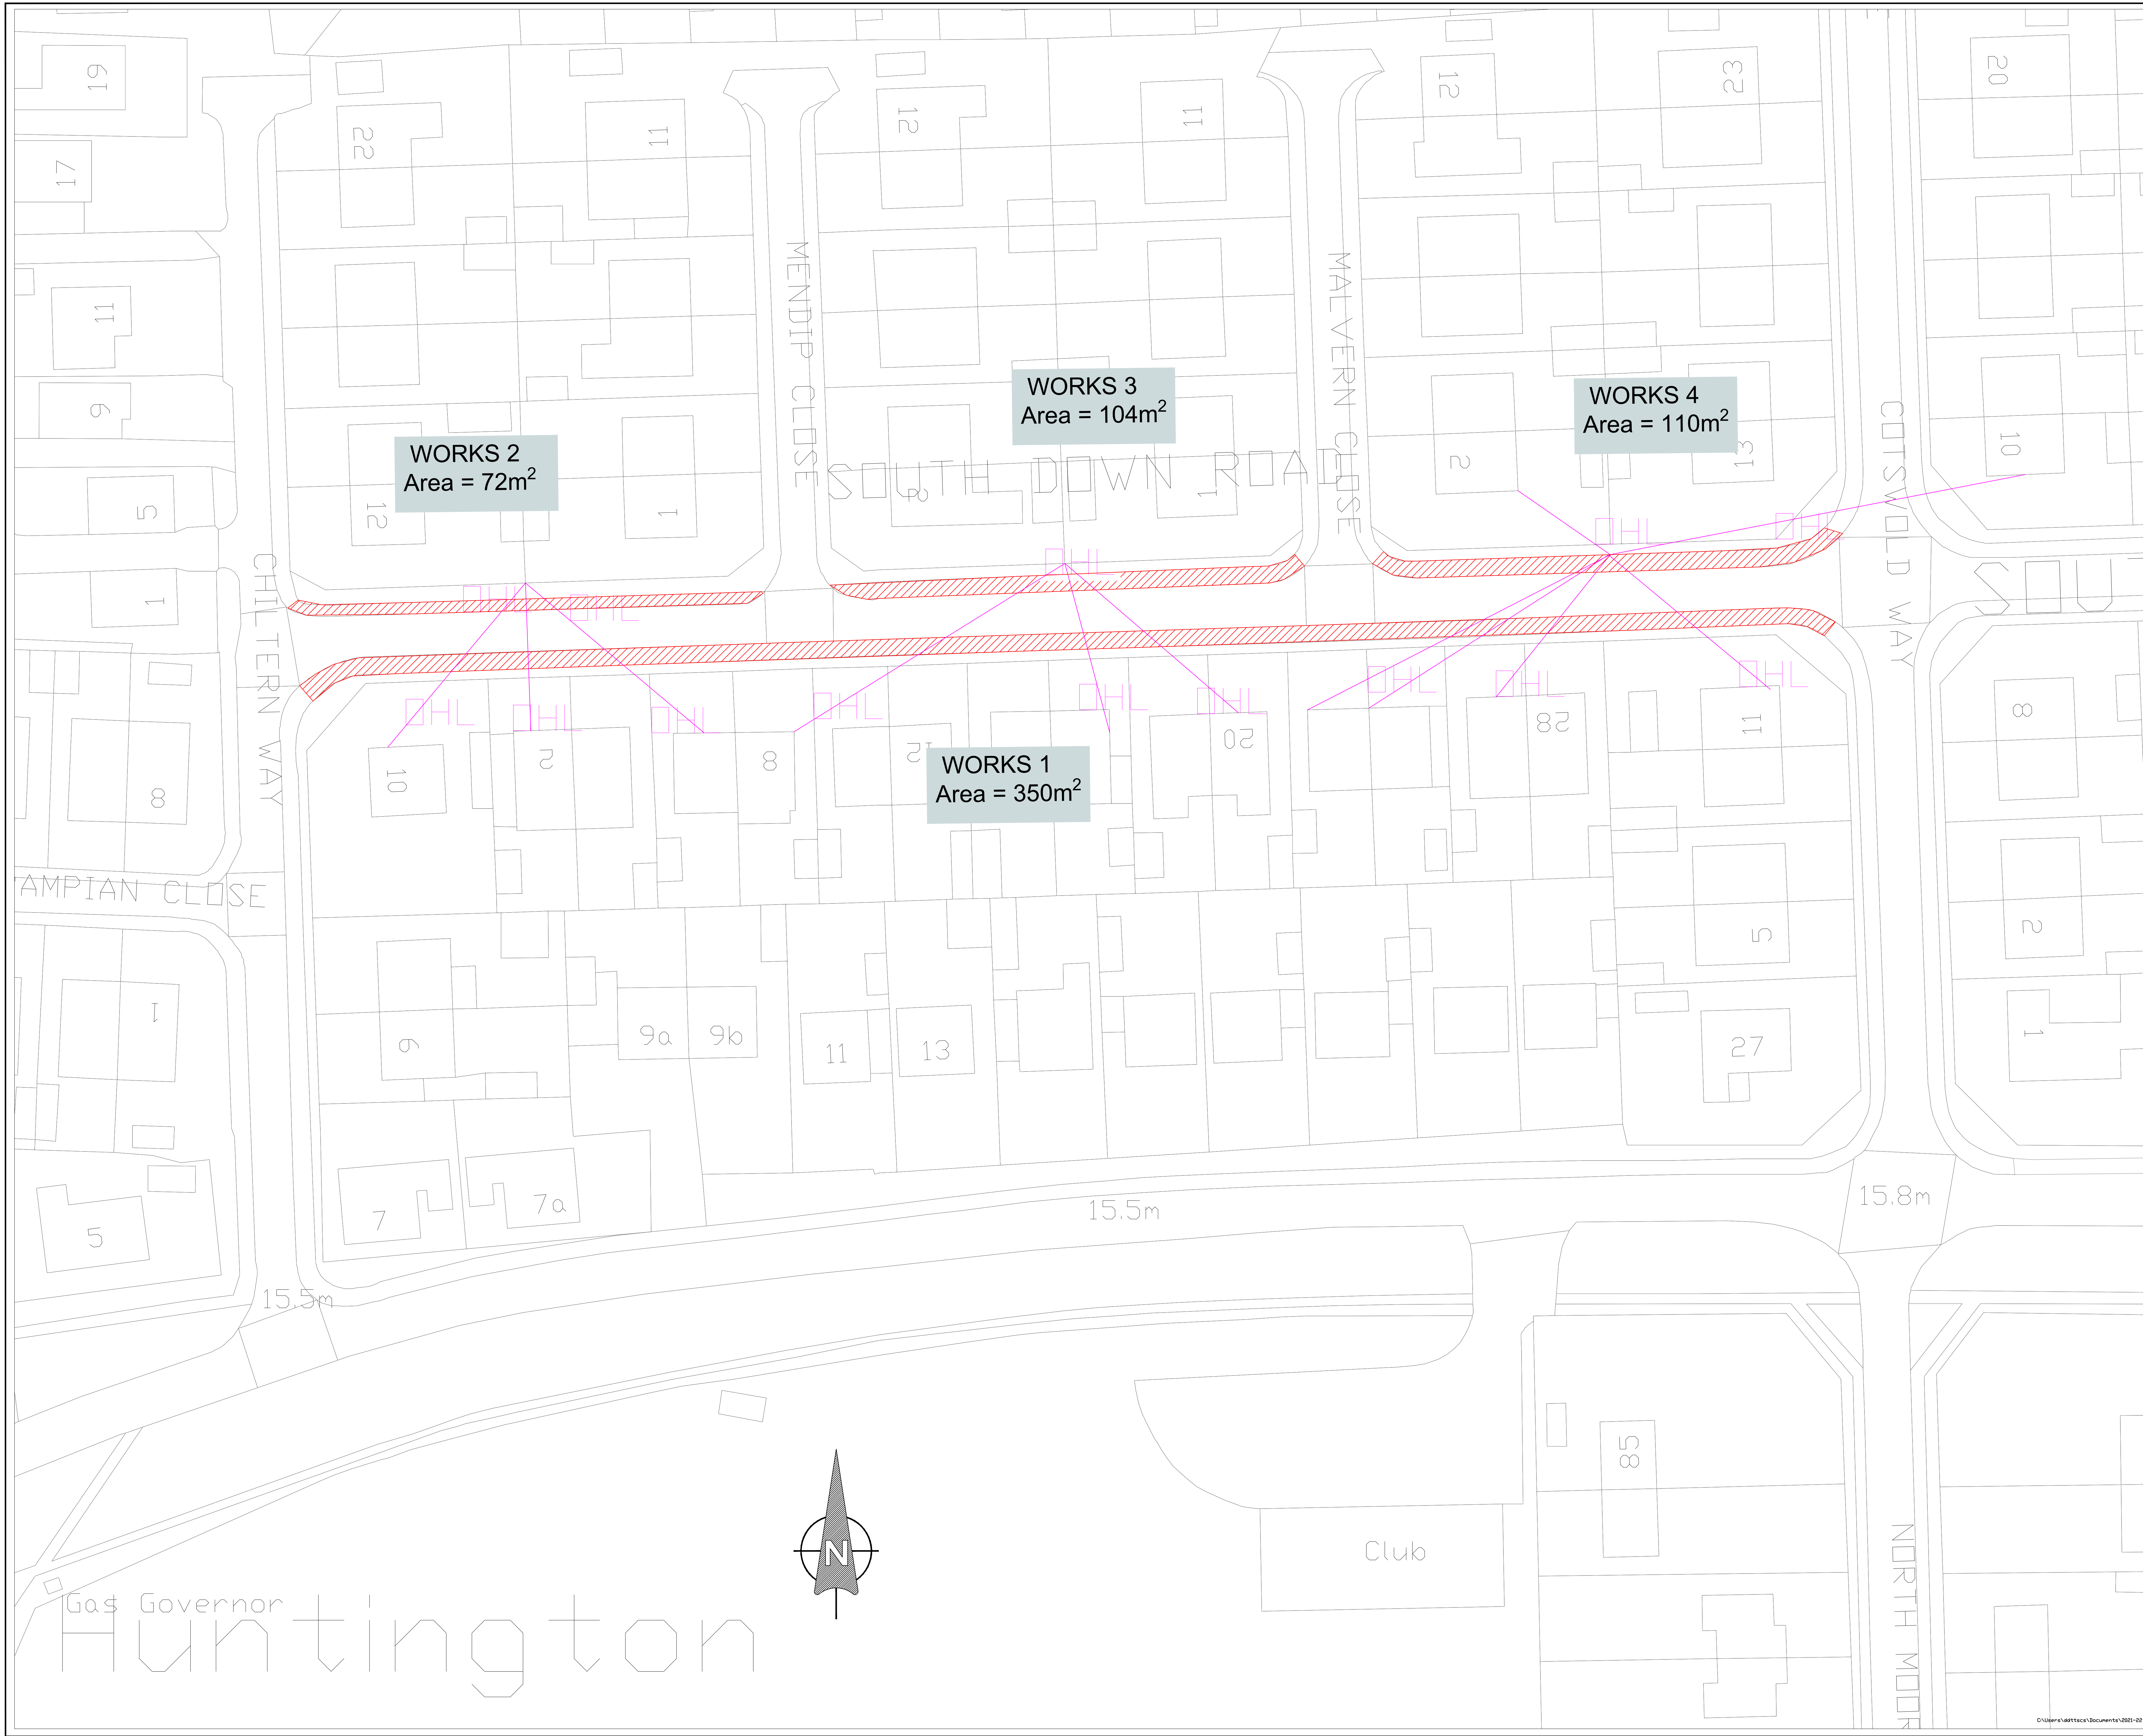

NOTES:

1. All dimensions in metres unless otherwise stated.
2. Do not scale from this drawing.
3. Any issues should be raised with the scheme engineer immediately.

 **LOCATION OF WORKS**
AREA= 765m²
T15 FW reconstruction, some kerbs to replace

 **overhead lines**

SAFETY INFORMATION:
Overhead cables are shown on this drawing for guidance only. The contractor shall make themselves aware of the exact position of all overhead cables within the lengths of the scheme during daylight hours prior to works starting. Underground services are not shown but should be anticipated.

BASED UPON THE ORDNANCE SURVEY MAPING WITH THE PERMISSION OF THE CONTROLLER OF HER MAJESTY'S STATIONERY OFFICE. © CROWN COPYRIGHT. UNAUTHORISED REPRODUCTION INFRINGES CROWN COPYRIGHT AND MAY LEAD TO PROSECUTION OR CIVIL PROCEEDINGS. City of York Council OS Licence No. 1000 20818

DRAWING TYPE

Revision	By	Checked	Approved	Date	Description



Highways – Transport Projects and Delivery Team
Eco Depot, Hazel Court, James Street, York, YO10 3DS
www.york.gov.uk

Project
2021-22 Highways Programme
Footways
WORKS

Drawing
Proposed Programmes
Southdown Rd FW
Huntington & New Earswick

Drawn by	CSS	Date:	03/09/2020
Checked by		Date:	
Authorised by		Date:	

Drawing No.	Revision
	A


Drawing Scale:	NTS	A0
CAD Filename:	Plot Scale:20000	



C:\Users\adeltica\Documents\2021-22 highways programme\2021-22 highways programme\Southdown Rd FW\Southdown Rd FW Works & Local

LTP FOOTWAYS

ITEM	2		
LOCATION	Forestgate Haxby FW		
ROAD NO			
WARD/PARISH	Haxby & Wigginton		
SCHEME DRAWING NO			
DESCRIPTION OF WORK	Footway resurfacing – mainly near to Oak tree lane		
<i>SPECIFICATION RECOMMENDATION</i>	T21/T15 depending on conditions see drawing sections 1-5		
CW WIDTH		FW WIDTH	
CW LENGTH		FW LENGTH	
CW AREA		FW AREA	525
FEE			
TOTAL ESTIMATE	£47000		

NOTES	residential
-------	------------------------

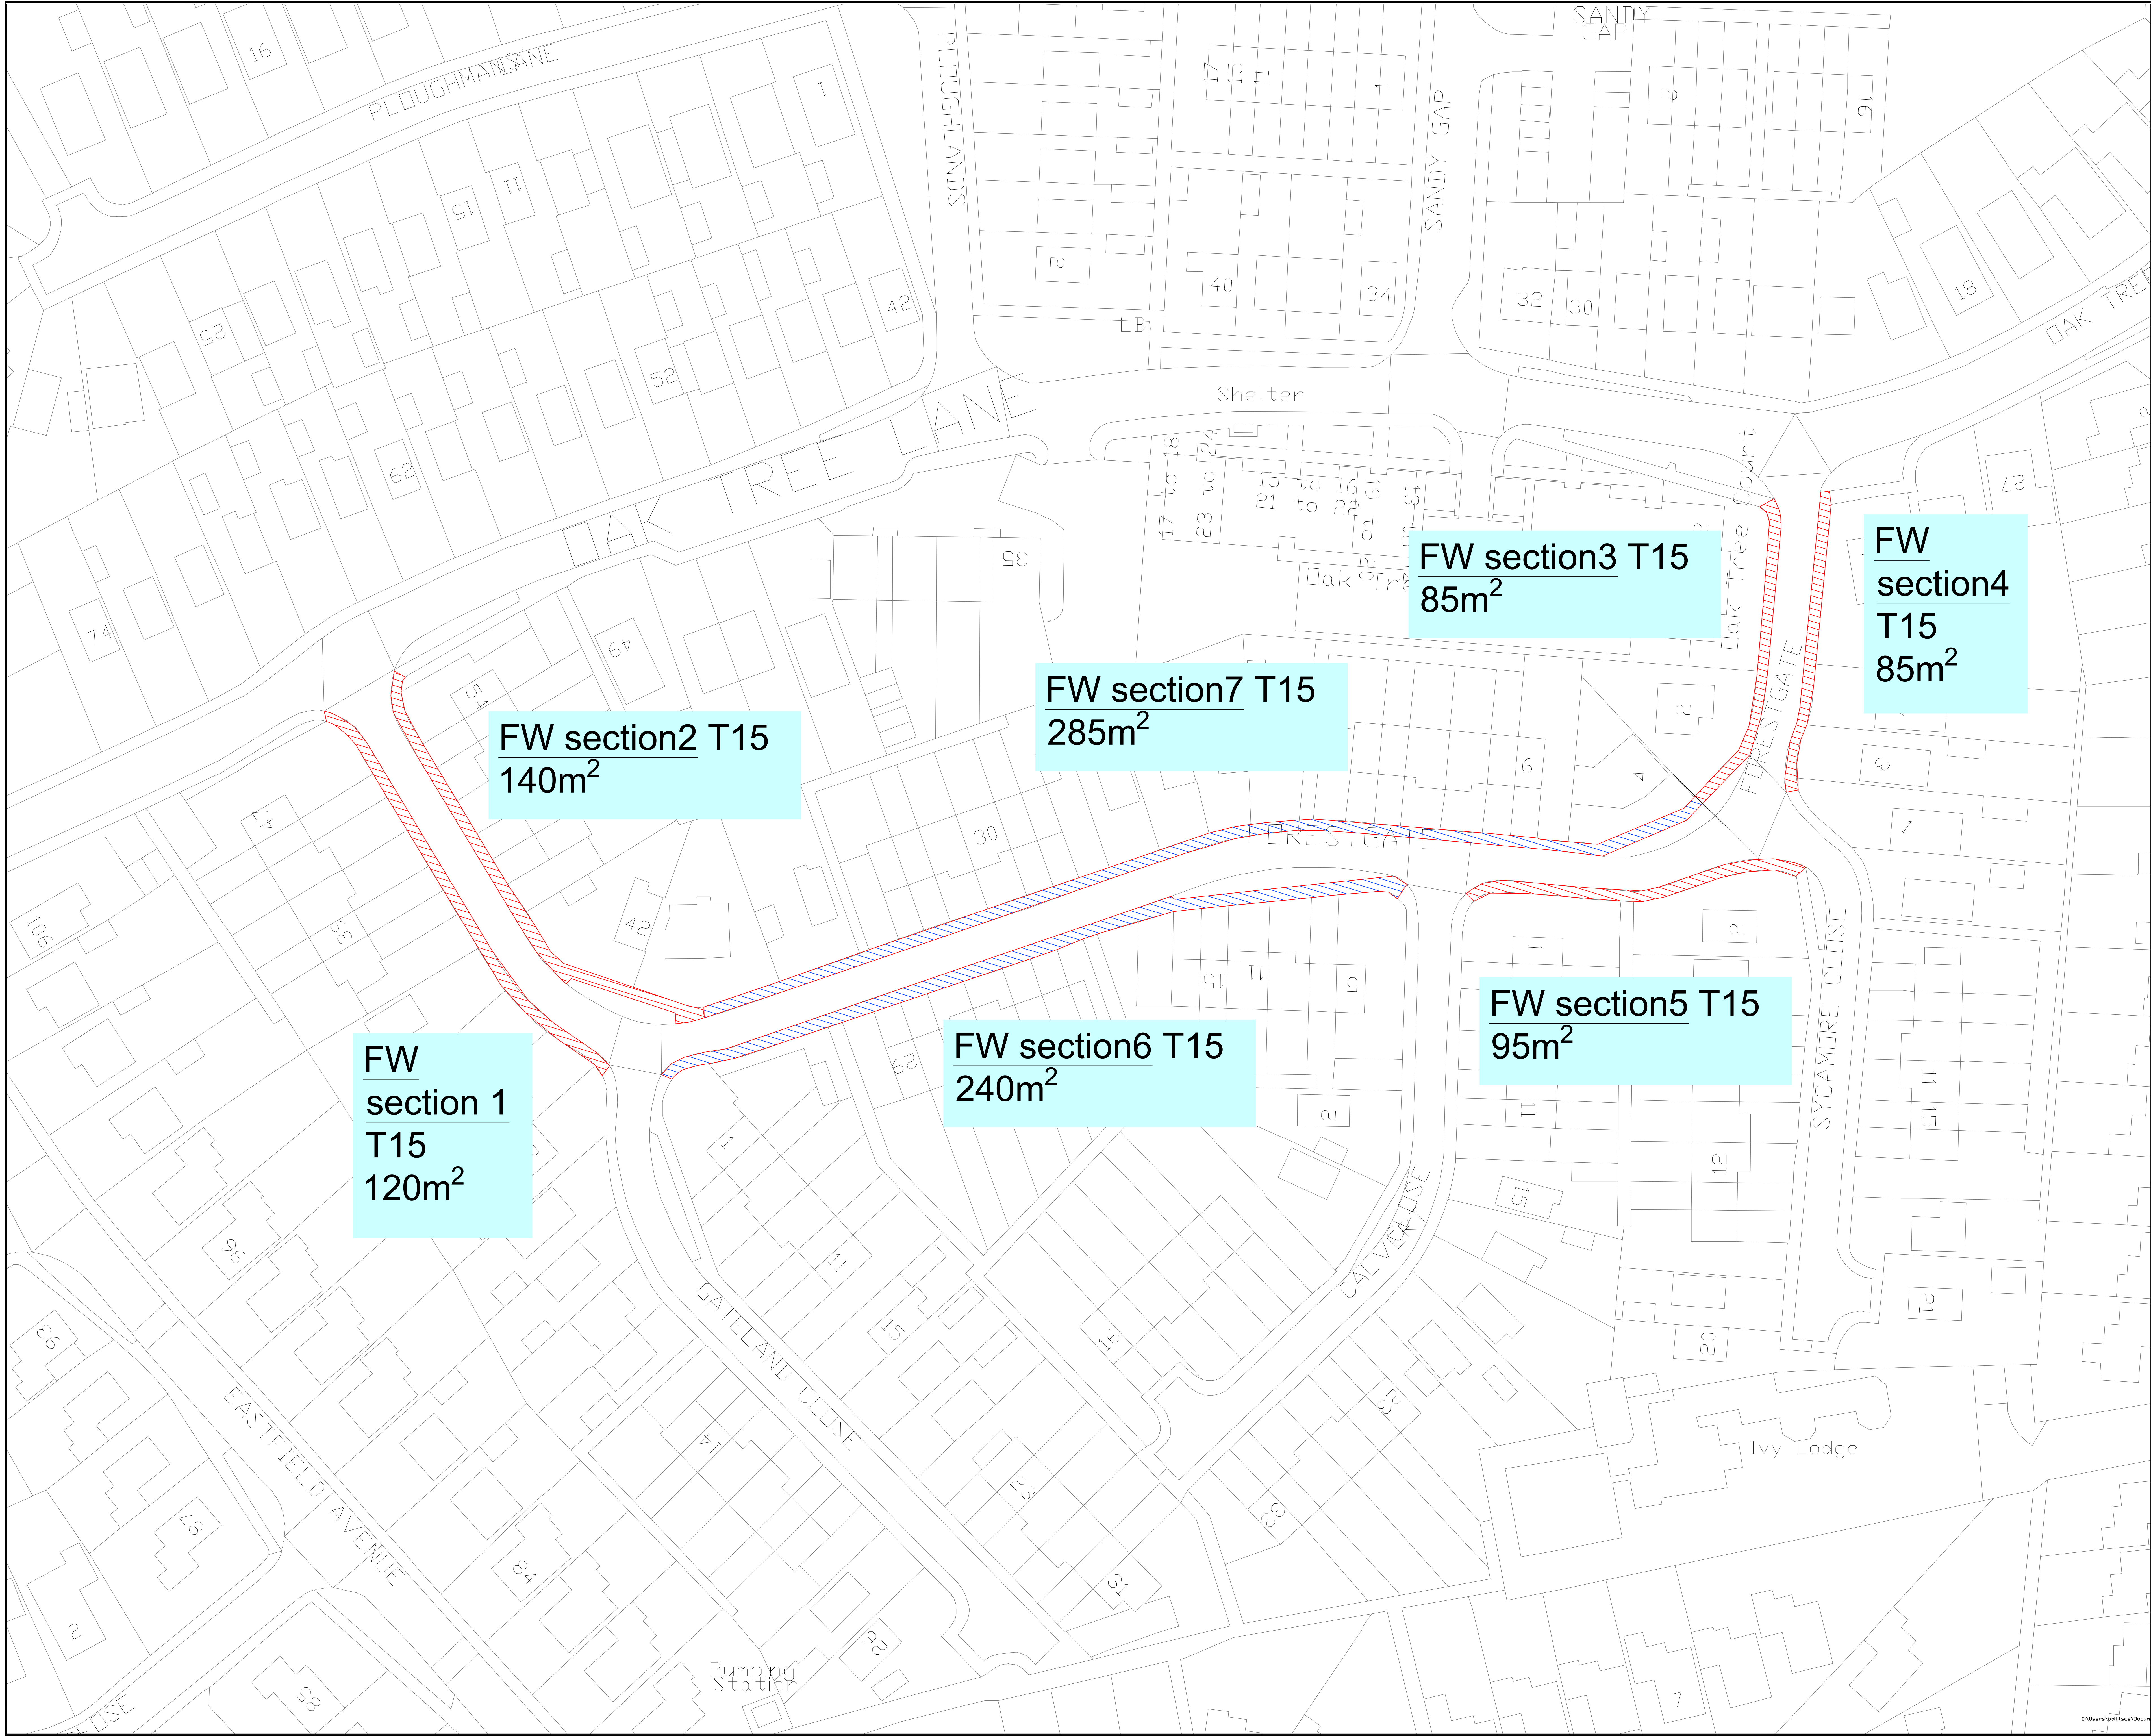


- NOTES:
- 1. All dimensions in metres unless otherwise stated.
 - 2. Do not scale from this drawing.
 - 3. Any issues should be raised with the scheme engineer immediately.
- KEY:
-  Location of 2021 works sect1-5
Total= 525m²
T15, + 4 tactiles to replace
 -  Location of 2022 works -525m²

HSE
Residential area

BASED UPON THE ORDNANCE SURVEY MAPPING WITH THE PERMISSION OF THE CONTROLLER OF HER MAJESTY'S STATIONERY OFFICE. NO PART OF THIS DOCUMENT IS TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT PERMISSION IN WRITING FROM THE CITY OF YORK COUNCIL. OS Licence No. 1000 20818

DRAWING TYPE

Revision	By	Checked/Approved	Date	Description

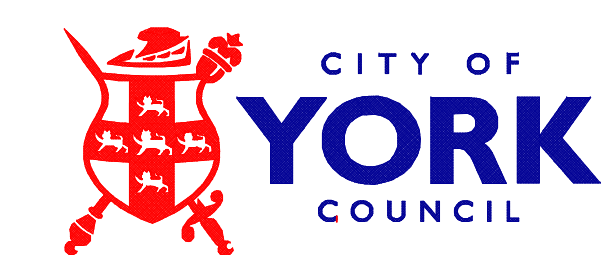

Highways – Transport Projects and Delivery Team
Eco Depot, Hazel Court, James Street, York, YO10 3DS
www.york.gov.uk

Project
2021-22 Highways Programme
FOOTWAYS
WORKS

Drawing
Proposed Programmes
Forest Gate
Haxby & Wigginton

Drawn by CSS Date: 03/10/2020
Checked by Date:
Authorised by Date:

Drawing No. Revision
A


Drawing Scale: NTS A0

CAD Filename: Plot Scale:NTS

LTP FOOTWAYS

ITEM	3		
LOCATION	Jasmine Close (footpath at rear of houses) FW		
ROAD NO			
WARD/PARISH	Huntington & New Earswick		
SCHEME DRAWING NO			
DESCRIPTION OF WORK	Footway reconstruction- geotextile underlay, plus drainage works. Works 1 to be priority		
SPECIFICATION RECOMMENDATION	T21 reconstruction depending on conditions see drawing
Use geo textile under surfacing to deal with subsidence and tree roots and assist drainage. Build up edge next to woods to reduce slope		
CW WIDTH		FW WIDTH	
CW LENGTH		FW LENGTH	
CW AREA		FW AREA	350
FEE			
TOTAL ESTIMATE	£32590		

NOTES	Mainly elderly residential
Access path for properties and woods
Restricted access for machinery- Bollarded footway
May need removing and replacing after?
Overhanging trees
-------	--

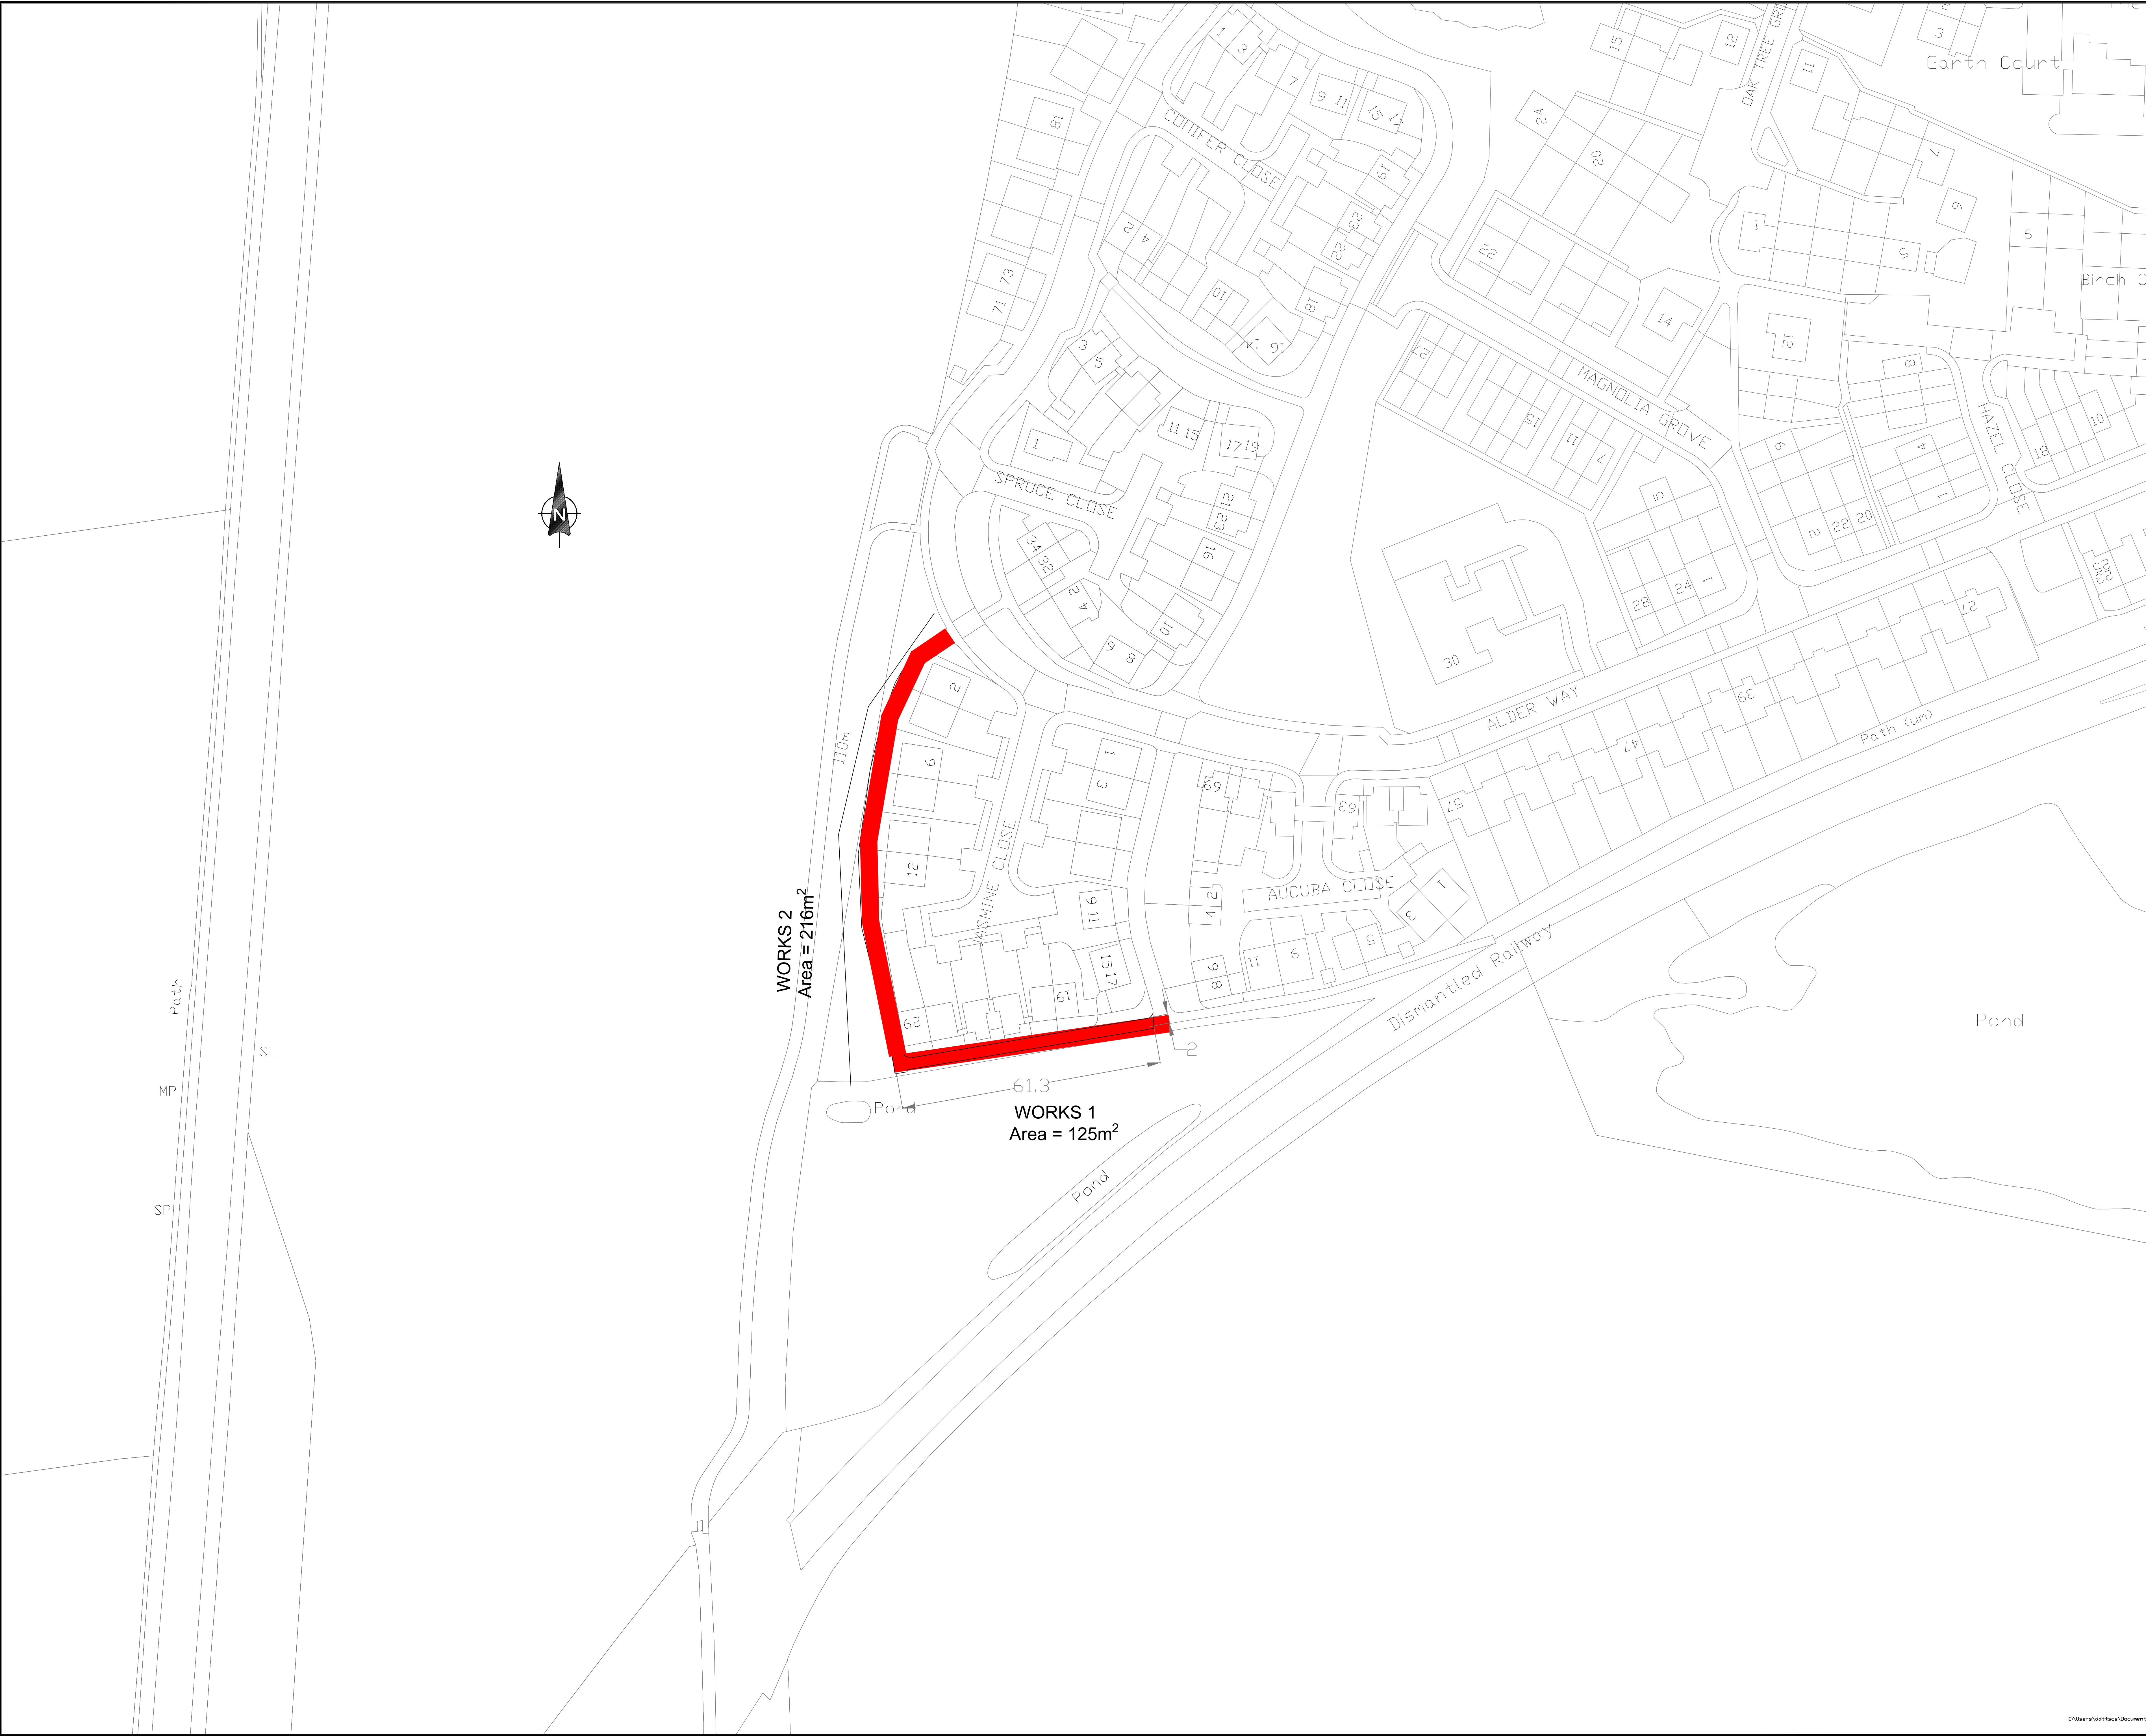

NOTES:

1. All dimensions in metres unless otherwise stated.
2. Do not scale from this drawing.
3. Any issues should be raised with the scheme engineer immediately.

KEY:

LOCATION OF WORKS 1
Area = 125m²


LOCATION OF WORKS 2
Area = 216m²

HSE
Next to woods- overhanging trees
Access tight- bollards may be removable, but still footway access only
Access path for residents
Cycle route

BASED UPON THE ORDNANCE SURVEY MAPPING WITH THE PERMISSION OF THE CONTROLLER OF HER MAJESTY'S STATIONERY OFFICE. © CROWN COPYRIGHT. UNAUTHORISED REPRODUCTION INFRINGES CROWN COPYRIGHT AND MAY LEAD TO PROSECUTION OR CIVIL PROCEEDINGS.
City of York Council OS Licence No. 1000 20818

DRAWING TYPE

Revision	By	Checked	Approved	Date	Description



CITY OF
YORK
COUNCIL

Highways – Transport Projects and Delivery Team
Eco Depot, Hazel Court, James Street, York, YO10 3DS
www.york.gov.uk

Project
2021-22 Highways Programme
Footways
LOCATION

Drawing
Proposed Programmes
Jasmine Close footpath
Huntington & New Earswick

Drawn by CSS Date: 03/10/2020
Checked by Date:
Authorised by Date:

Drawing No. Revision
A


Drawing Scale: NTS A0

CAD Filename: Plot Scale:20000

LTP FOOTWAYS

ITEM	4		
LOCATION	Auster rd FW		
ROAD NO			
WARD/PARISH	Rawcliffe & Clifton without		
SCHEME DRAWING NO			
DESCRIPTION OF WORK	Footway reconstruction with either geotex underlay or concrete in foundations both sides. Or(if agreed) replace north FW with parking bays. Double yellow lines and bollards to be discussed if both sides FW reinstated		
SPECIFICATION RECOMMENDATION	T21 reconstruction , consult on parking bays, bollards, double yellow lines		
CW WIDTH		FW WIDTH	
CW LENGTH		FW LENGTH	
CW AREA		FW AREA	220
FEE			
TOTAL ESTIMATE	£23000		


NOTES	Constant overrunning by heavy vehicles, particularly concrete trucks. Reinstatement unlikely to last long without reinforcement (either geotex underlay or concrete). Needs consultation on installation of bollards and or double yellow lines or replacing footway with parking bays. Consider removing the FW next to concrete works and replace with parking bays. FW is safety issue as peds have to cross the concrete plant exit. Installing parking bay would stop lorries needing to mount pavement on other side and reduce on street/ verge parking- NB extra costs if this is done
-------	--

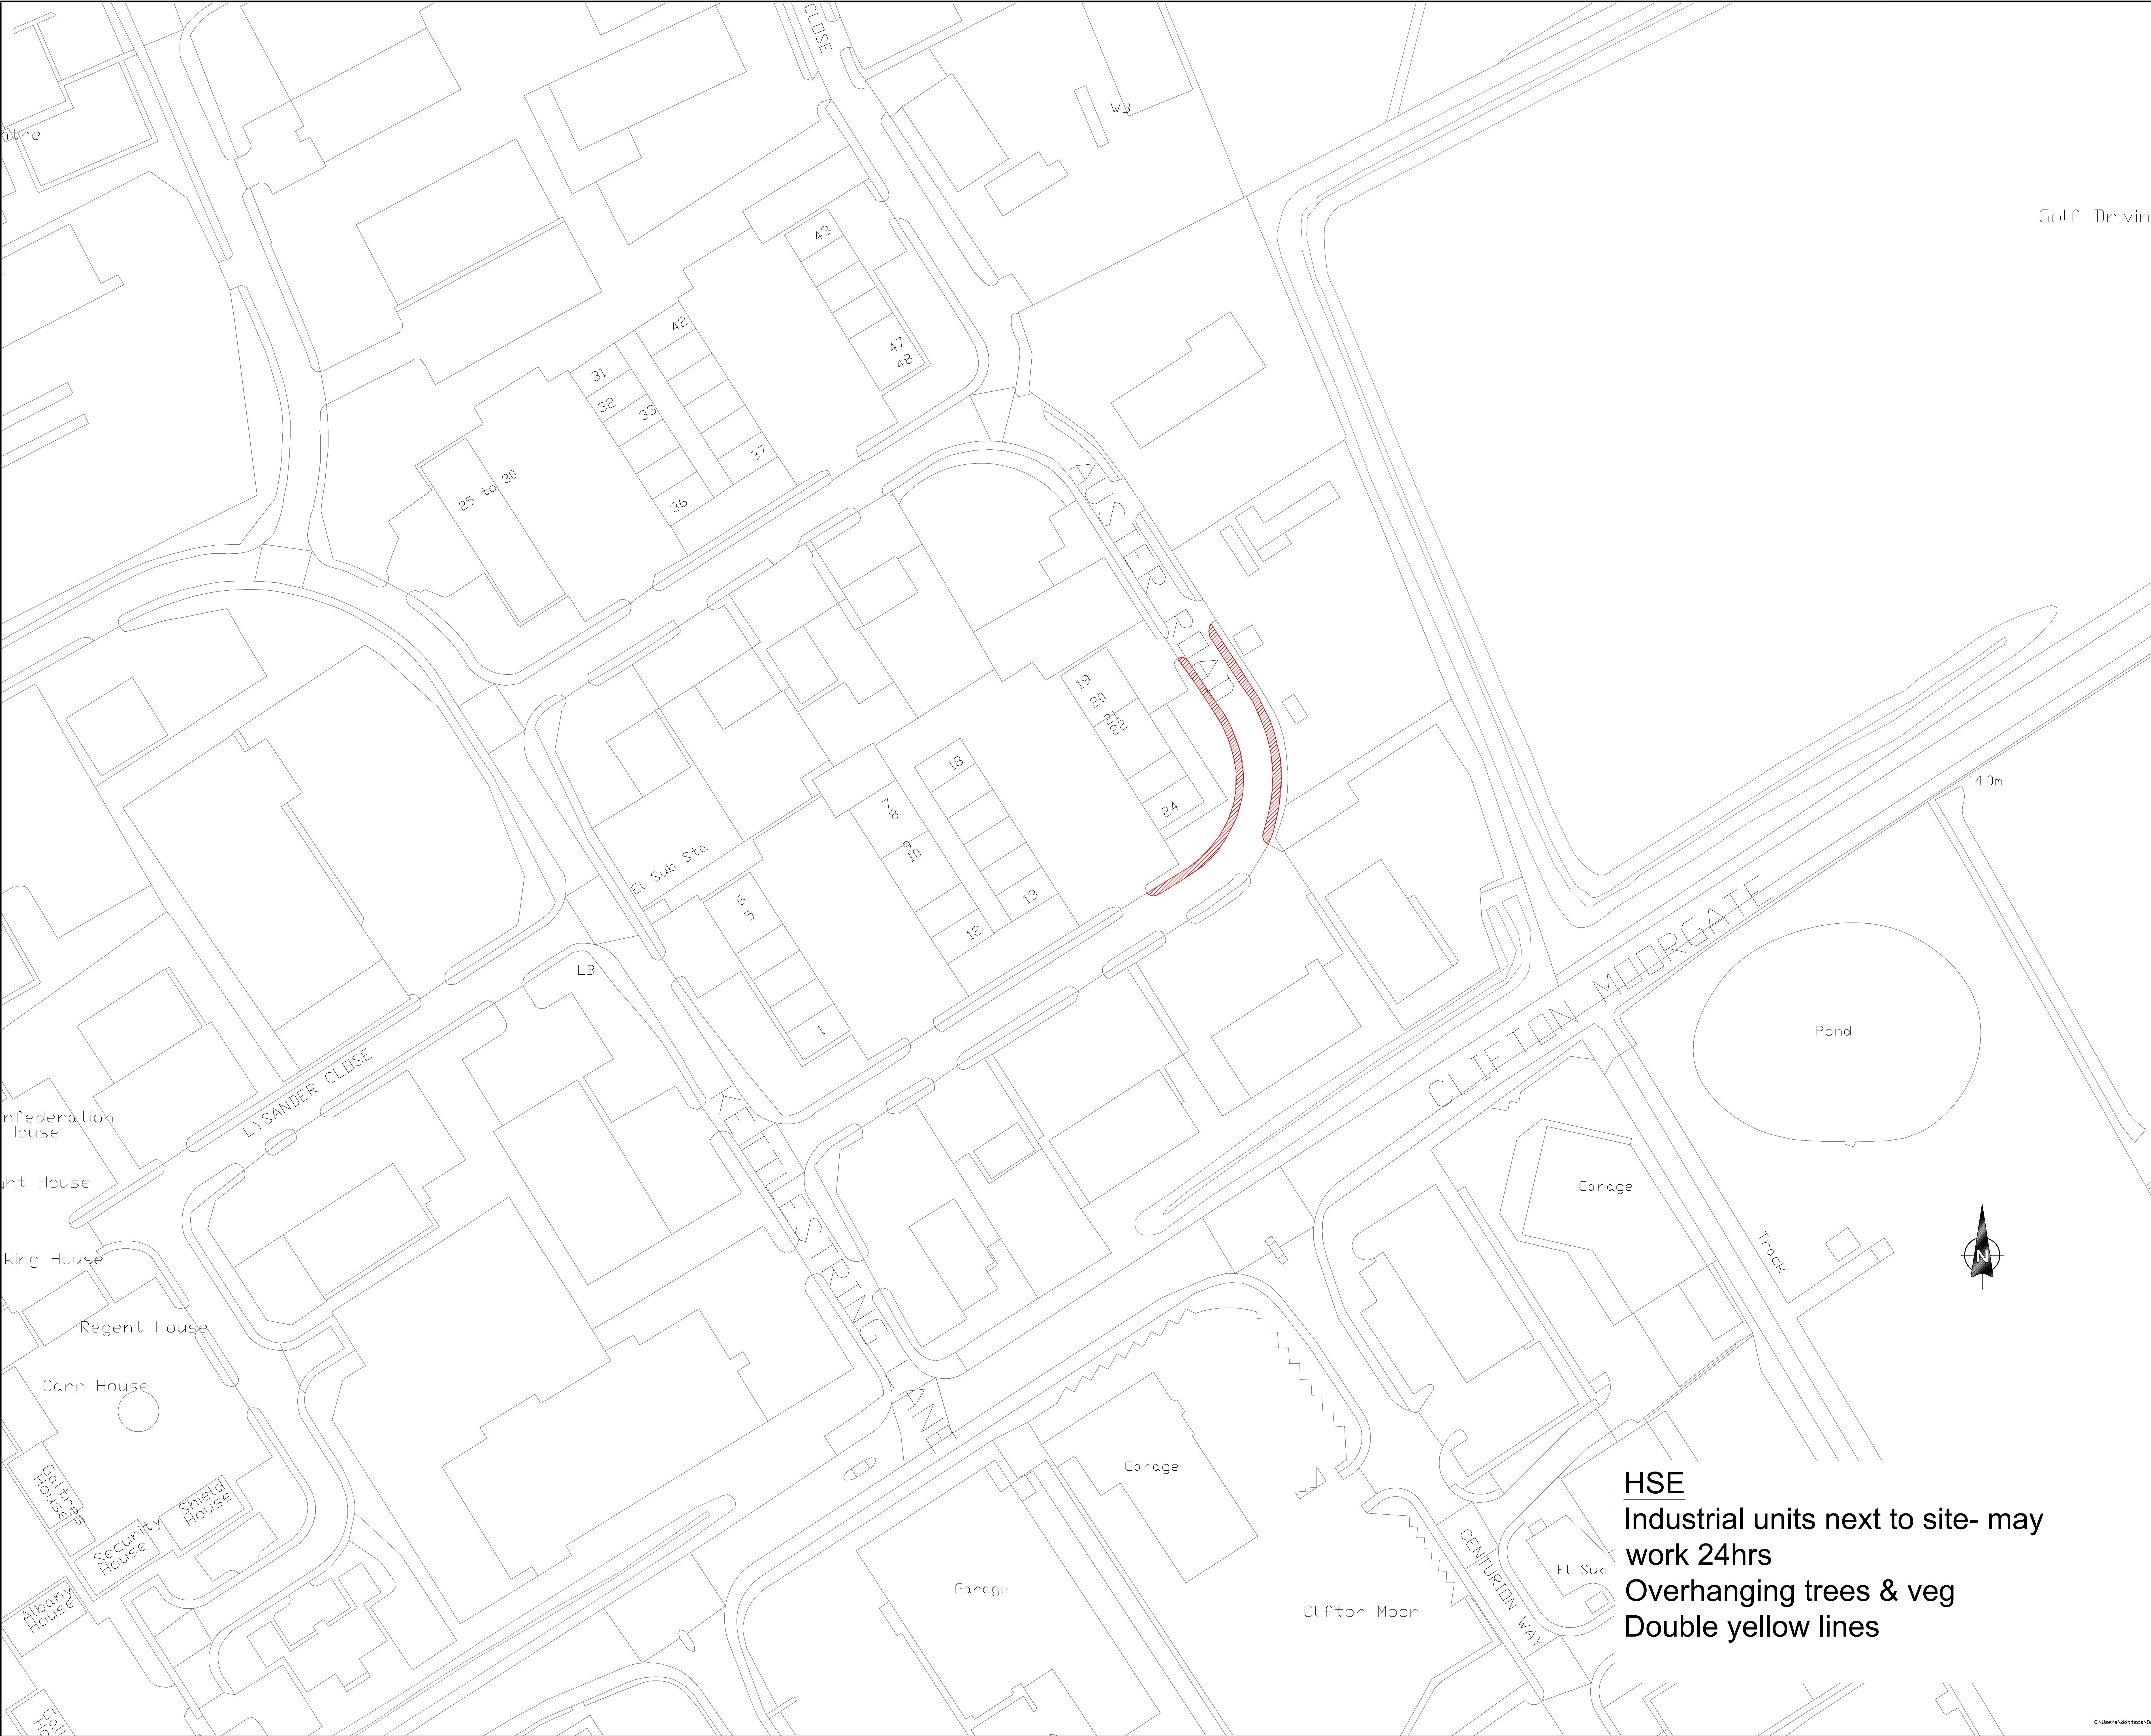

HSE
Industrial units next to site- may
work 24hrs
Overhanging trees & veg
Double yellow lines

NOTES:

1. All dimensions in metres unless otherwise stated.
2. Do not scale from this drawing.
3. Any issues should be raised with the scheme engineer immediately.



LOCATION OF WORKS
Area=220m²

BASED UPON THE ORDNANCE SURVEY MAPING WITH THE PERMISSION OF THE CONTROLLER OF HER MAJESTY'S STATIONERY OFFICE. © CROWN COPYRIGHT. UNAUTHORISED REPRODUCTION INFRINGES CROWN COPYRIGHT AND MAY LEAD TO PROSECUTION OR CIVIL PROCEEDINGS.
City of York Council OS Licence No. 1000 20818

DRAWING TYPE

Revision	By	Checked	Approved	Date	Description



Highways – Transport Projects and Delivery Team
Eco Depot, Hazel Court, James Street, York, YO10 3DS
www.york.gov.uk

Project
2021-22 Highways Programme
Footways- LOCATION
Auster Rd- part

Drawing
Proposed Programmes
Rawcliffe & Clifton Without
Iveco-conc wks both sides

Drawn by	CSS	Date:	03/04/2019
Checked by		Date:	
Authorised by		Date:	

Drawing No.	Revision
	A

Drawing Scale:	NTS	A0
----------------	-----	----

CAD Filename:	Plot Scale:20000
---------------	------------------

LTP PRINCIPAL FOOTWAYS

ITEM

5

LOCATION

Burton Stone Lane

ROAD NO

WARD/PARISH

Clifton

SCHEME DRAWING NO

DESCRIPTION
OF WORK

Resurfacing of footway.
Prioritise Burton Stone Pub end of FW

*SPECIFICATION
RECOMMENDATION*

Type 21 full reconstruction

CW WIDTH

FW WIDTH

CW LENGTH

FW LENGTH

CW AREA

FW AREA

670


FEE

TOTAL ESTIMATE

£63,537.50

NOTES

Residential area.
Conservation Area
OH comms lines

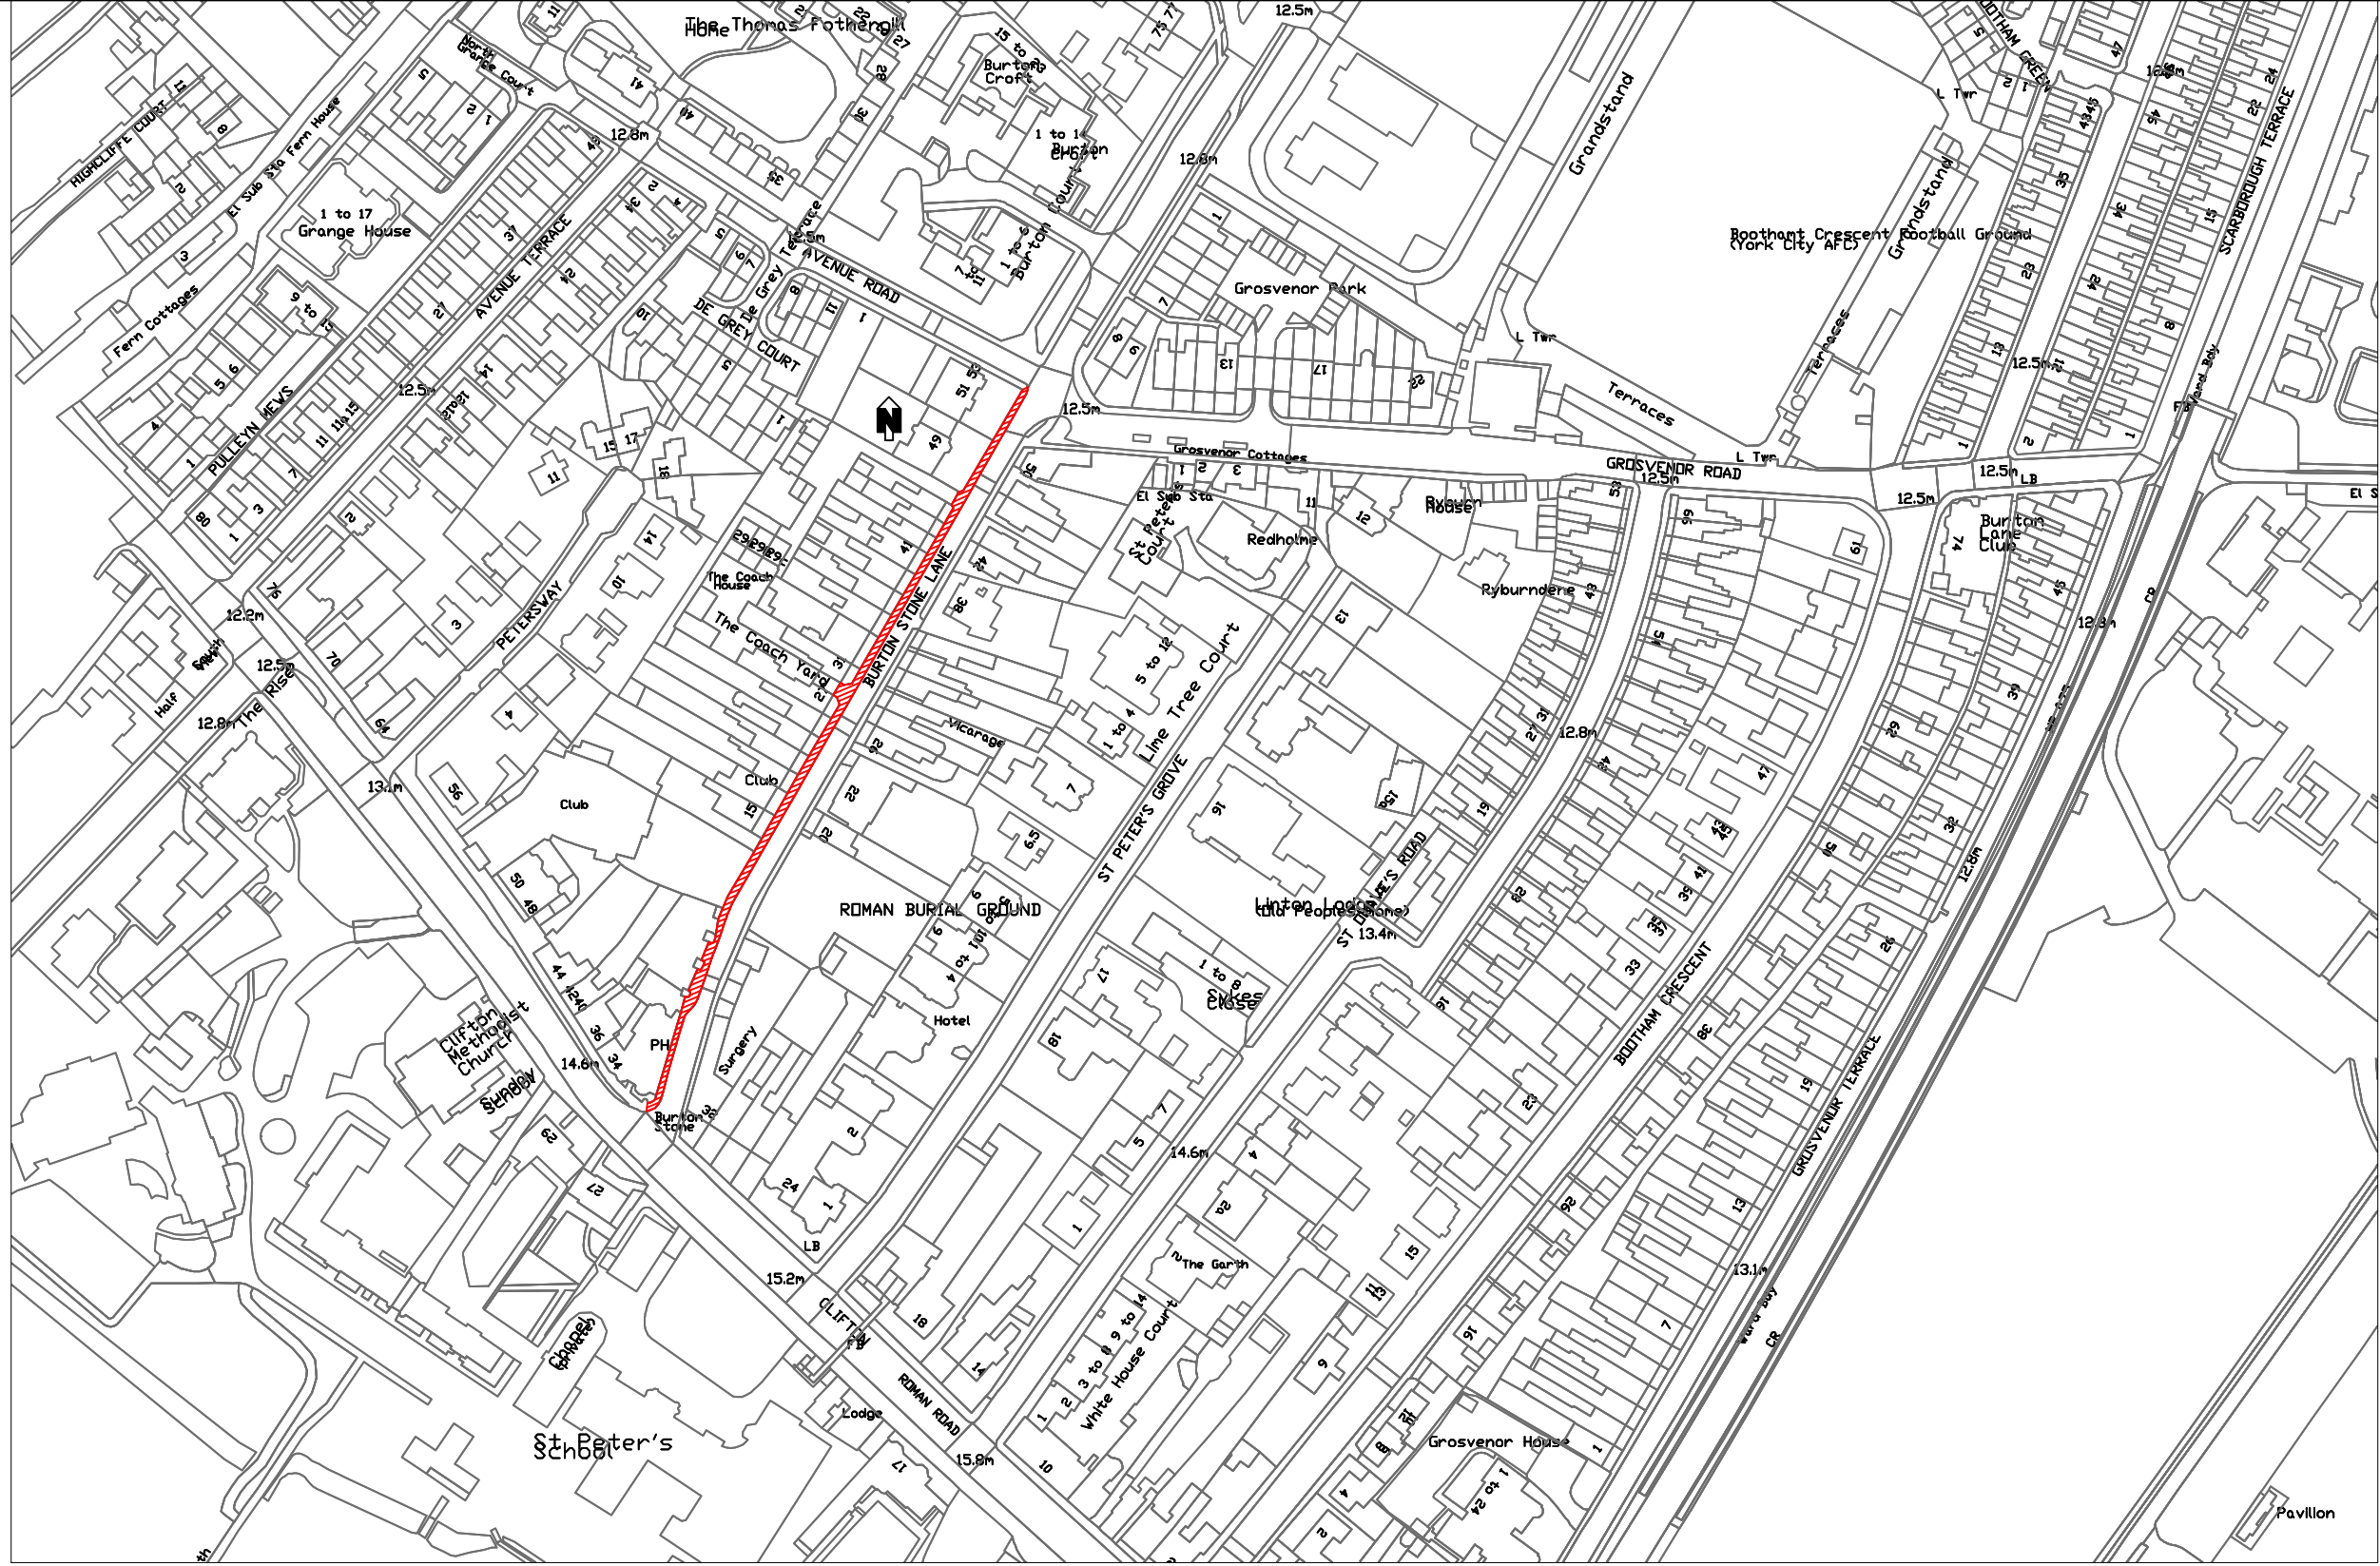

BURTON STONE LANE

Notes

- 1. Do not scale from this drawing
- 2. This drawing is issued for information only


Design Notes

Resurfacing of footway.
Type 21- Full Reconstruction
Prioritise Burton Stone Pub end of FW


HSE Notes

Conservation Area
Trees
Significant pedestrian traffic

AREA 670m² EST TOTAL £63,537.50

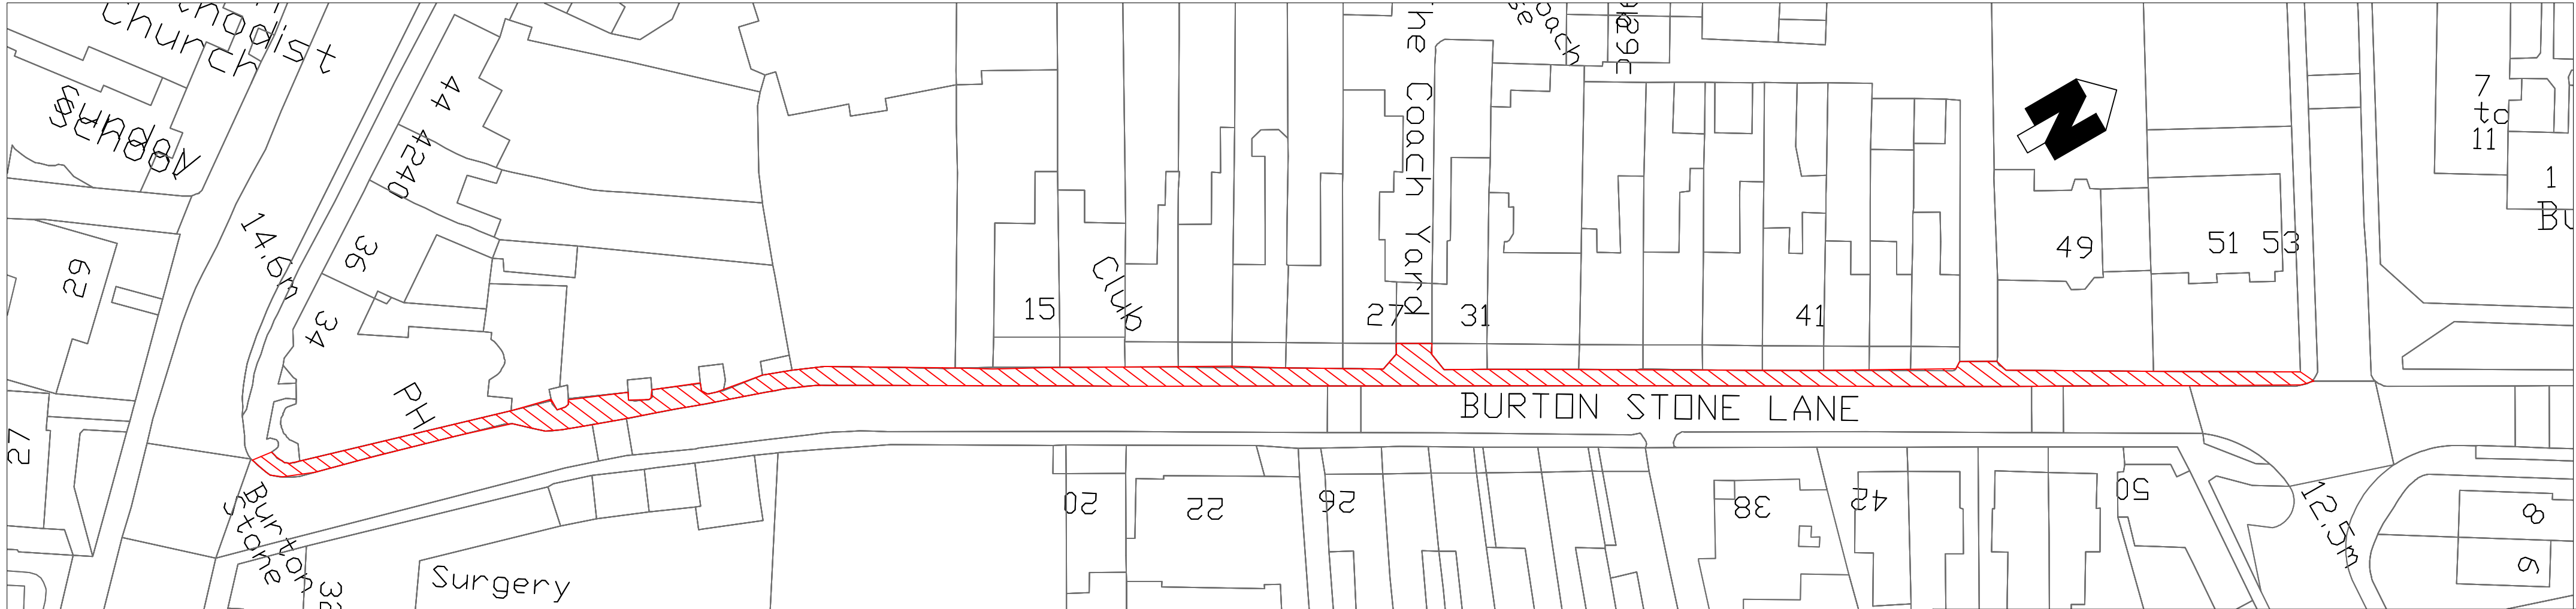

© CROWN COPYRIGHT.City of York Council OS Licence No. 1000 20818

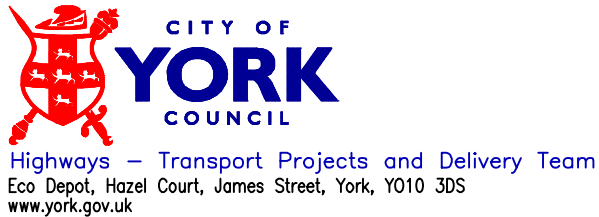

INITIAL	REV
DRAWN BY CSS	
CHECKED BY A N OTHER	
SCALE 1:0000	A2
DATE Oct 2019	

AMENDMENT	DATE


2020-2021 Programme
Footway Resurfacing
Burton Stone Lane
Clifton

2020/2021-FW-06

LTP FOOTWAYS

ITEM	6		
LOCATION	St Nicholas Crescent		
ROAD NO			
WARD/PARISH	Copmanthorpe		
SCHEME DRAWING NO			
DESCRIPTION OF WORK	T21		
<i>SPECIFICATION RECOMMENDATION</i>	T21 reconstruction , - kerbs don't match up to driveways		
CW WIDTH		FW WIDTH	
CW LENGTH		FW LENGTH	
CW AREA		FW AREA	460
FEE			
TOTAL ESTIMATE	£34500		

NOTES	Most kerbing – if not all- to be replaced and realigned with driveways.
-------	---

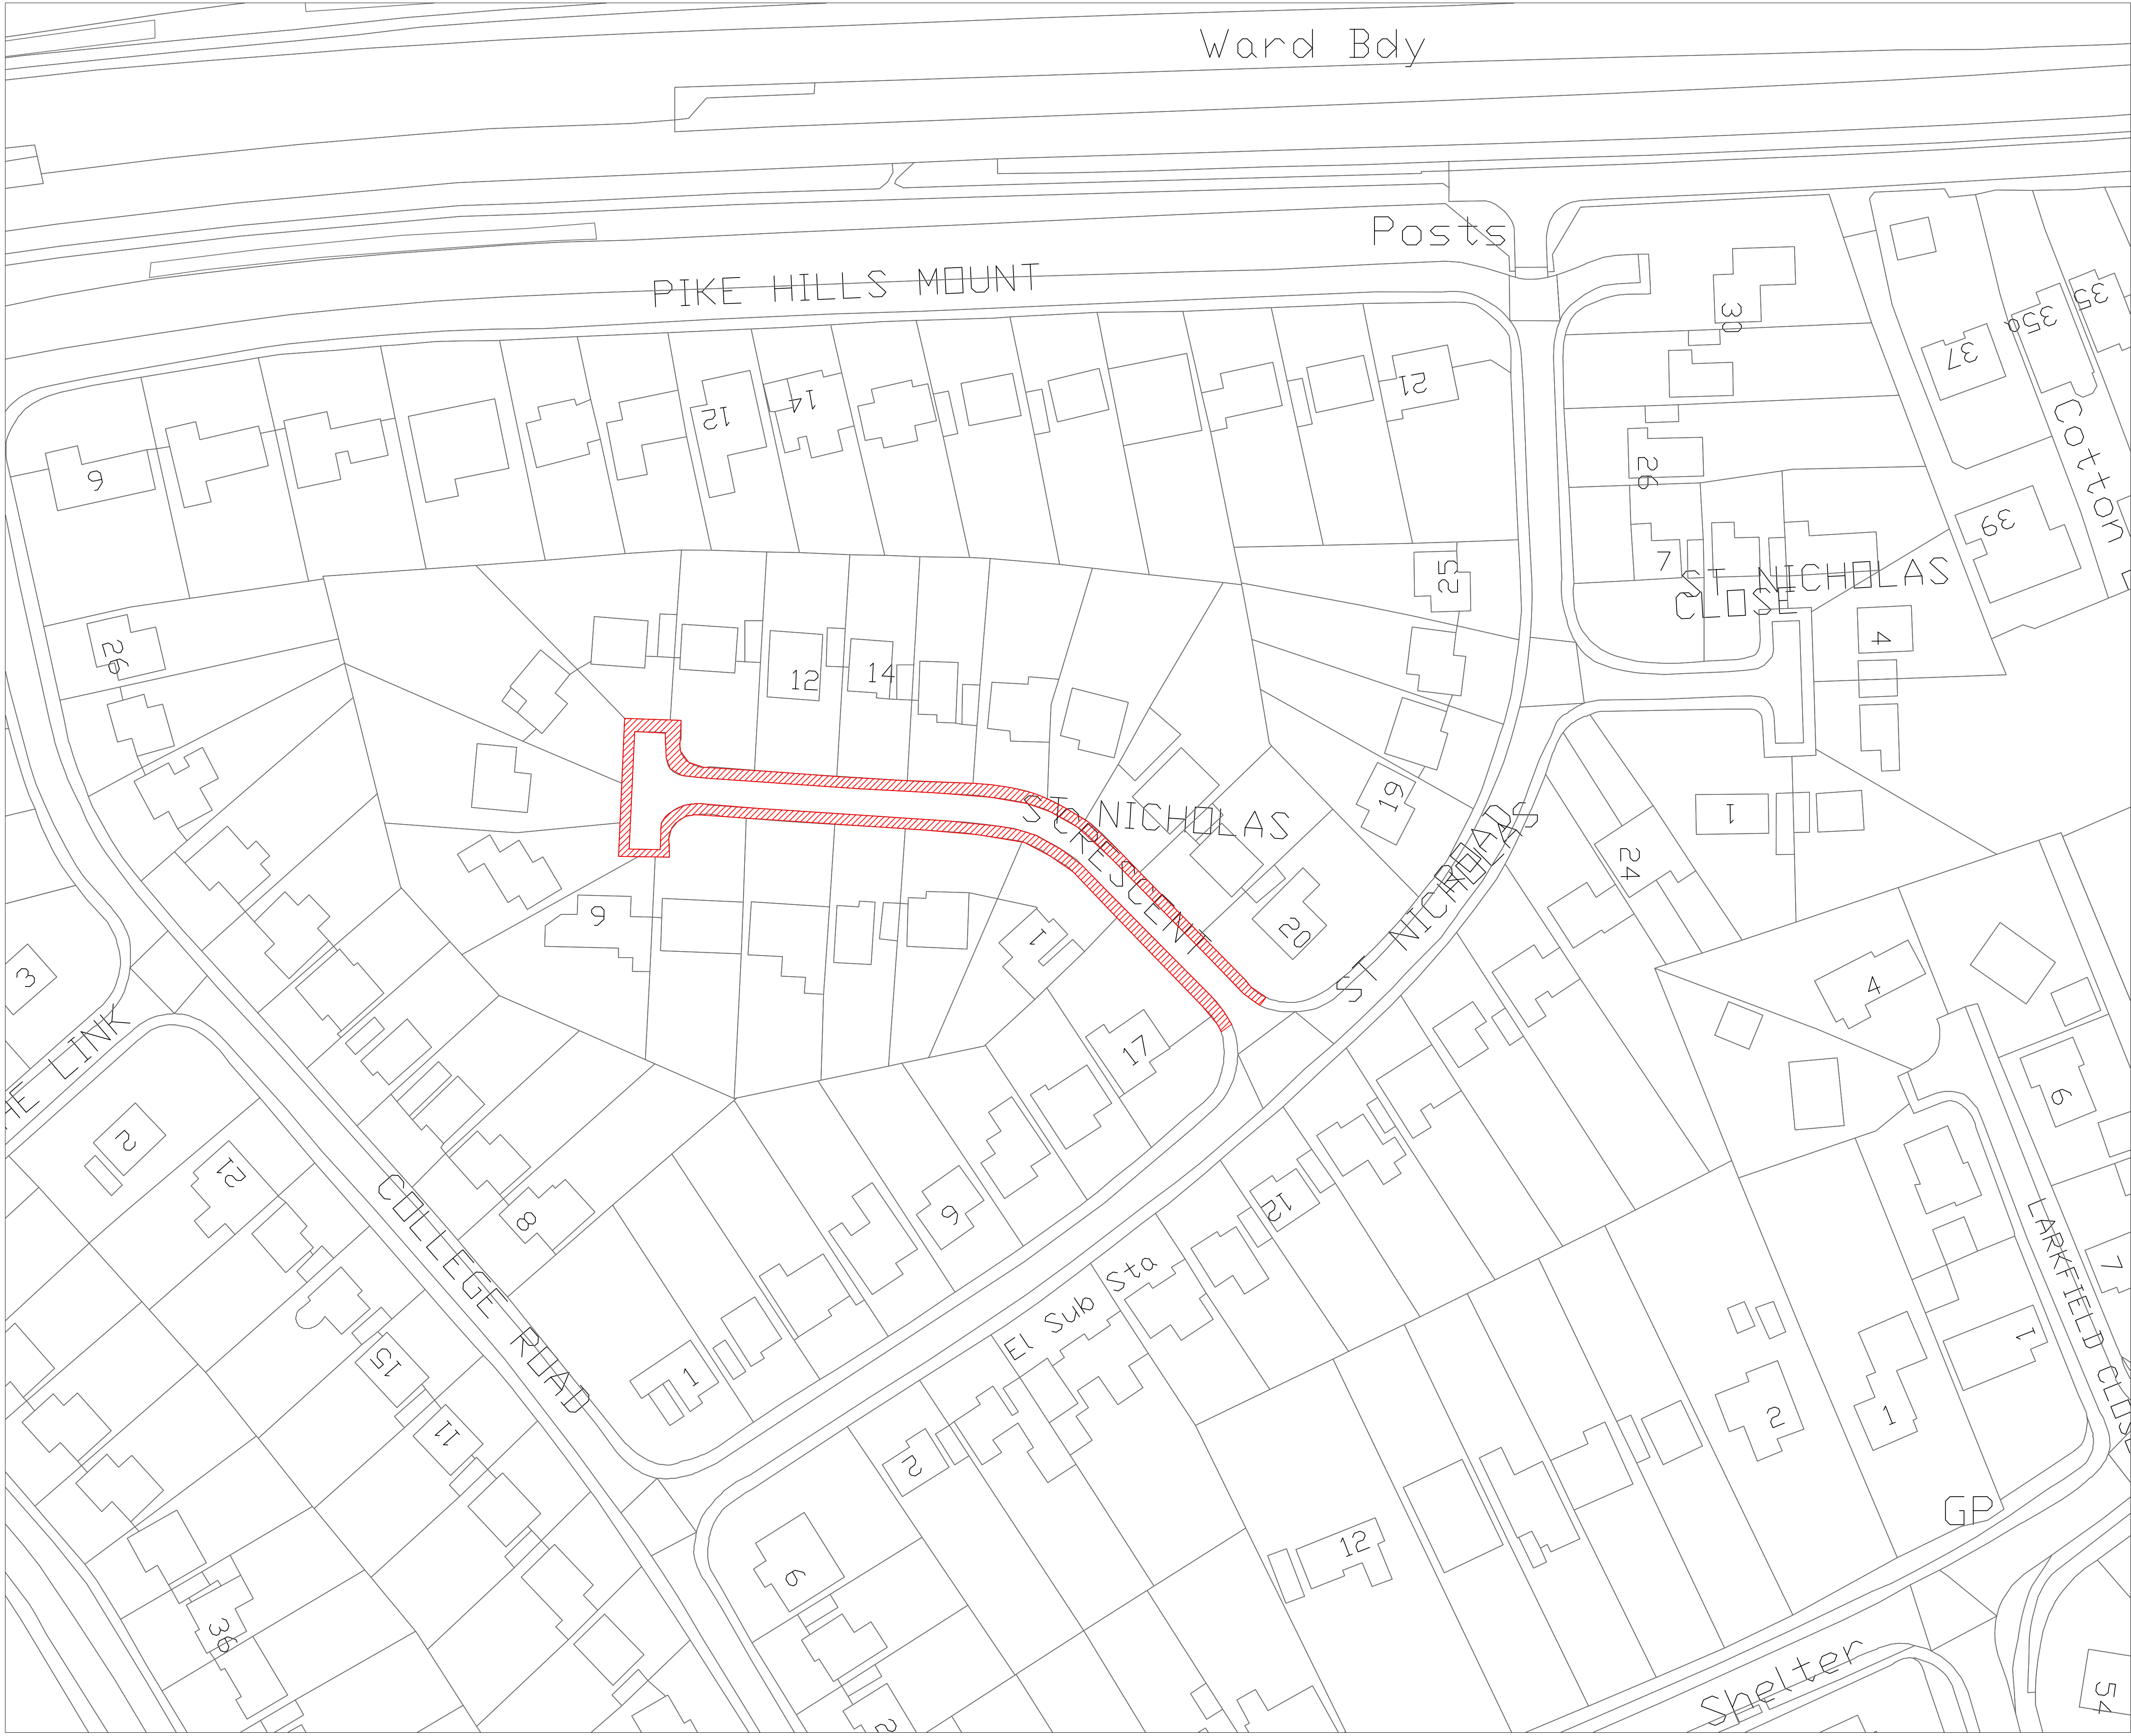


- NOTES:
1. All dimensions in metres unless otherwise stated.
 2. Do not scale from this drawing.
 3. Any issues should be raised with the scheme engineer immediately.

KEY:

 LOCATION OF WORKS 460m²

T21- kerbs to be replaced/ repaired.
Kerbing does not align with driveways- to be adjusted to fit

BASED UPON THE ORDNANCE SURVEY MAPING WITH THE PERMISSION OF THE CONTROLLER OF HER MAJESTY'S STATIONERY OFFICE. © CROWN COPYRIGHT. UNAUTHORISED REPRODUCTION INFRINGES CROWN COPYRIGHT AND MAY LEAD TO PROSECUTION OR CIVIL PROCEEDINGS. City of York Council OS Licence No. 1000 20818					
DRAFT ISSUE					
A	XX	XX	XX	DX/17	
Revision	By	Checked	Approved	Date	Description

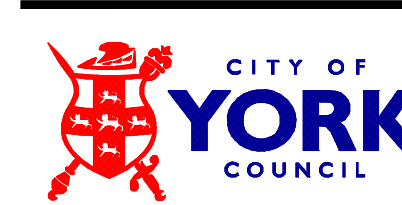

CITY OF YORK COUNCIL

Highways – Transport Projects and Delivery Team
Eos Depot, Hazel Court, James Street, York, YO10 3DS
www.york.gov.uk

Project 2020-21 Carriageway Footway Resurfacing

Drawing St Nicholas Crescent Copmanthorpe

Drawn by CSS	Date: May 20
Checked by A N OTHER	Date: XXXXXX
Authorised by A N OTHER	Date: XXXXXX

Drawing No. HMS21/	Revision A
--------------------------	------------

Drawing Scale: 1:12500	A1
CAD Filename: Computer Filename	Plot Scale: 1:00

LTP FOOTWAYS

ITEM	7		
LOCATION	Beckfield Lane- part		
ROAD NO			
WARD/PARISH	Acomb		
SCHEME DRAWING NO			
DESCRIPTION OF WORK	T21		
<i>SPECIFICATION RECOMMENDATION</i>			
CW WIDTH		FW WIDTH	
CW LENGTH		FW LENGTH	
CW AREA		FW AREA	941
FEE			
TOTAL ESTIMATE	£79985		

NOTES	Boroughbridge rd To Norman Drive
-------	---

LTP FOOTWAYS

ITEM	8		
LOCATION	Hamilton Dv & HDEast- Holly bank end both sides. O/S Nos 50-74 north side, 79-Rosemount Ct on south side		
ROAD NO			
WARD/PARISH	Holgate		
SCHEME DRAWING NO			
DESCRIPTION OF WORK	Currently paved- but ++root damage- if allowed- resurface in T21. Otherwise repave, but may not be able to do all in paving for budget?		
SPECIFICATION RECOMMENDATION	T21		
CW WIDTH		FW WIDTH	
CW LENGTH		FW LENGTH	
CW AREA		FW AREA	732
FEE			
TOTAL ESTIMATE	£62220		

NOTES	School next to site- needs timing to be in holidays Can only do one side at a time- heavy pedestrian use
-------	---

Roman Catholic
Primary School

site 7
223m2

site 6
385m2

- NOTES:
1. All dimensions in metres unless otherwise stated.
 2. Do not scale from this drawing.
 3. Any issues should be raised with the scheme engineer immediately.

KEY:

 Location of FW works site 6 & 7
area 6 =385 + 20%= 462 m2
area 7= 223+20%=270
Total= 732m2 inc Vxings

HSE
School nearby
Watercourse next to site
overhanging trees

BASED UPON THE ORDNANCE SURVEY MAPING WITH THE PERMISSION OF THE CONTROLLER OF HER MAJESTY'S STATIONARY OFFICE. © CROWN COPYRIGHT. UNAUTHORISED REPRODUCTION OR CIVIL PROCESSING. City of York Council OS Licence No. 1000 20818

DRAWING TYPE

Revision	By	Checked	Approved	Date	Description



Highways – Transport Projects and Delivery Team
Eco Depot, Hazel Court, James Street, York, YO10 3DS
www.york.gov.uk

Project
2022-23 FOOTWAYS WORKS
LOCATION 5
Beech ave To Holgate beck


Drawing
Proposed Programmes
HAMILTON DRIVE
ACOMB

Drawn by	CSS	Date:	03/04/2019
Checked by		Date:	
Authorised by		Date:	
Drawing No.		Revision	A
Drawing Scale:	NTS		A0
CAD Filename:		Plot Scale:	NTS

LTP FOOTWAYS

ITEM	9		
LOCATION	Greengales Lane		
ROAD NO			
WARD/PARISH	Wheldrake		
SCHEME DRAWING NO			
DESCRIPTION OF WORK	T15 one side only		
<i>SPECIFICATION RECOMMENDATION</i>	From Broadlands to Courtneys		
CW WIDTH		FW WIDTH	
CW LENGTH		FW LENGTH	
CW AREA		FW AREA	270
FEE			
TOTAL ESTIMATE	£16200		


NOTES	One side only
School and playing fields nearby
Busy connecting road between villages
-------	---

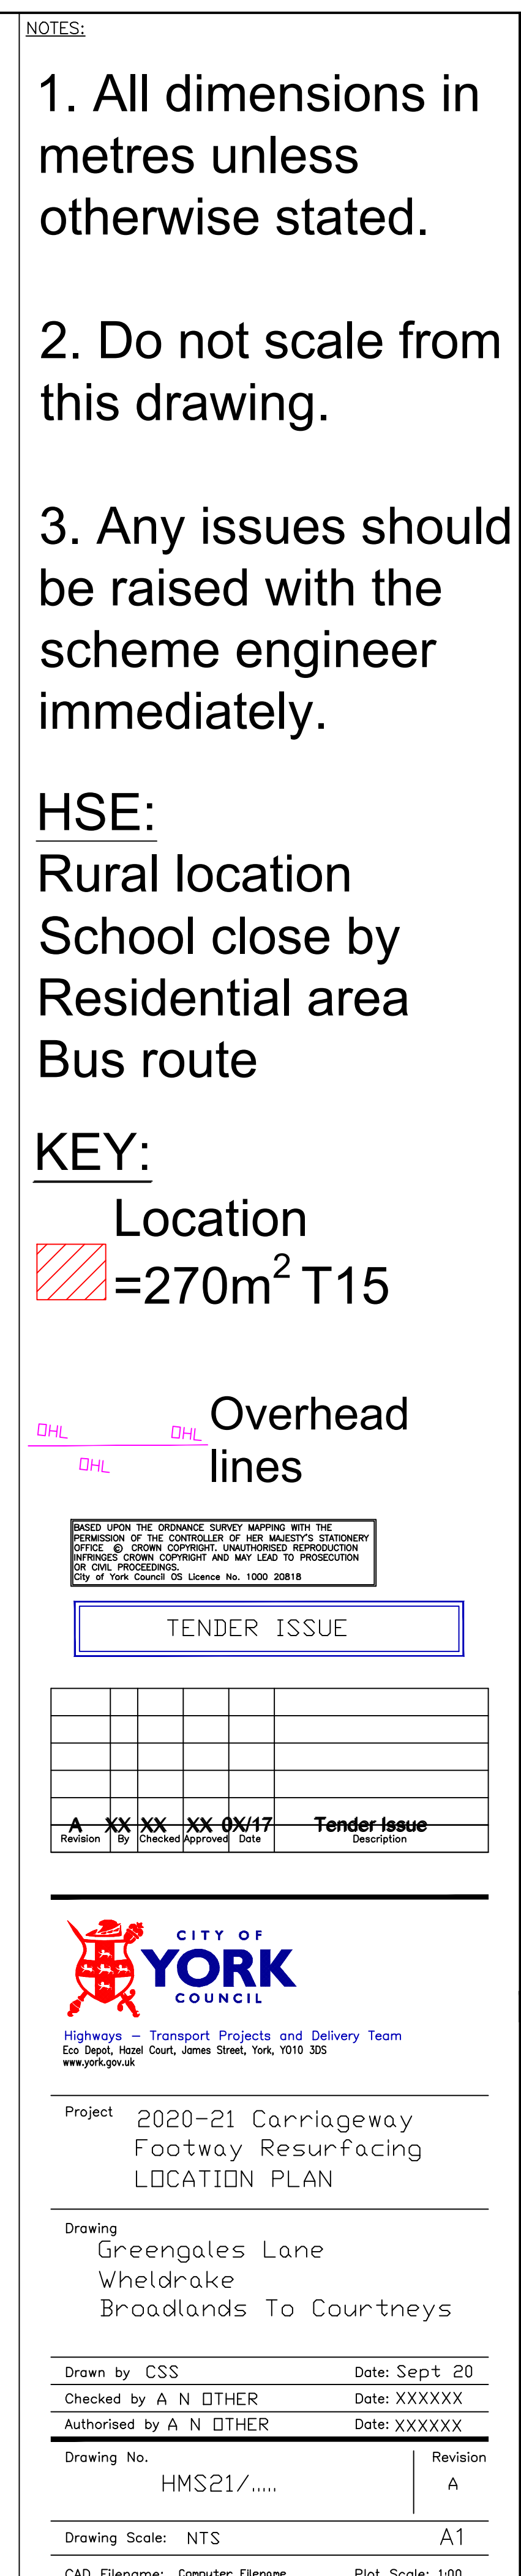

LTP FOOTWAYS

ITEM	10		
LOCATION	High Oaks		
ROAD NO			
WARD/PARISH	Heworth		
SCHEME DRAWING NO			
DESCRIPTION OF WORK	T15 m, T21 at Vehicle crossings- one side only		
<i>SPECIFICATION RECOMMENDATION</i>			
CW WIDTH		FW WIDTH	
CW LENGTH		FW LENGTH	
CW AREA		FW AREA	240
FEE			
TOTAL ESTIMATE	£22200		

NOTES	One side only
-------	--

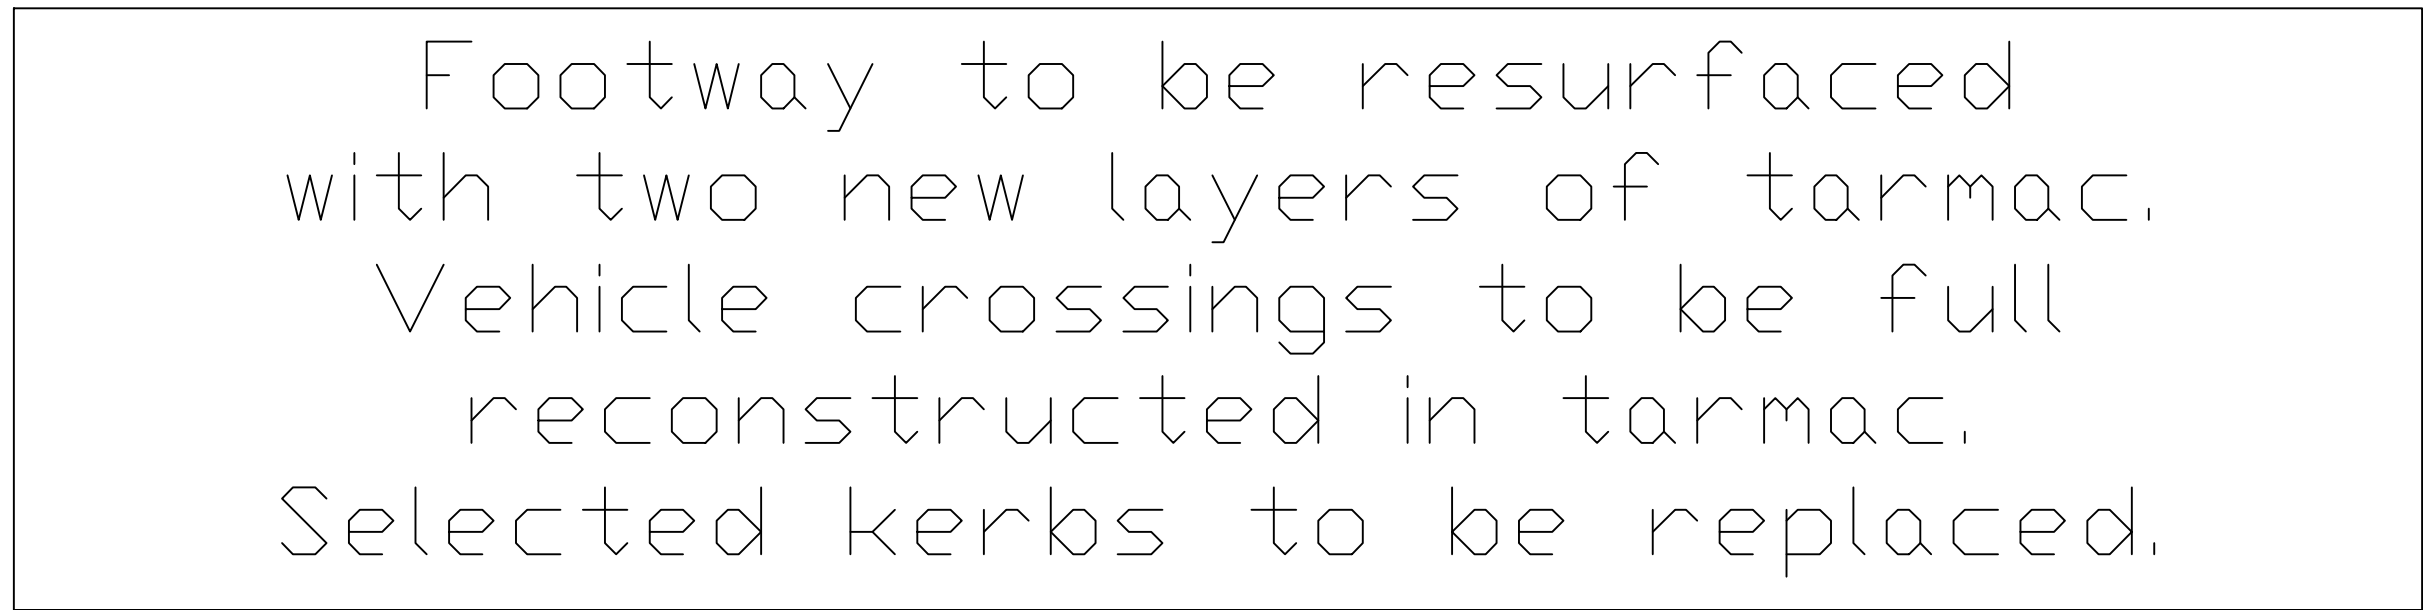

NOTES:

1. All dimensions in metres unless otherwise stated.

2. Do not scale from this drawing.

3. Any issues should be raised with the scheme engineer immediately.

 Type 15
Reconstruction
Type 21
reconstruction
at vehihcle
crossings
200m²

TENDER ISSUE

A	XX	XX	XX	0X/17	Tender Issue
Revision	By	Checked	Approved	Date	Description



Project	2020-21 Footway Footway Resurfacing Extent of works
---------	---

Drawing High Oaks
Heworth Without Ward
North side of street

Drawn by	S. Ensor	Date:	30-10-2
Checked by	A N OTHER	Date:	XXXXXX
Authorised by		Date:	

Drawing No. H021 | Revision

NTS


Drawing Scale: Computer Filename A1 1:0

CAD Filename: Plot Scale:

LTP FOOTWAYS


ITEM	11		
LOCATION	Hyrst grove		
ROAD NO			
WARD/PARISH	Heworth		
SCHEME DRAWING NO			
DESCRIPTION OF WORK	T21 both sides		
<i>SPECIFICATION RECOMMENDATION</i>			
CW WIDTH		FW WIDTH	
CW LENGTH		FW LENGTH	
CW AREA		FW AREA	510
FEE			
TOTAL ESTIMATE	£30600		

NOTES	
-------	-------------

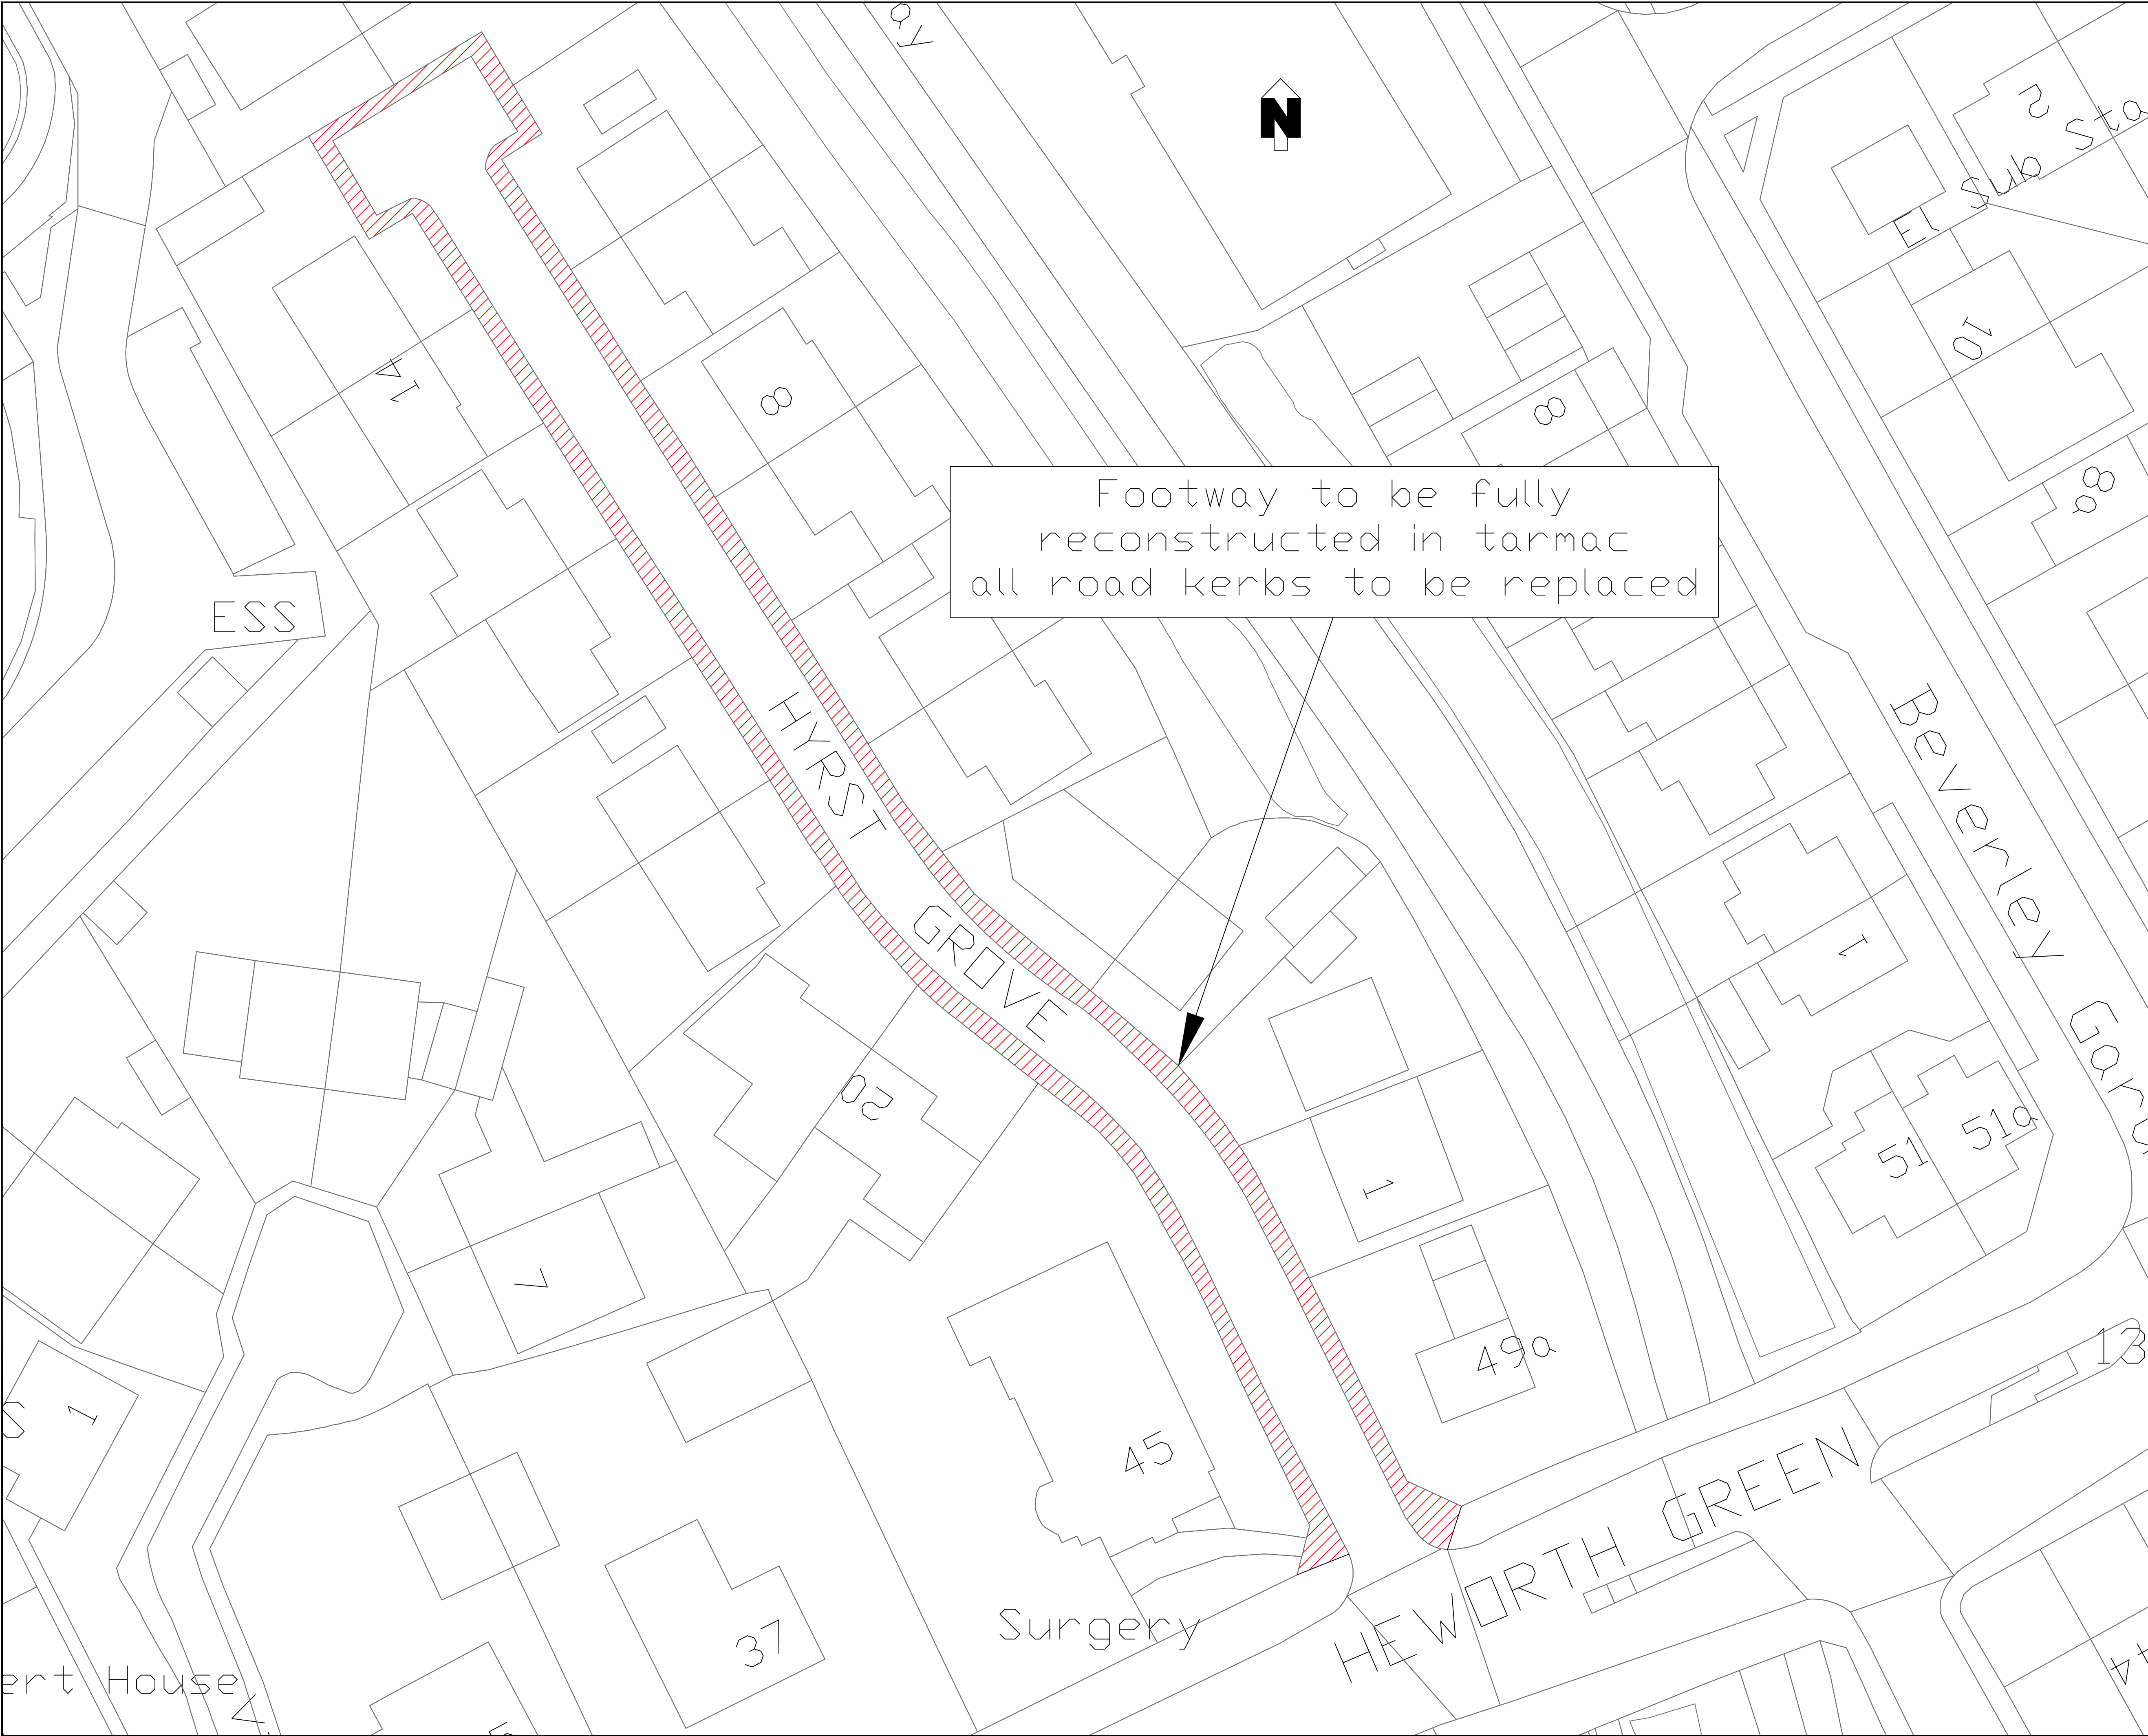

- NOTES:
1. All dimensions in metres unless otherwise stated.
 2. Do not scale from this drawing.
 3. Any issues should be raised with the scheme engineer immediately.

KEY:

 Type 21 reconstruction + kerbs

510 m²

BASED UPON THE ORDINANCE SURVEY MAPPING WITH THE PERMISSION OF THE CONTROLLER OF HER MAJESTY'S STATIONERY OFFICE. © CROWN COPYRIGHT. UNAUTHORISED REPRODUCTION INFRINGES CROWN COPYRIGHT AND MAY LEAD TO PROSECUTION OR CIVIL PROCEEDINGS.
City of York Council OS Licence No. 1000 20818

TENDER ISSUE

	A	XX	XX	XX	0X/17
Revision	By	Checked	Approved	Date	Description



CITY OF
YORK
COUNCIL

Highways – Transport Projects and Delivery Team
Eon Depot, Hazel Court, James Street, York, YO10 3DS
www.york.gov.uk

Project 2020–21 Footway
Footway Reconstruction
Extents PLAN

Drawing Hyrst Grove
Heworth Ward
Full Street

Drawn by S.Ensor Date: 30-10-20
Checked by A N OTHER Date: XXXXXX
Authorised by Date:

Drawing No. HG21 Revision

NTS A1

Drawing Scale: Computer: Filename Plot Scale:

CAD Filename: Plot Scale:

LTP FOOTWAYS


ITEM	12		
LOCATION	Melbourne St		
ROAD NO			
WARD/PARISH	Fishergate		
SCHEME DRAWING NO			
DESCRIPTION OF WORK	T21 to north side		
<i>SPECIFICATION RECOMMENDATION</i>			
CW WIDTH		FW WIDTH	
CW LENGTH		FW LENGTH	
CW AREA		FW AREA	445
FEE			
TOTAL ESTIMATE	43000		

NOTES	54 m kerbing
-------	---

Notes

- HSE Notes

Site 16

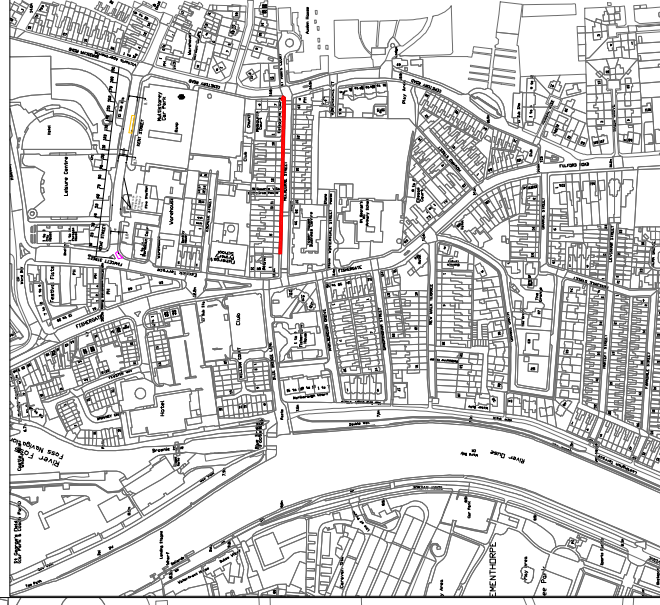

L:\DOCUMENT\ENGINEER\HMS\2019-2020\CAROLINE\FORWARD PLANNING PROJECT\Footways Book 2020-21\NOVEMBER REVIEW OF FOOTWAYS- CURRENT LIST\WELBourne Std.dwg

LTP FOOTWAYS

ITEM	13		
LOCATION	Lendal judges lodgings side		
ROAD NO			
WARD/PARISH	Guildhall		
SCHEME DRAWING NO			
DESCRIPTION OF WORK	Conservation Paving		
<i>SPECIFICATION RECOMMENDATION</i>			
CW WIDTH		FW WIDTH	
CW LENGTH		FW LENGTH	
CW AREA		FW AREA	275
FEE			
TOTAL ESTIMATE	£82470		

NOTES	Shop frontages on site Multiple ironworks & cross path metal gutter gullies within site Pub ent Busy pedestrian traffic at all times
-------	---

NOTES:

2021-22 Potential Highways Works sites

LENDAL
JUDGES LODGINGS
SIDE

Conservation paving&kerbing

HSE

Shop frontages on site

Multiple ironworks &

cross path metal gutte

gullies within site

Pub ent

Busy pedestrian traffic

at all times

Location of



Education of Works

Area = 275m

Area 27011

BASED UPON THE ORDNANCE SURVEY MAPPING WITH THE PERMISSION OF THE CONTROLLER OF HER MAJESTY'S STATIONERY OFFICE © CROWN COPYRIGHT, UNAUTHORISED REPRODUCTION INFRINGES CROWN COPYRIGHT AND MAY LEAD TO PROSECUTION OR CIVIL PROCEEDINGS.

CITY OF YORK COUNCIL OS LICENCE NO. 1000 20818

DRAWING TYPE

DRAWING TYPE

Revision	By	Checked	Approved	Date	Description

Revision	by	checked	approved	date	Description

 CITY OF SAN FRANCISCO

YORK
COUNCIL

Highways – Transport Projects and Delivery Team
Eco Depot, Hazel Court, James Street, York, YO10 3DS

Project

2021-22 Highways Programme
FootwaysFootways
Location & Works Plan

Drawing
LENDAL

JUDGES LODGINGS SIDE
GUILDHALL

Drawn by CSS Date: 03/09/20

Checked by	Date:
Authorised by	Date:

Drawing No.	Revision
	A

Drawing Scale: NTS AO



CAD Filename: Plot Scale: NTS

2021-22 Highways programme\DWGS for proposed 21-22 programme\LENDAL\LENDAL FW_ JURGES LOIGINGS SIDE.asp	
---	--

LTP FOOTWAYS

ITEM	14		
LOCATION	Coppergate		
ROAD NO			
WARD/PARISH	Guildhall		
SCHEME DRAWING NO			
DESCRIPTION OF WORK	3 Tuns to crossing (ousegate)- one side only		
<i>SPECIFICATION RECOMMENDATION</i>	Conservation Paving		
CW WIDTH		FW WIDTH	
CW LENGTH		FW LENGTH	
CW AREA		FW AREA	100
FEE			
TOTAL ESTIMATE	£29553		

NOTES	Shop frontages on site
Cross path metal gutter
gullies within works
Pub ent
Busy pedestrian traffic
-------	--

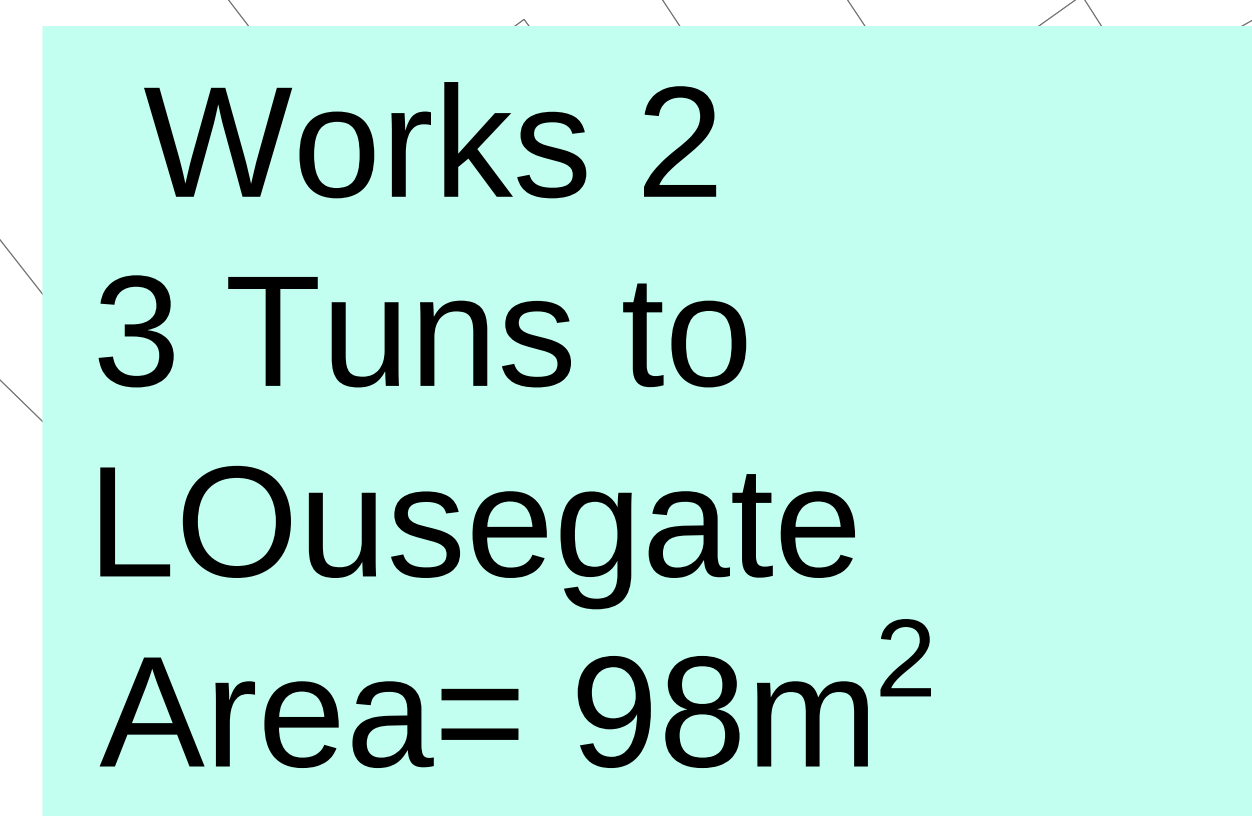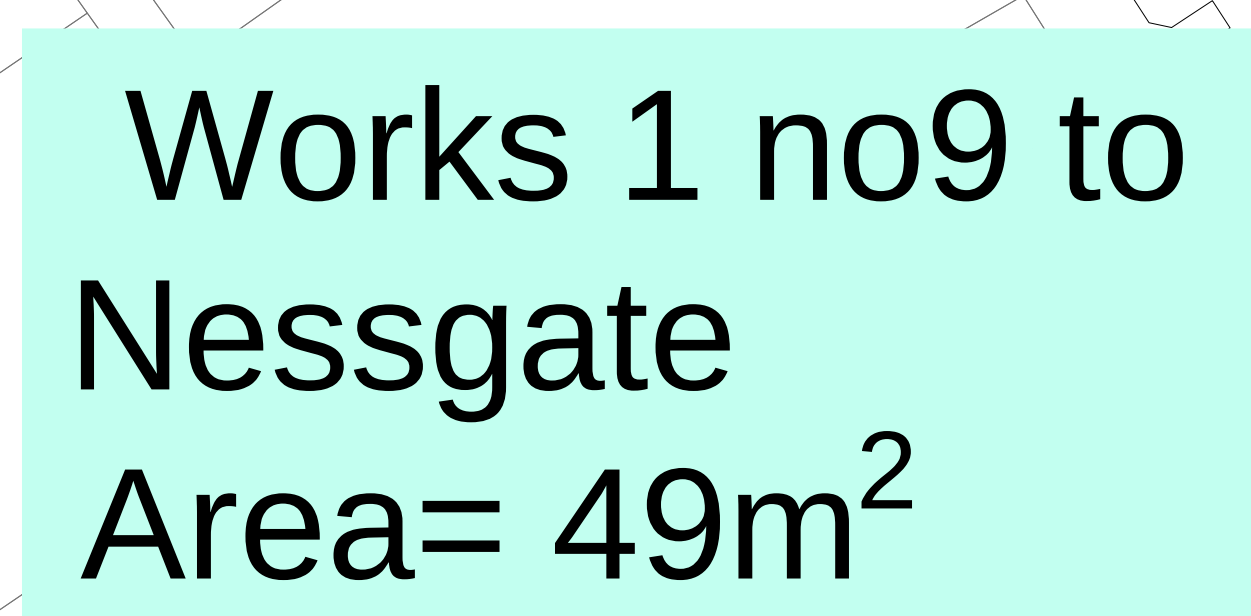

ZEBRA XING

NOTES:

2021-22 Potential Highways Works sites

COPPERGATE

3 Tuns to Low
Ousegate & NO 9 to
low Ousegate
Conservation paving &
kerbing
HSE
Shop frontages on site
Multiple ironworks &
cross path metal gutter
gullies within site
Pub ent
Busy pedestrian traffic
at all times

Location of
Works Total
Area= 148m²

2021 works=
site 2
98m² only

BASED UPON THE ORDNANCE SURVEY MAPPING WITH THE PERMISSION OF THE CONTROLLER OF HER MAJESTY'S STAT. OFFICE © CROWN COPYRIGHT, UNAUTHORISED REPRODUCTION INFRINGES CROWN COPYRIGHT AND MAY LEAD TO PROSECUTION OR CIVIL PROCEEDINGS.

City of York Council OS Licence No. 1000 2011/8

DRAWING TYPE

[illegible]

Highways – Transport Projects and Delivery Team
Eco Depot, Hazel Court, James Street, York, YO10 3DS
www.york.gov.uk

Project
2021-22 Highways Programme
Footways
Location & Works Plan

Drawing


COPPERGATE- 3 Tuns- L Dusegate
& no 9 to Nessgate
GUILDHALL

Drawn by	CSS	Date:	03/09/2020
Checked by		Date:	
Authorised by		Date:	
Drawing No.		Revision	A
Drawing Scale:	NTS		AO
CAD Filename:		Plot Scale:	NTS

LTP FOOTWAYS

ITEM	15		
LOCATION	Blake Street		
ROAD NO			
WARD/PARISH	Guildhall		
SCHEME DRAWING NO			
DESCRIPTION OF WORK	Stonegate to 17		
<i>SPECIFICATION RECOMMENDATION</i>	Conservation Paving		
CW WIDTH		FW WIDTH	
CW LENGTH		FW LENGTH	
CW AREA		FW AREA	66
FEE			
TOTAL ESTIMATE	£19710		

NOTES	Shop frontages on site Cross path metal gutter gullies within works Pub ent Busy pedestrian traffic
-------	---

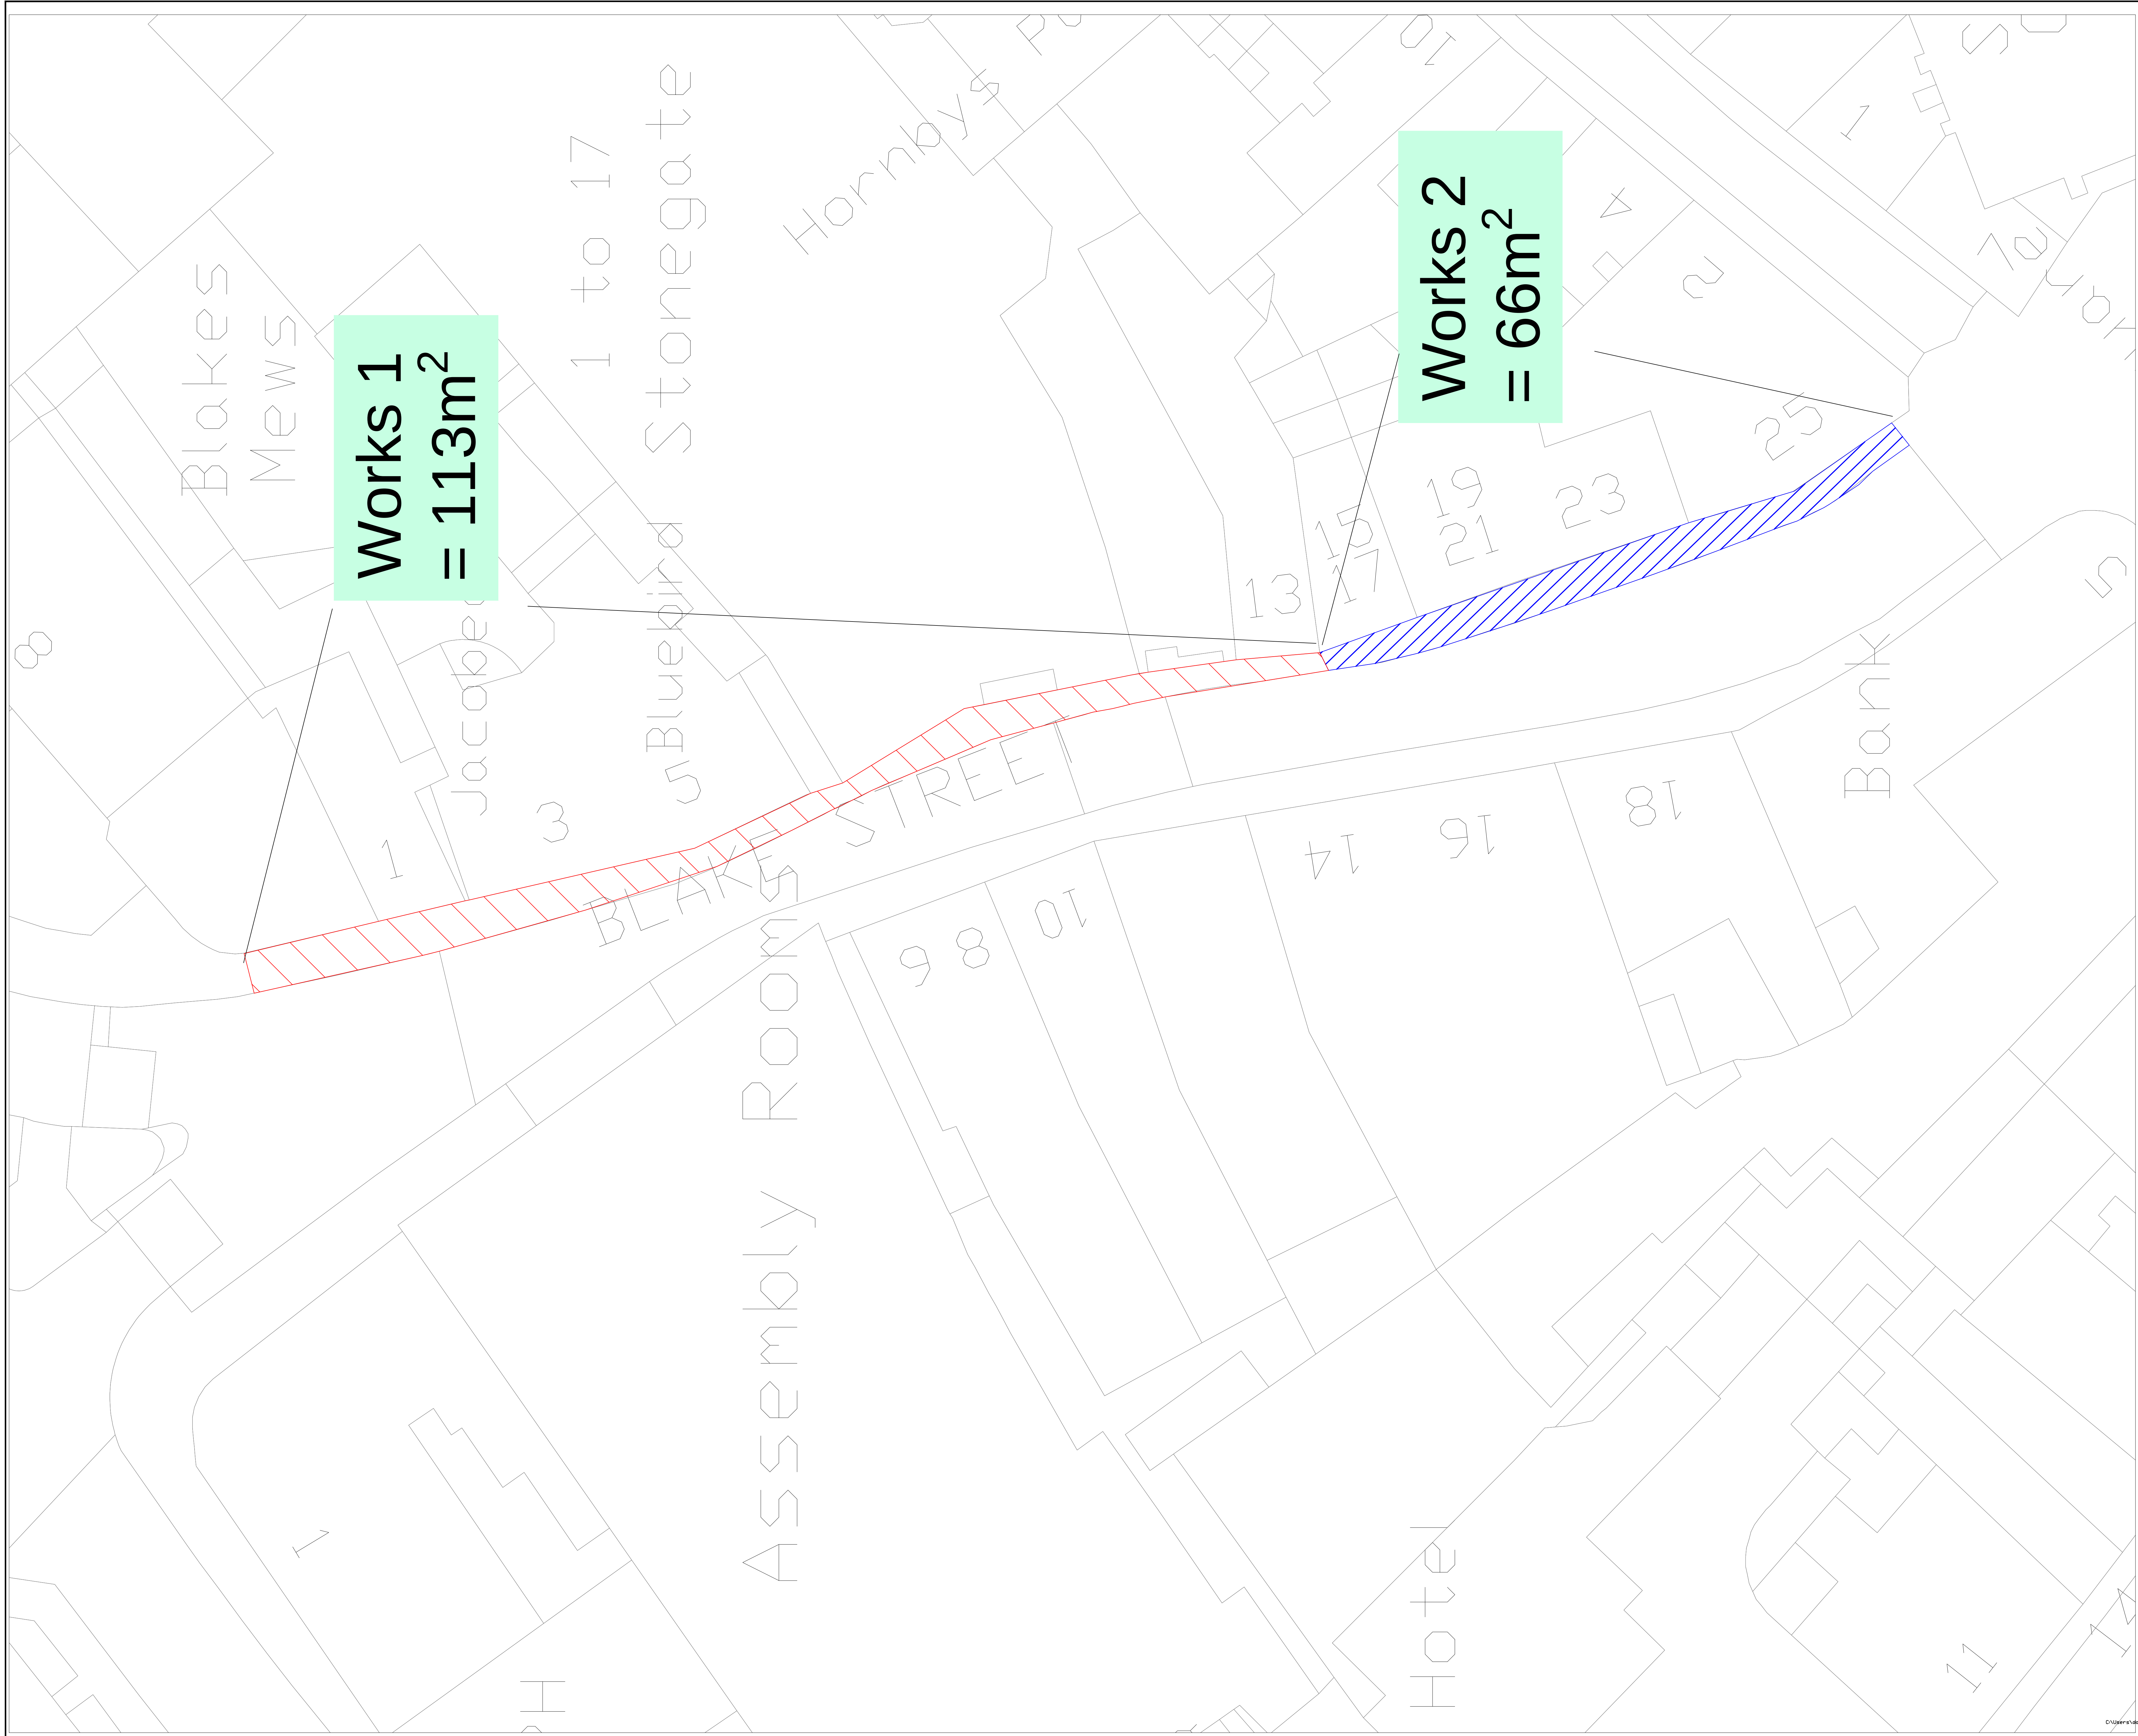

NOTES:

2021-22 Potential
Highways Works sites

BLAKE ST-
Conservation paving&
kerbing

HSE
Shop frontages on site
Multiple ironworks &
cross path metal gutter
gullies within site
Busy pedestrian traffic
at all times

Location of
Works 1- no 1-
17
Total Area =
113m²

Location of Works
2- no17- 25
Total Area 2=
66m²

BASED UPON THE ORDNANCE SURVEY MAPING WITH THE
PERMISSION OF THE CONTROLLER OF HER MAJESTY'S STATIONERY
OFFICE. © CROWN COPYRIGHT. UNAUTHORISED REPRODUCTION
INFRINGES CROWN COPYRIGHT AND MAY LEAD TO PROSECUTION
OR CIVIL PROCEEDINGS
City of York Council OS Licence No. 1000 20818

DRAWING TYPE

Revision	By	Checked	Approved	Date	Description



Highways – Transport Projects and Delivery Team
Eco Depot, Hazel Court, James Street, York, YO10 3DS
www.york.gov.uk

Project
2021-22 Highways programme
FOOTWAYS
LOCATION & WORKS

Drawing
Proposed Programmes
BLAKE ST- 1 & 2
GUILDHALL

Drawn by CSS Date: 03/04/2019
Checked by Date:
Authorised by Date:

Drawing No. Revision
A


Drawing Scale: 1:20000 A0

CAD Filename: Plot Scale:20000

LTP FOOTWAYS

ITEM	16		
LOCATION	Blake Street		
ROAD NO			
WARD/PARISH	Guildhall		
SCHEME DRAWING NO			
DESCRIPTION OF WORK	No1 to 17		
<i>SPECIFICATION RECOMMENDATION</i>	Conservation Paving		
CW WIDTH		FW WIDTH	
CW LENGTH		FW LENGTH	
CW AREA		FW AREA	113
FEE			
TOTAL ESTIMATE	£33969		

NOTES	Shop frontages on site Cross path metal gutter gullies within works Pub ent Busy pedestrian traffic
-------	---

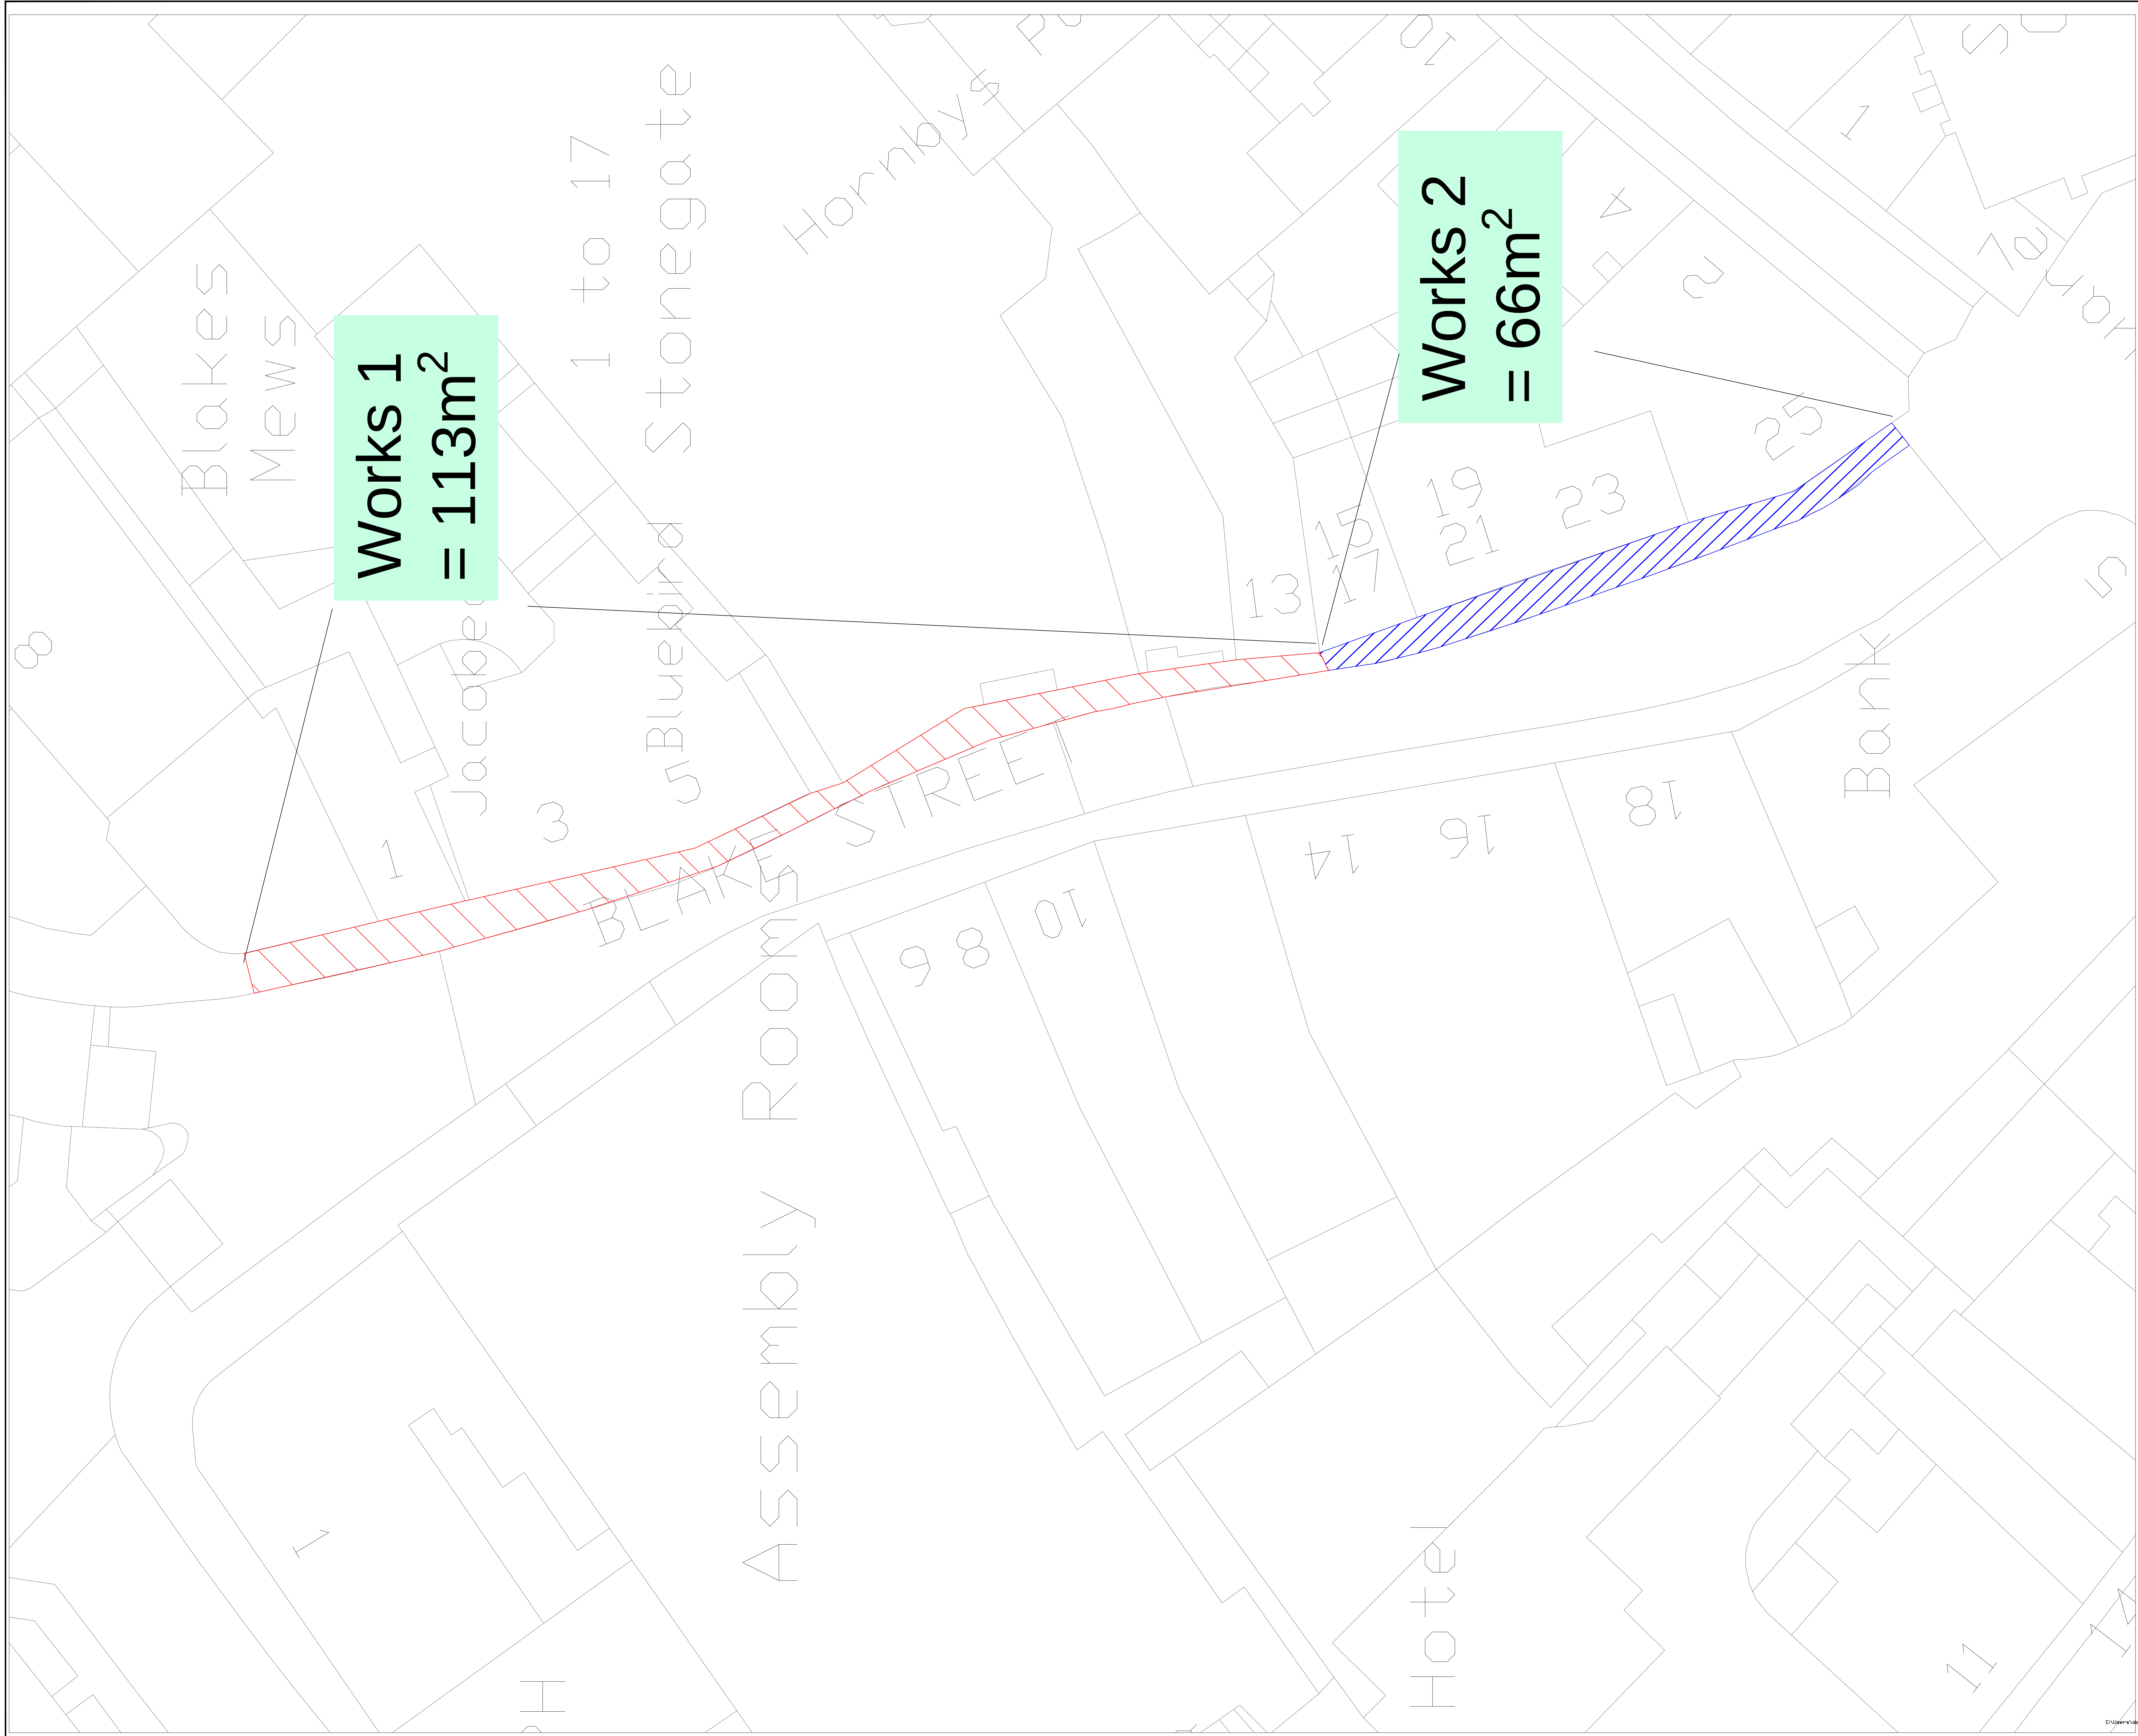

NOTES:

2021-22 Potential
Highways Works sites

BLAKE ST-
Conservation paving&
kerbing

HSE
Shop frontages on site
Multiple ironworks &
cross path metal gutter
gullies within site
Busy pedestrian traffic
at all times

Location of
Works 1- no 1-
17
Total Area =
113m²

Location of Works
2- no17- 25
Total Area 2=
66m²

BASED UPON THE ORDNANCE SURVEY MAPING WITH THE
PERMISSION OF THE CONTROLLER OF HER MAJESTY'S STATIONERY
OFFICE. © CROWN COPYRIGHT. UNAUTHORISED REPRODUCTION
INFRINGES CROWN COPYRIGHT AND MAY LEAD TO PROSECUTION
OR CIVIL PROCEEDINGS
City of York Council OS Licence No. 1000 20818

DRAWING TYPE

Revision	By	Checked	Approved	Date	Description



Highways – Transport Projects and Delivery Team
Eco Depot, Hazel Court, James Street, York, YO10 3DS
www.york.gov.uk

Project
2021-22 Highways programme
FOOTWAYS
LOCATION & WORKS

Drawing
Proposed Programmes
BLAKE ST- 1 & 2
GUILDHALL

Drawn by CSS Date: 03/04/2019
Checked by Date:
Authorised by Date:

Drawing No. Revision
A

Drawing Scale: 1:20000 AO

CAD Filename: Plot Scale:20000

LTP FOOTWAYS

ITEM	17		
LOCATION	Marygate		
ROAD NO			
WARD/PARISH	Guildhall		
SCHEME DRAWING NO			
DESCRIPTION OF WORK	Paving and T21 to areas of FW marked on Drawing		
SPECIFICATION RECOMMENDATION	Conservation Paving		
CW WIDTH		FW WIDTH	
CW LENGTH		FW LENGTH	
CW AREA		FW AREA	591
FEE			
TOTAL ESTIMATE	£106500		

NOTES	Cross path metal gutters gullies within works Busy pedestrian traffic Route to main tourist car park Historic walls and properties next to works River access point- lower end of road liable to flooding Watercourse adjacent to site Multiple stats installed in site Hotels within site area
-------	--



Area 1=316m²
Conservation paving & kerbs

Area 2=132m²
Conservation paving & kerbs

Area 4=28m²
Conservation paving & kerbs

Area 3=115m²
T21 & Conservation paving & kerbs

NOTES:

Mary Gate
Existing-
, RW= 3.7m narrowest point
Closure needed probably

Blue brick Channel blocks in site
++BT and fibre stats in street

Possible cobbles beneath existing

Gullies to be cleaned and checked
Footway Paving Marygate

site 1 =316m²
site 2 = 132m²
site 3=115m²
site 4=28m²
TOTAL AREA= 591m²

H&S
Access rd for a Main City Car park, Residents parking area
River Ouse next to site- flooding possible
Conservation / Historical area next to museum-

BASED UPON THE ORDNANCE SURVEY MAPPING WITH THE PERMISSION OF THE CONTROLLER OF HER MAJESTY'S STATIONERY OFFICE. A CROWN COPYRIGHT. UNAUTHORISED REPRODUCTION OF THIS DOCUMENT IS PROHIBITED AND MAY LEAD TO PROSECUTION OR CIVIL PROCEEDINGS.
City of York Council OS Licence No. 1000 20818

DRAWING TYPE

Revision	By	Checked	Approved	Date	Description



Highways – Transport Projects and Delivery Team
Eco Depot, Hazel Court, James Street, York, YO10 3DS
www.york.gov.uk

Project
2021/22 Footway Schemes

Drawing
2021 Footways
Marygate-FOOTWAYS
Bootham

Drawn by CSS Date: 17/08/2019
Checked by Date:
Authorised by Date:

Drawing No. Revision
A

Drawing Scale: 1:500 AO

CAD Filename: Plot Scale:20000

C:\Users\anttech\Desktop\17-Marygate Footway

LTP FOOTWAYS


ITEM	18		
LOCATION	Area 1 Footways- TBD		
ROAD NO			
WARD/PARISH			
SCHEME DRAWING NO			
DESCRIPTION OF WORK	Kerb repairs and prepatching followed by footway slurry sealing- to resurface over older/ crumbly surface bitmac with solid lower layers		
SPECIFICATION RECOMMENDATION	Footway Slurry seal		
CW WIDTH		FW WIDTH	
CW LENGTH		FW LENGTH	
CW AREA		FW AREA	4000-4500m<sup>2</sup>
FEE			
TOTAL ESTIMATE	£25000		

NOTES	To be decided- a contiguous estate area or large area stretches of footway that are deteriorating / spalling on the surface course but not requiring a full rebuild. Small areas of puddles/ vehicle damage / potholes/ kerbing to be prepatched prior to FWSS works. Ironworks to be adjusted during works if required by levels.
-------	---

LTP FOOTWAYS

ITEM	19		
LOCATION	Area 2 FWSS St Giles way/ Barons crescent		
ROAD NO			
WARD/PARISH	Copmanthorpe		
SCHEME DRAWING NO			
DESCRIPTION OF WORK	Kerb repairs and prepatching followed by footway slurry sealing- to resurface over older/ crumbly surface bitmac with solid lower layers		
SPECIFICATION RECOMMENDATION	Footway Slurry seal		
CW WIDTH		FW WIDTH	
CW LENGTH		FW LENGTH	
CW AREA		FW AREA	4000-4500m<sup>2</sup>
FEE			
TOTAL ESTIMATE	£25788		

NOTES	To be decided- a contiguous estate area or large area stretches of footway that are deteriorating / spalling on the surface course but not requiring a full rebuild. Small areas of puddles/ vehicle damage / potholes/ kerbing to be prepatched prior to FWSS works. Ironworks to be adjusted during works if required by levels.
-------	---

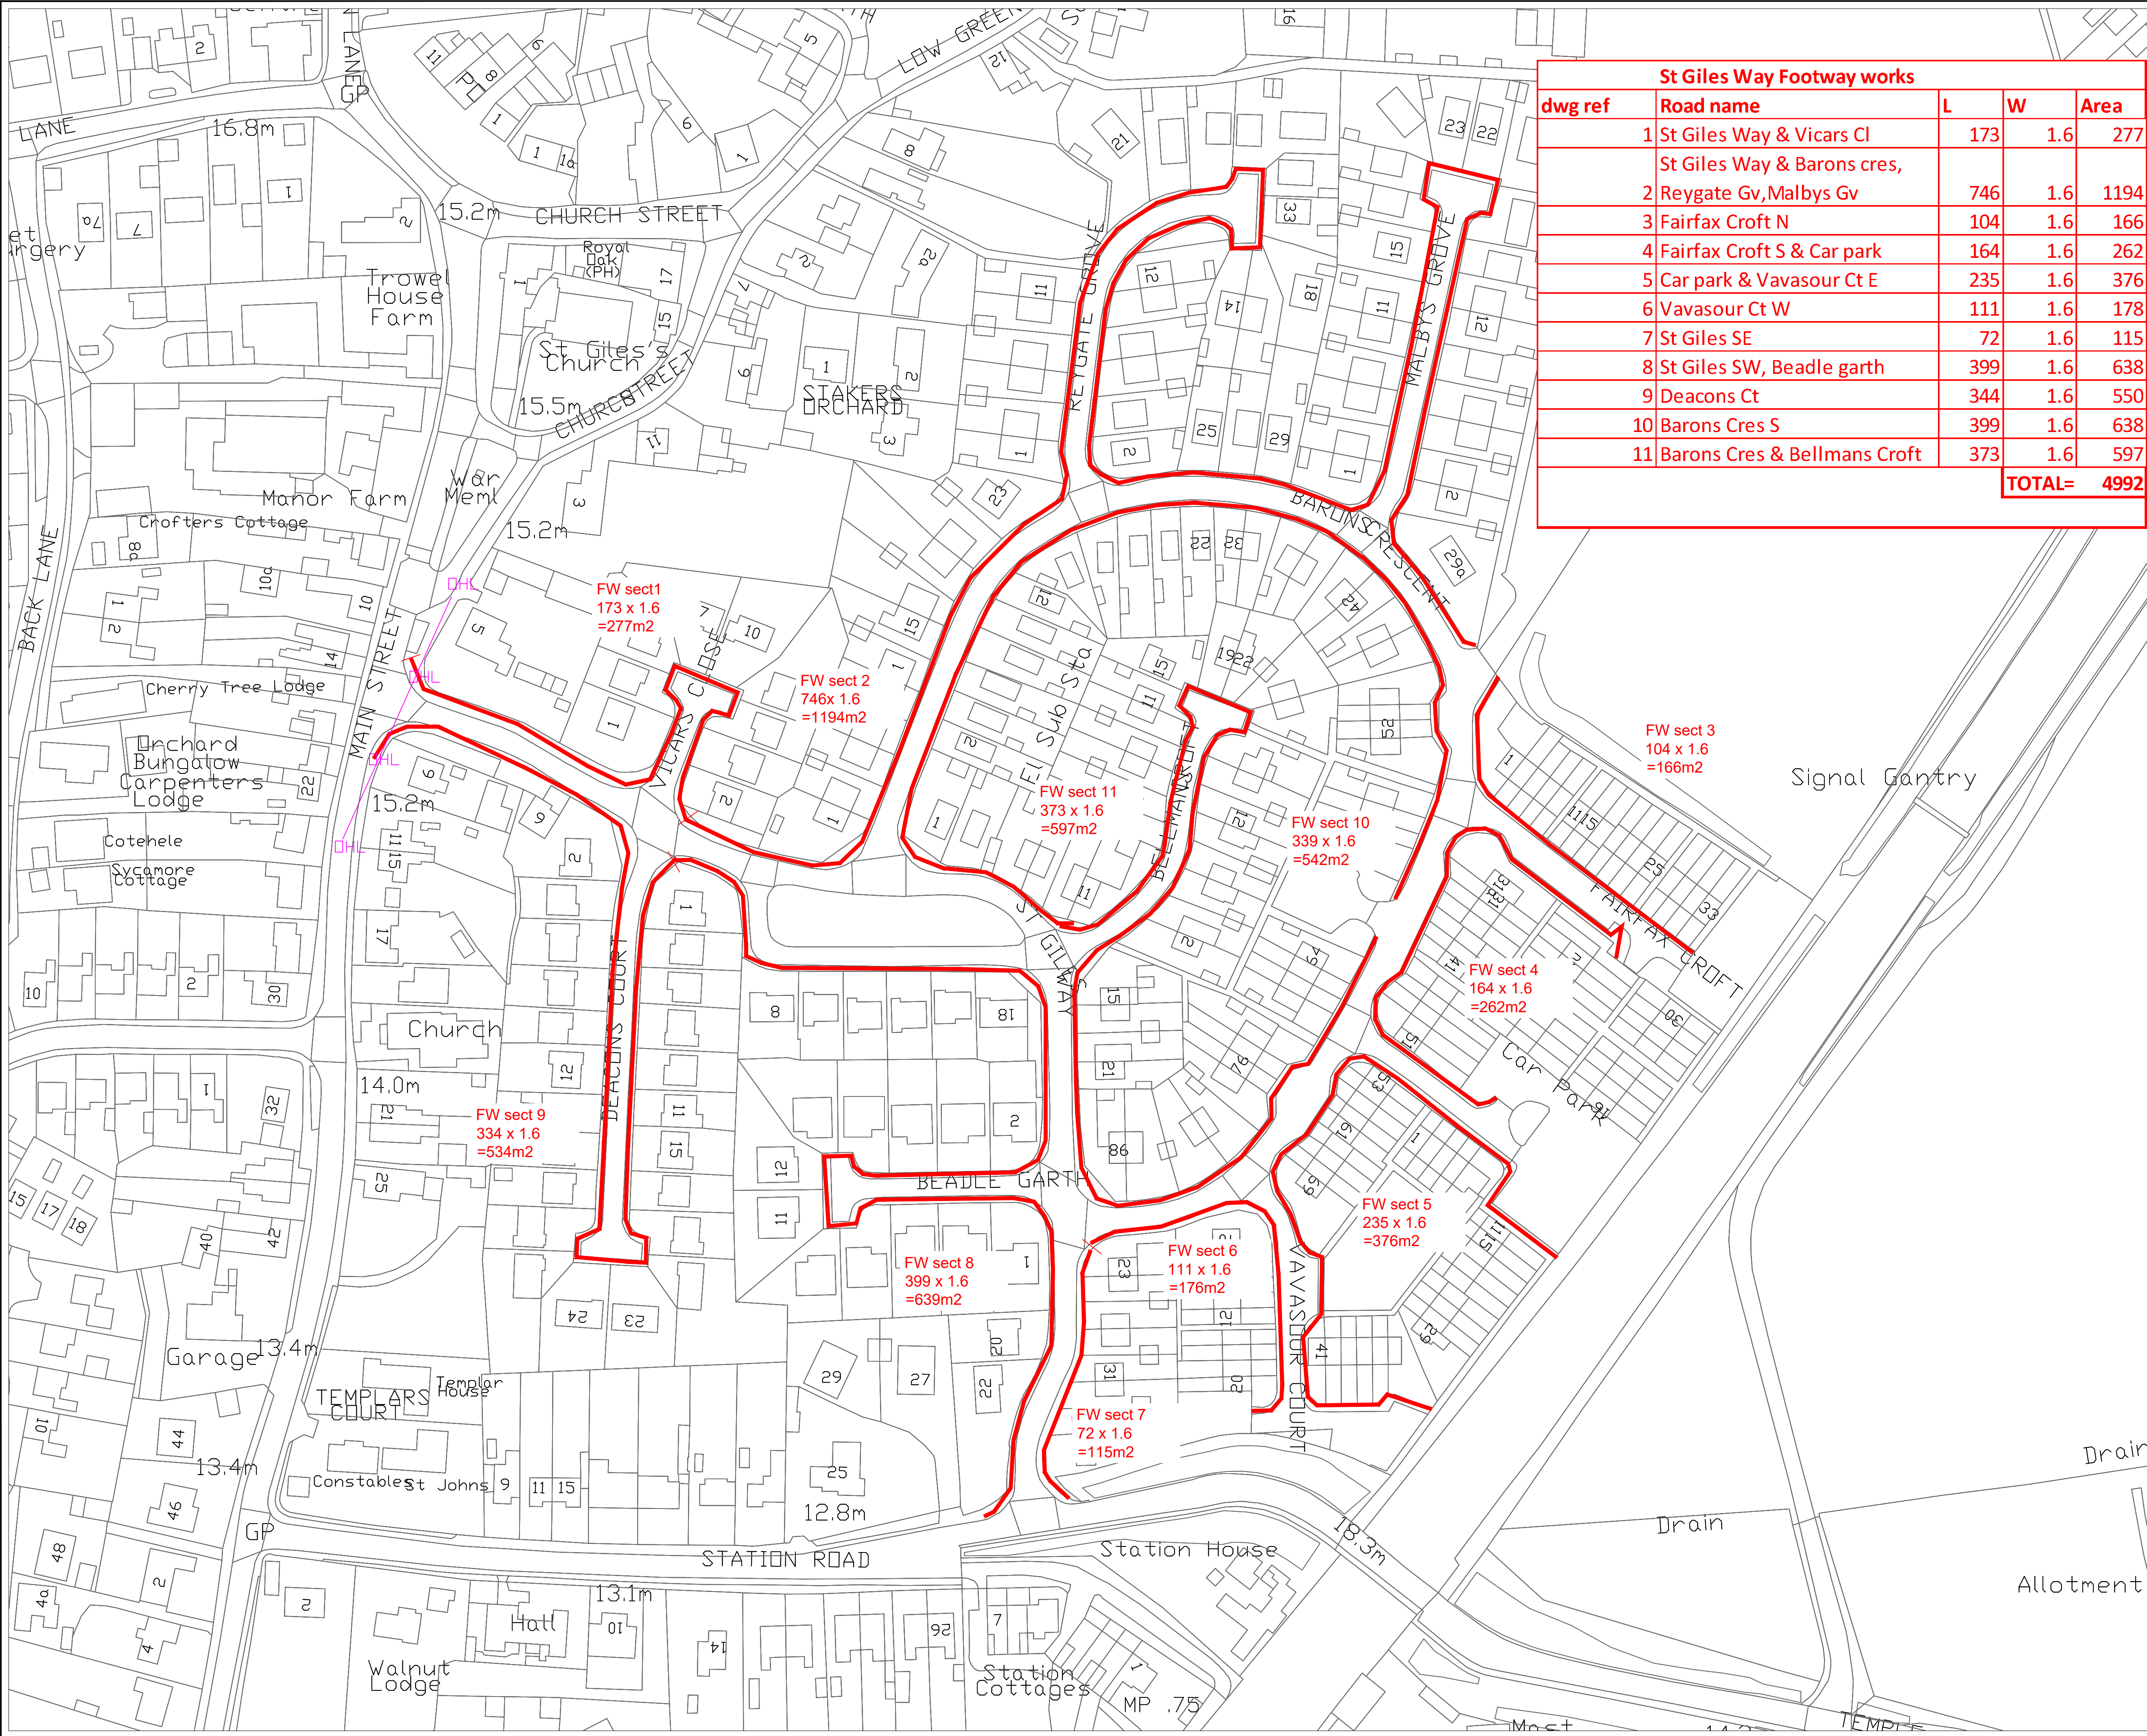

St Giles Way Footway works				
dwg ref	Road name	L	W	Area
1	St Giles Way & Vicars Cl	173	1.6	277
2	St Giles Way & Barons cres, Reygate Gv, Malbys Gv	746	1.6	1194
3	Fairfax Croft N	104	1.6	166
4	Fairfax Croft S & Car park	164	1.6	262
5	Car park & Vavasour Ct E	235	1.6	376
6	Vavasour Ct W	111	1.6	178
7	St Giles SE	72	1.6	115
8	St Giles SW, Beadle garth	399	1.6	638
9	Deacons Ct	344	1.6	550
10	Barons Cres S	399	1.6	638
11	Barons Cres & Bellmans Croft	373	1.6	597
TOTAL=				4992

- NOTES:
1. All dimensions in metres unless otherwise stated.
 2. Do not scale from this drawing.
 3. Any issues should be raised with the scheme engineer immediately.

HSE
Residential street
Overhead lines
Bus route
Works
Budgetted for
Slurry sealing- If decided to resurface in bitmac will need repricing

BASED UPON THE ORDNANCE SURVEY MAPING WITH THE PERMISSION OF THE CONTROLLER OF HER MAJESTY'S STATIONERY OFFICE. © CROWN COPYRIGHT. UNAUTHORISED REPRODUCTION INFRINGES CROWN COPYRIGHT AND MAY LEAD TO PROSECUTION OR CIVIL PROCEEDINGS. City of York Council OS Licence No. 1000 20818

REV1

A	XX	XX	XX	0X/17	Tender Issue
Revision	By	Checked	Approved	Date	Description



Highways – Transport Projects and Delivery Team
Eco Depot, Hazel Court, James Street, York, YO10 3DS
www.york.gov.uk

Project 2021-22 FOOTWAY
FOOTWAY RESURFACING
WORKS PLAN

Drawing ST GILES WAY & ROADS OFF
FOOTWAY SLURRY SEAL

Drawn by C. Sims Date: JUNE 20
Checked by A N OTHER Date: XXXXXX
Authorised by A N OTHER Date: XXXXXX

Drawing No. HMS21/..... Revision A

Drawing Scale: 1:1X1000 A1
CAD Filename: Computer Filename Plot Scale: 1:100

LTP FOOTWAYS

ITEM	20		
LOCATION	Area 3 FWSS TBD		
ROAD NO			
WARD/PARISH			
SCHEME DRAWING NO			
DESCRIPTION OF WORK	Kerb repairs and prepatching followed by footway slurry sealing- to resurface over older/ crumbly surface bitmac with solid lower layers		
SPECIFICATION RECOMMENDATION	Footway Slurry seal		
CW WIDTH		FW WIDTH	
CW LENGTH		FW LENGTH	
CW AREA		FW AREA	4000-4500m<sup>2</sup>
FEE			
TOTAL ESTIMATE	£25000		

NOTES	To be decided- a contiguous estate area or large area stretches of footway that are deteriorating / spalling on the surface course but not requiring a full rebuild. Small areas of puddles/ vehicle damage / potholes/ kerbing to be prepatched prior to FWSS works. Ironworks to be adjusted during works if required by levels.
-------	---

LTP FOOTWAYS

ITEM	21		
LOCATION	Area 4 FWSS TBD		
ROAD NO			
WARD/PARISH			
SCHEME DRAWING NO			
DESCRIPTION OF WORK	Kerb repairs and prepatching followed by footway slurry sealing- to resurface over older/ crumbly surface bitmac with solid lower layers		
SPECIFICATION RECOMMENDATION	Footway Slurry seal		
CW WIDTH		FW WIDTH	
CW LENGTH		FW LENGTH	
CW AREA		FW AREA	4000-4500m<sup>2</sup>
FEE			
TOTAL ESTIMATE	£25000		

NOTES	To be decided- a contiguous estate area or large area stretches of footway that are deteriorating / spalling on the surface course but not requiring a full rebuild. Small areas of puddles/ vehicle damage / potholes/ kerbing to be prepatched prior to FWSS works. Ironworks to be adjusted during works if required by levels.
-------	---