

PROGRAMME OF WORKS 2022 / 2023



FOOTWAY

RESURFACING AND RECONSTRUCTION

Highway Maintenance Services
Hazel Court
James Street
YORK
YO10 3DS

Jan 2022

LTP Footways

ITEM

1

LOCATION

Manor park Road - Part

ROAD NO

WARD/PARISH

Rawcliffe & Clifton without

SCHEME DRAWING NO

DESCRIPTION
OF WORK

Resurface sections 4,5,6= 350m2, additional 20%
surfacing to account for driveways-TOTAL = 410m2
2 pairs TACs to install? 20 new kerbs to set

*SPECIFICATION
RECOMMENDATION*

T 21

CW WIDTH

FW WIDTH

1.8

CW LENGTH

FW LENGTH

250

CW AREA

FW AREA

410


FEE

TOTAL ESTIMATE

£62730

NOTES

Residential
OH comms lines

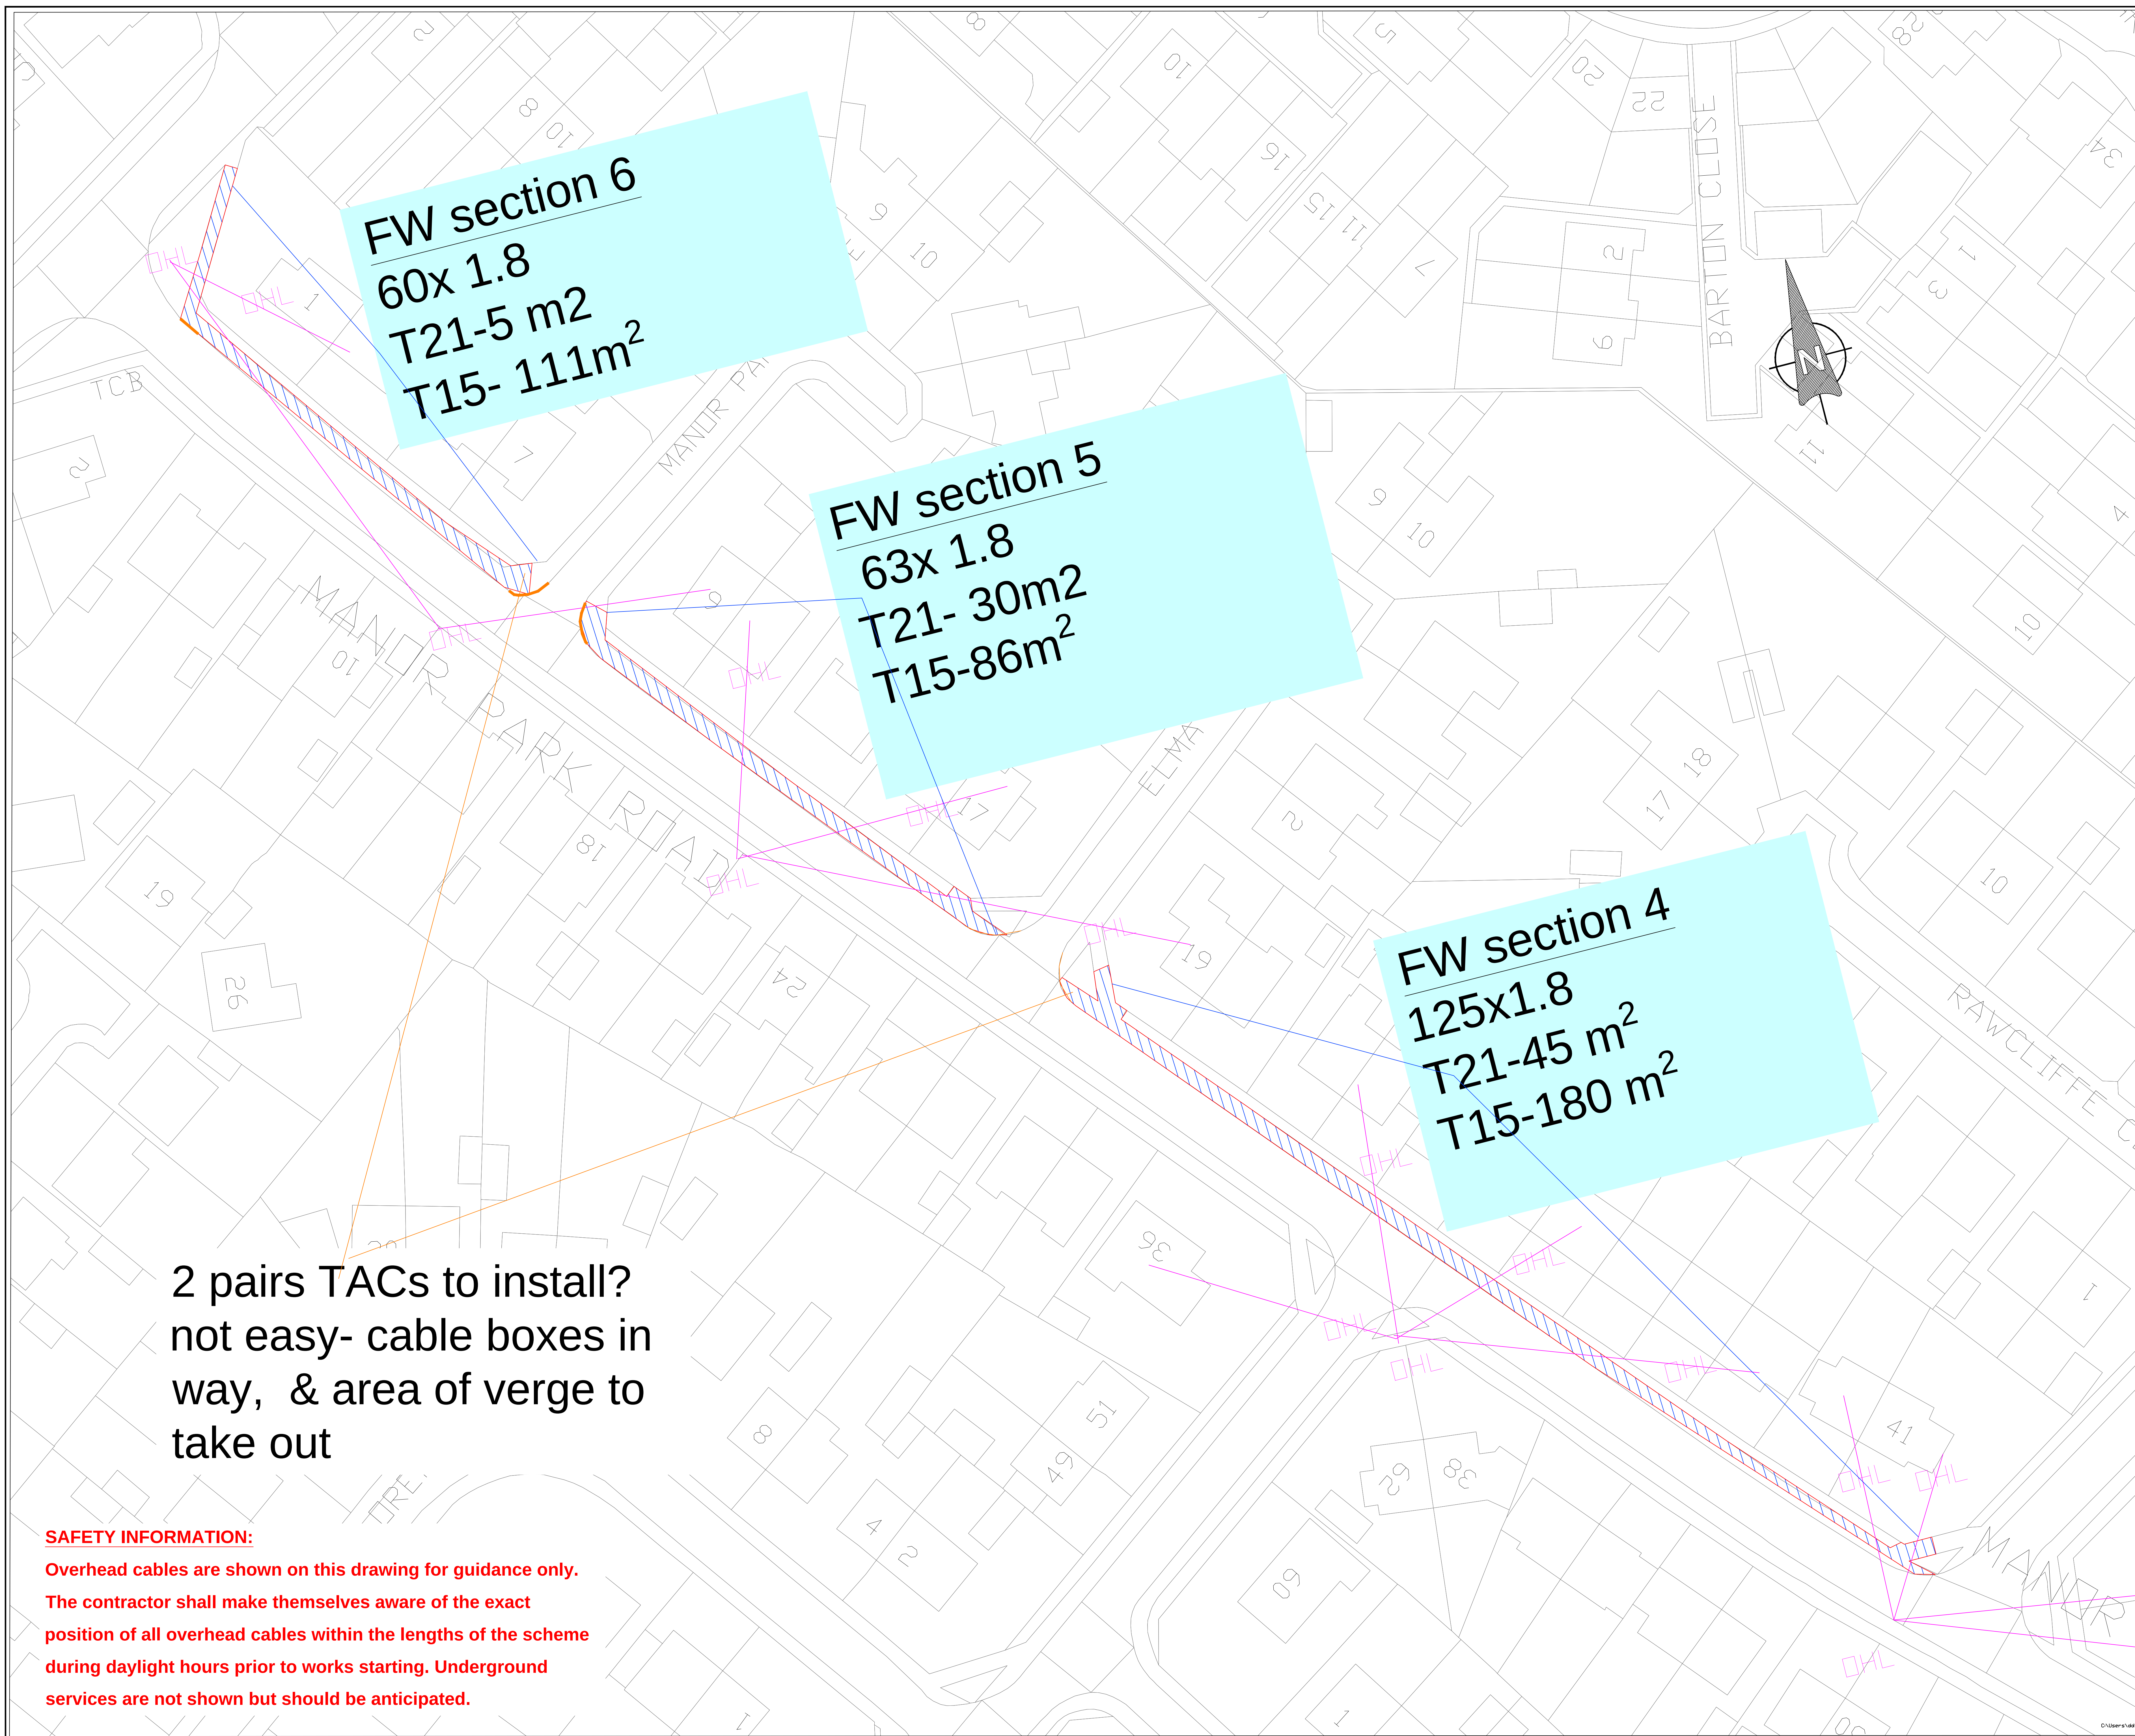

SAFETY INFORMATION:

Overhead cables are shown on this drawing for guidance only. The contractor shall make themselves aware of the exact position of all overhead cables within the lengths of the scheme during daylight hours prior to works starting. Underground services are not shown but should be anticipated.

☐

1. All dimensions in metres unless otherwise stated.
 2. Do not scale from this drawing.
 3. Any issues should be raised with the scheme engineer immediately.
- KEY:

KEY:

2022-23 - Resurface sections 4,5,6= 350 m², additional 20% surfacing to account for driveways
TOTAL = 410 m²
2 pairs TACs to install?
20 new kerbs to set

BASED UPON THE ORDANCE SURVEY MAPPING WITH THE
PERMISSION OF THE CONTROLLER OF HER MAJESTY'S STA
OFFICE © CROWN COPYRIGHT. UNAUTHORISED REPRODUC
INFRINGES CROWN COPYRIGHT AND MAY LEAD TO PROSEC
OR CIVIL PROCEEDINGS.
City of York Council OS Licence No. 1000 20818

DRAWING TYPE

Revision	By	Checked	Approved	Date	Description



Highways – Transport Projects and Delivery Team
Eco Depot, Hazel Court, James Street, York, YO10 3DS
www.york.gov.uk

Project
2022-23 Footways Programme
FOOTWAYS
LOCATION

Drawing

Proposed Programmes

Manor Park road

Rawcliffe & Clifton Without

Drawn by	CSS	Date: 03/10/2021
Checked by		Date:
Authorised by		Date:

Drawing No.	Revision
	A

Drawing Scale: NTS AO

CAD Filename: Plot Scale: NTS

LTP Footways

ITEM	2		
LOCATION	York Rd- Carr In – Severus ave		
ROAD NO			
WARD/PARISH	Acomb		
SCHEME DRAWING NO			
DESCRIPTION OF WORK	Footway patching and resurfacing, TAC replacement ,
bollard realignment		
<i>SPECIFICATION RECOMMENDATION</i>	T 15 resurfacing + patching
1pair TAC to replace
104m York stone kerbs to reset or replace- TBD
Bollards to be reset to vertical		
CW WIDTH		FW WIDTH	1.8
CW LENGTH		FW LENGTH	108
CW AREA		FW AREA	450
FEE			
TOTAL ESTIMATE	£ 64,107		
NOTES	Doctors surgery within site
Overhead lines , overhanging trees		

York Rd-Carr In to Severus Ave
450m2






HSE
Residential and business premises
Old Yorkstone kerbs in place- ++ care when handling- kerb lifter needed?
Overhanging trees
Overhead lines

NOTES:

1. All dimensions in metres unless otherwise stated.
2. Do not scale from this drawing.

KEY:


-  Area of footway T15 =450m2
-  Footway patching =110m2
-  Verge

 Kerbs to reset/ replace/ adjust =104m

BASED UPON THE ORDNANCE SURVEY MAPING WITH THE PERMISSION OF THE CONTROLLER OF HER MAJESTY'S STATIONARY OFFICE. © CROWN COPYRIGHT. UNAUTHORISED REPRODUCTION INFRINGES CROWN COPYRIGHT AND MAY LEAD TO PROSECUTION OR CIVIL PROCEEDINGS. City of York Council OS Licence No. 1000 20818

LOCATION

Revision	By	Checked	Approved	Date	Description

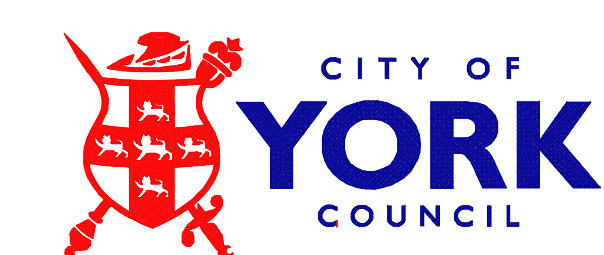

Highways - Transport Projects and Delivery Team
Eco Depot, Hazel Court, James Street, York, YO10 3DS
www.york.gov.uk

Project
2022-23 FOOTWAYS WORKS
York Rd Acomb
2 Carr lane to Severus Ave

Drawing
Proposed Programmes
York Rd Acomb
ACOMB

Drawn by	CSS	Date:	03/09/2020
Checked by		Date:	
Authorised by		Date:	

Drawing No.		Revision	A
Drawing Scale:	NTS	AO	
CAD Filename:		Plot Scale:	nts

YORK RD ACOMB Carr In - Severus Ave	
A-	Rebuild TAC both sides to current std
B	York stone kerbs - to be left in situ? Repair /reset to level ~104m
C	Reset Cast iron bollards to vertical
D	110 m2 patching- patches includes 5m2 for around TACs
E	445m2 T15 resurfacing

LTP Footways

ITEM	3		
LOCATION	Acacia ave		
ROAD NO			
WARD/PARISH	Huntington & New Earswick		
SCHEME DRAWING NO			
DESCRIPTION OF WORK	Footway paving		
<i>SPECIFICATION RECOMMENDATION</i>	Footway paving
1pair TAC to replace
167m kerbing to replace		
CW WIDTH		FW WIDTH	2
CW LENGTH		FW LENGTH	88
CW AREA		FW AREA	283
FEE			
TOTAL ESTIMATE	£49,980		
NOTES	Elderly residents
residential site		

Acacia Avenue

SYCAMORE PLACE

ACACIA AVENUE

WILLOW BANK

77

91


801

- NOTES:
1. All dimensions in metres unless otherwise stated.
 2. Do not scale from this drawing.
- KEY:

 Location of Works 283m2

Pick up and relay existing flags, replace any broken flags
Relay existing tactile jnc with willows bank.

1 tactile crossing to renew at sycamore place plus 3 kerbs to replace

 Tactiles

 Grass Verge

 167m of new pin kerbs to lay

BASIS UPON THE ORDNANCE SURVEY MAPPING WITH THE PERMISSION OF THE CONTROLLER OF HER MAJESTY'S STATIONERY OFFICE. © CROWN COPYRIGHT. UNAUTHORISED REPRODUCTION INFRINGES CROWN COPYRIGHT AND MAY LEAD TO PROSECUTION OR CIVIL PROCEEDINGS.
City of York Council OS Licence No. 1000 20818

DWG_TYPE

A	XX	XX	XX	0X/17	Tender Issue	
Revision	By	Checked	Approved	Date	Description	



Highways – Transport Projects and Delivery Team
Eco Depot, Hazel Court, James Street, York, YO10 3DS
www.york.gov.uk

Project
22-23 Footway
Resurfacing
extents

Drawing
Acacia Avenue
Huntingto & New Earswick Ward
Acacia Avenue paving footway

Drawn by	K.K	Date:	3/11/21
Checked by	CHECKED	Date:	DATE2
Authorised by	AUTHORISED	Date:	DATE3

Drawing No.	Revision
DWG_NO	A

Drawing Scale:	NTS	A1
----------------	-----	----

CAD Filename:Computer Filename Plot Scale: 1:100

LTP Footways

ITEM	4		
LOCATION	Marygate		
ROAD NO			
WARD/PARISH	Bootham		
SCHEME DRAWING NO			
DESCRIPTION OF WORK	Footway conservation paving		
<i>SPECIFICATION RECOMMENDATION</i>	Blue brick Channel blocks in site. ++BT and fibre stats in street Possible cobbles beneath existing Conservation paving to match existing & kerbs		
CW WIDTH		FW WIDTH	1.1-2.3
CW LENGTH		FW LENGTH	325
CW AREA		FW AREA	591
FEE			
TOTAL ESTIMATE	£ 176,444		

NOTES	Existing, RW= 3.7m narrowest point-Closure needed probably
Access rd for a Main City Car park, Residents parking area
River Ouse next to site -flooding possible
Conservation / Historical area next to museum
-------	---



Area 1=316m²
Conservation paving & kerbs

Area 2=132m²
Conservation paving & kerbs

Area 4=28m²
Conservation paving & kerbs

Area 3=115m²
T21 & Conservation paving & kerbs

- NOTES:**
- Mary Gate
 - Existing- , RW= 3.7m narrowest point
 - Closure needed probably
 - Blue brick Channel blocks in site
 - ++BT and fibre stats in street
 - Possible cobbles beneath existing
 - Gullies to be cleaned and checked
 - Footway Paving Marygate
 - site 1 =316m²
 - site 2 = 132m²
 - site 3=115m²
 - site 4=28m²
 - TOTAL AREA= 591m²
 - H&S
 - Access rd for a Main City Car park, Residents parking area
 - River Ouse next to site- flooding possible
 - Conservation / Historical area next to museum-

BASED UPON THE ORDNANCE SURVEY MAPPING WITH THE PERMISSION OF THE CONTROLLER OF HER MAJESTY'S STATIONERY OFFICE. A CROWN COPYRIGHT. UNAUTHORISED REPRODUCTION OF THIS DOCUMENT IS PROHIBITED AND MAY LEAD TO PROSECUTION OR CIVIL PROCEEDINGS. City of York Council OS Licence No. 1000 20818

DRAWING TYPE

Revision	By	Checked	Approved	Date	Description



Highways – Transport Projects and Delivery Team
Eco Depot, Hazel Court, James Street, York, YO10 3DS
www.york.gov.uk

Project
2021/22 Footway Schemes

Drawing
2021 Footways
Marygate-FOOTWAYS
Bootham

Drawn by CSS Date: 17/08/2019
Checked by Date:
Authorised by Date:

Drawing No. Revision
A

Drawing Scale: 1:500 AO

CAD Filename: Plot Scale:20000

LTP Footways

ITEM	5		
LOCATION	Lendal		
ROAD NO			
WARD/PARISH	Guildhall		
SCHEME DRAWING NO			
DESCRIPTION OF WORK	Footway conservation paving & kerbing		
<i>SPECIFICATION RECOMMENDATION</i>	Conservation paving & kerb replacement to match existing		
CW WIDTH		FW WIDTH	1.4-8
CW LENGTH		FW LENGTH	117
CW AREA		FW AREA	275
FEE			
TOTAL ESTIMATE	£ 22500		
NOTES	Shop frontages on site
Multiple ironworks & cross path metal gutter gullies
Pub ent
Busy pedestrian traffic at all times		

NOTES:

2021-22 Potential Highways Works sites

LENDAL
JUDGES LODGINGS
SIDE

Conservation paving& kerbing

HSE

Shop frontages on site

Multiple ironworks &


cross path metal gutte

gullies within site

Pub ent


Busy pedestrian traffic

at all times

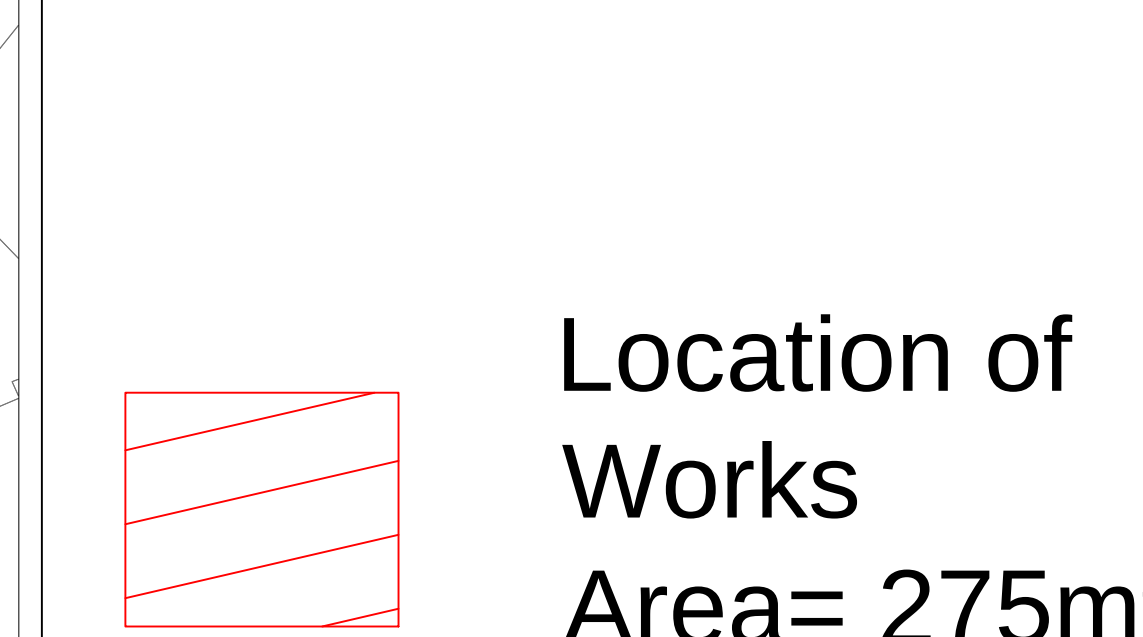

BASED UPON THE ORDNANCE SURVEY MAPPING WITH THE
PERMISSION OF THE CONTROLLER OF HER MAJESTY'S STATIONERY
OFFICE © CROWN COPYRIGHT. UNAUTHORISED REPRODUCTION
INFRINGEMENTS CROWN COPYRIGHT AND MAY LEAD TO PROSECUTION
OR CIVIL PROCEEDINGS.
City of York Council OS Licence No. 1000 20818

DRAWING TYPE					
Revision	By	Checked	Approved	Date	Description

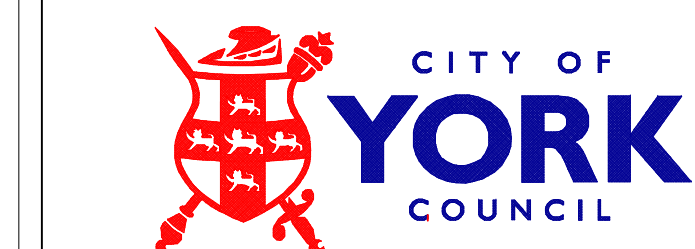

Highways – Transport Projects and Delivery Team
Eco Depot, Hazel Court, James Street, York, YO10 3DS
www.york.gov.uk

Project
2021-22 Highways Programme
Footways
Location & Works Plan

Drawing

LENDAL
JUDGES LODGINGS SIDE
GUILDHALL

Drawn by	CSS	Date:	03/09/20
Checked by		Date:	
Authorised by		Date:	


Drawing No.	Revision
	A

Drawing Scale: NTS AO

CAD Filename: Plot Scale: NTS

LTP Footways

ITEM	6		
LOCATION	Coppergate from 3 Tuns to Low Ousegate		
ROAD NO			
WARD/PARISH	Guildhall		
SCHEME DRAWING NO			
DESCRIPTION OF WORK	Footway conservation paving & kerbing		
<i>SPECIFICATION RECOMMENDATION</i>	Conservation paving & kerb replacement to match existing		
CW WIDTH		FW WIDTH	1.4-8
CW LENGTH		FW LENGTH	90
CW AREA		FW AREA	148
FEE			
TOTAL ESTIMATE	£31,000		
NOTES	Shop frontages on site
Multiple ironworks & cross path metal gutter gullies
Pub ent
Busy pedestrian traffic at all times		

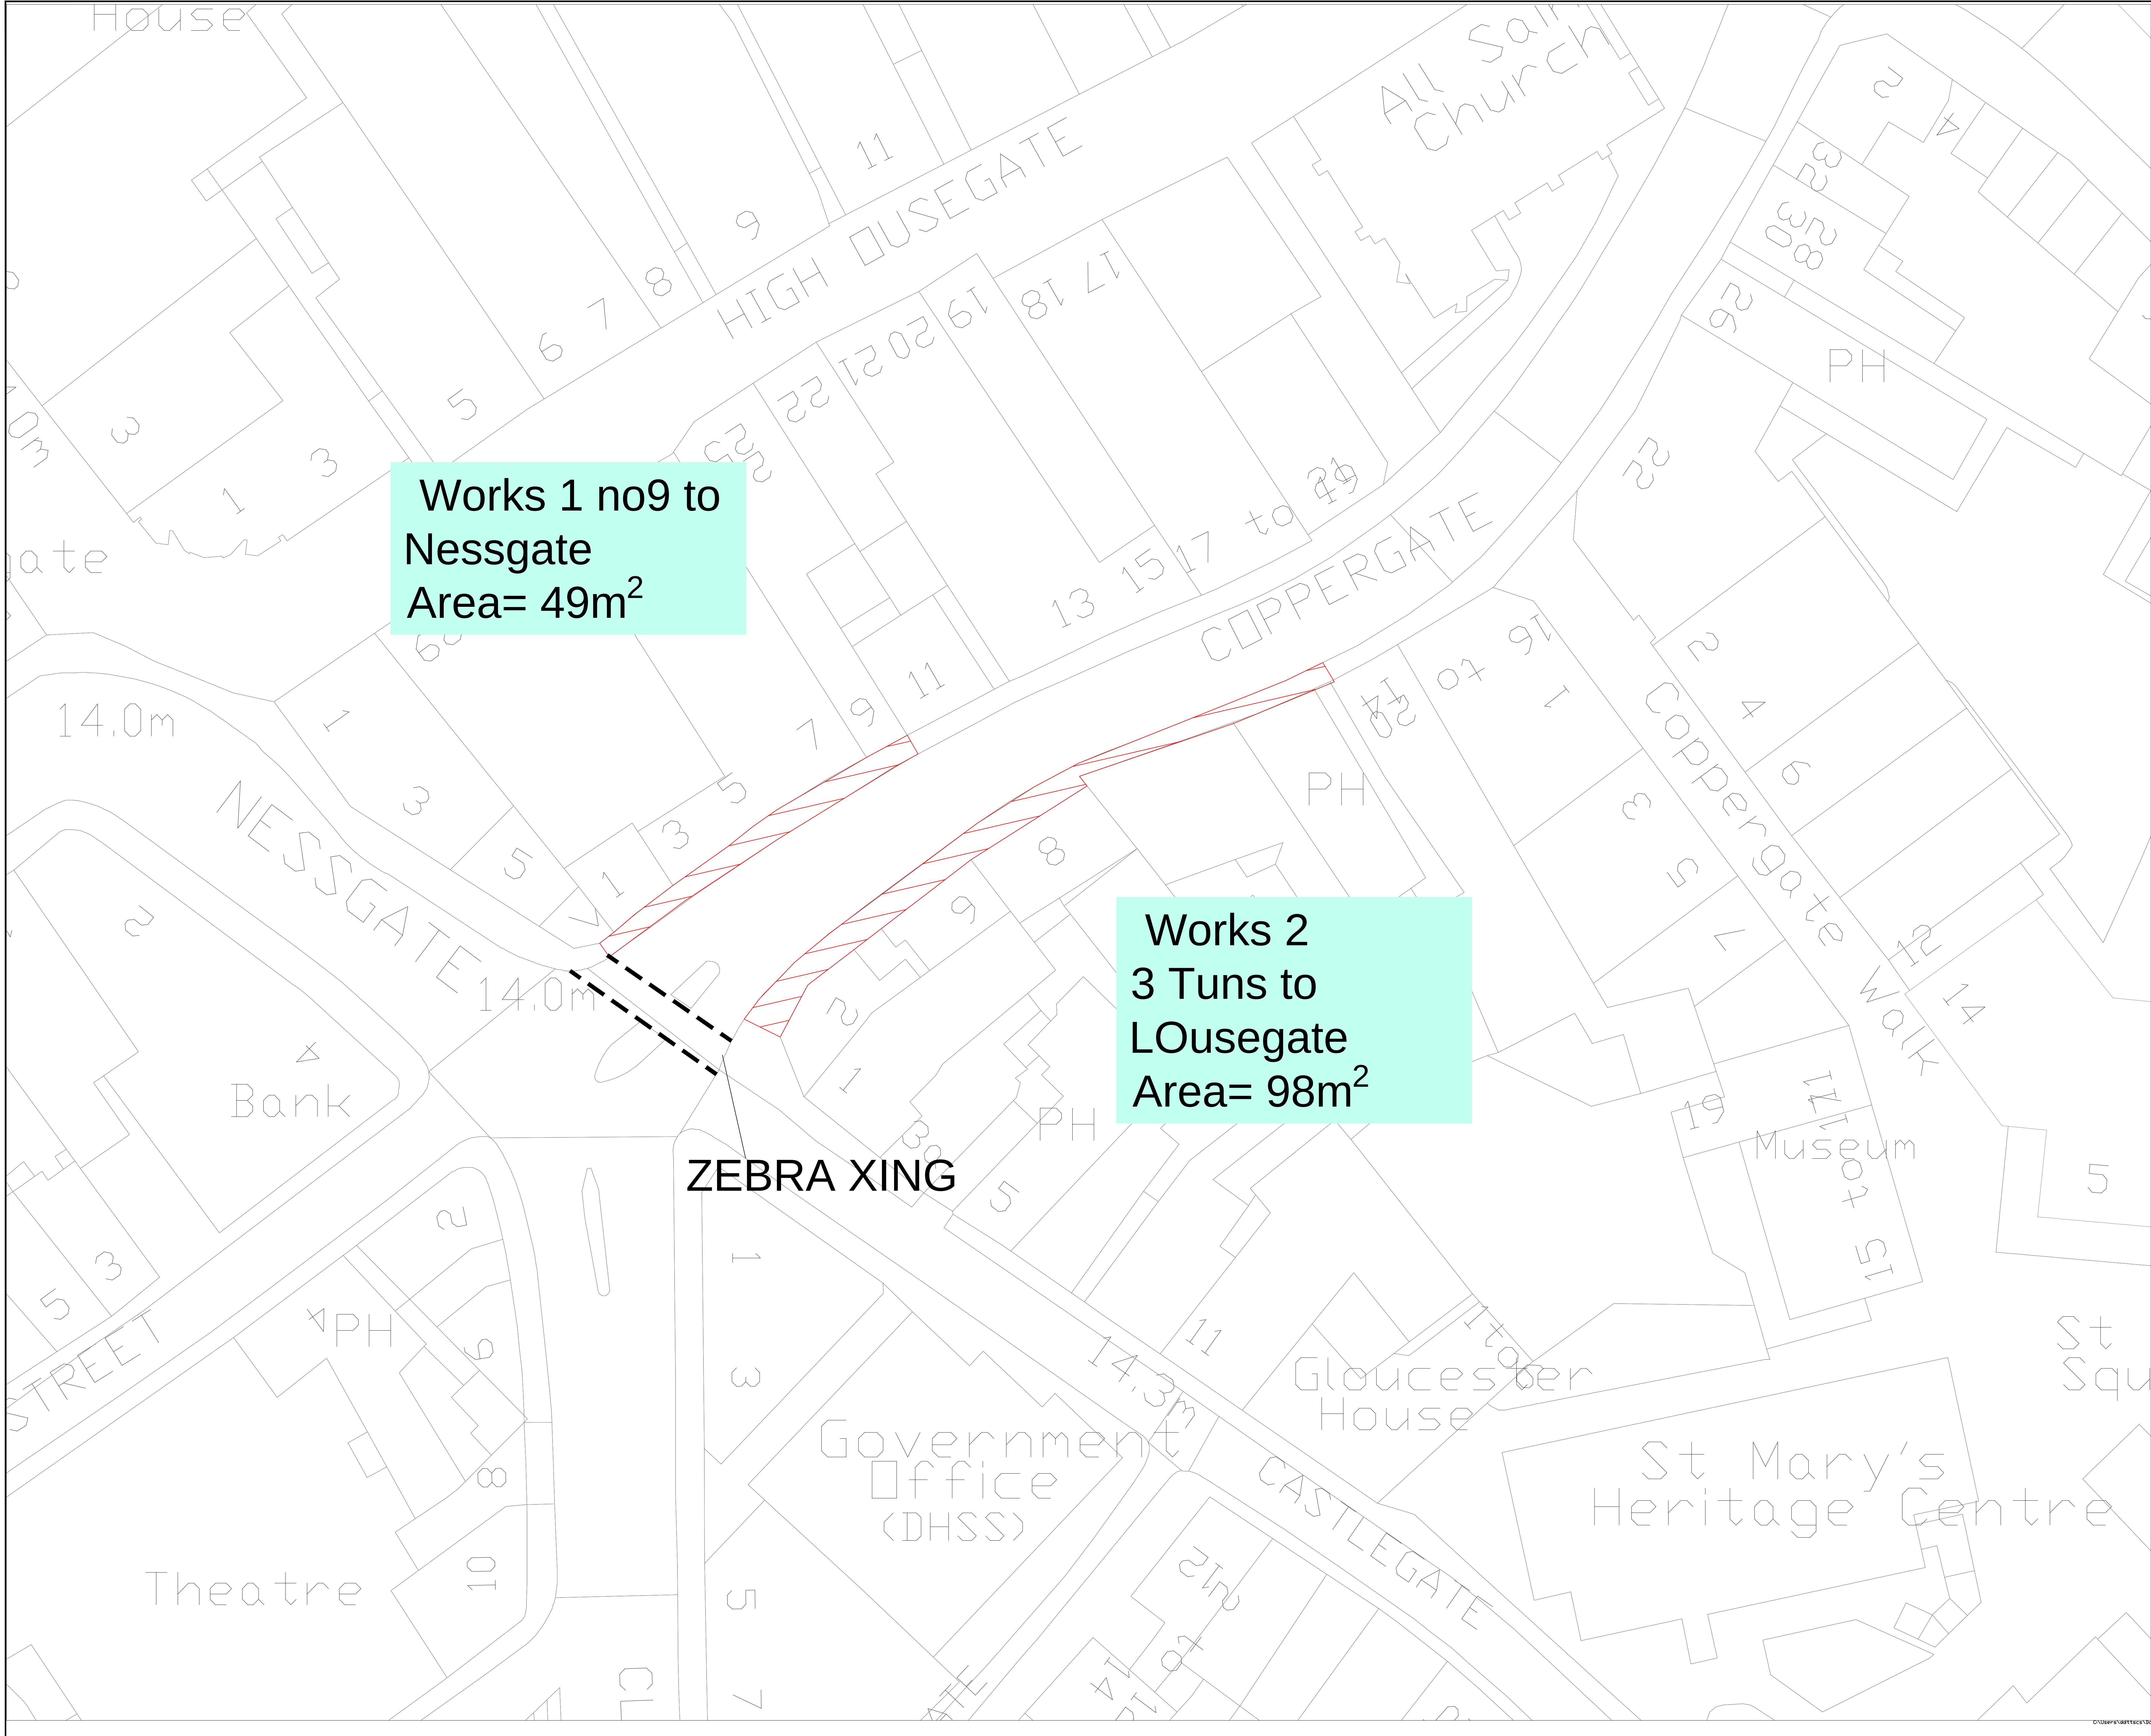

2021-22 Potential Highways Works sites

COPPERGATE

3 Tuns to Low Ousegate & NO 9 to low Ousegate

Conservation paving& kerbing


HSE

Shop frontages on site

Multiple ironworks & cross path metal gutter gullies within site

Pub ent

Busy pedestrian traffic at all times

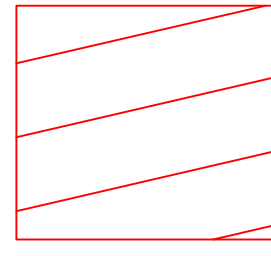 **Location of Works Total Area= 148m²**

BASED UPON THE ORDINANCE SURVEY MAPING WITH THE PERMISSION OF THE CONTROLLER OF HER MAJESTY'S STATIONERY OFFICE. © CROWN COPYRIGHT. UNAUTHORISED REPRODUCTION INFRINGES CROWN COPYRIGHT AND MAY LEAD TO PROSECUTION OR CIVIL PROCEEDINGS. City of York Council OS Licence No. 1000 20818

DRAWING TYPE

Revision	By	Checked	Approved	Date	Description




Project
2021-22 Highways Programme
Footways
Location & Works Plan

Drawing
COPPERGATE- 3 Tuns- L Ousegate & no 9 to Nessgate
GUILDHALL

Drawn by	CSS	Date:	03/09/2020
Checked by		Date:	
Authorised by		Date:	
Drawing No.		Revision	A
Drawing Scale:	NTS		A0
CAD Filename:		Plot Scale:	NTS

LTP Footways

ITEM	7		
LOCATION	Blake Street		
ROAD NO			
WARD/PARISH	Guildhall		
SCHEME DRAWING NO			
DESCRIPTION OF WORK	Footway conservation paving & kerbing		
<i>SPECIFICATION RECOMMENDATION</i>	Conservation paving & kerb replacement to match existing		
CW WIDTH		FW WIDTH	1.4-2.2
CW LENGTH		FW LENGTH	107
CW AREA		FW AREA	179
FEE			
TOTAL ESTIMATE	£7000		
NOTES	Shop frontages on site
Multiple ironworks & cross path metal gutter gullies
Busy pedestrian traffic at all times		

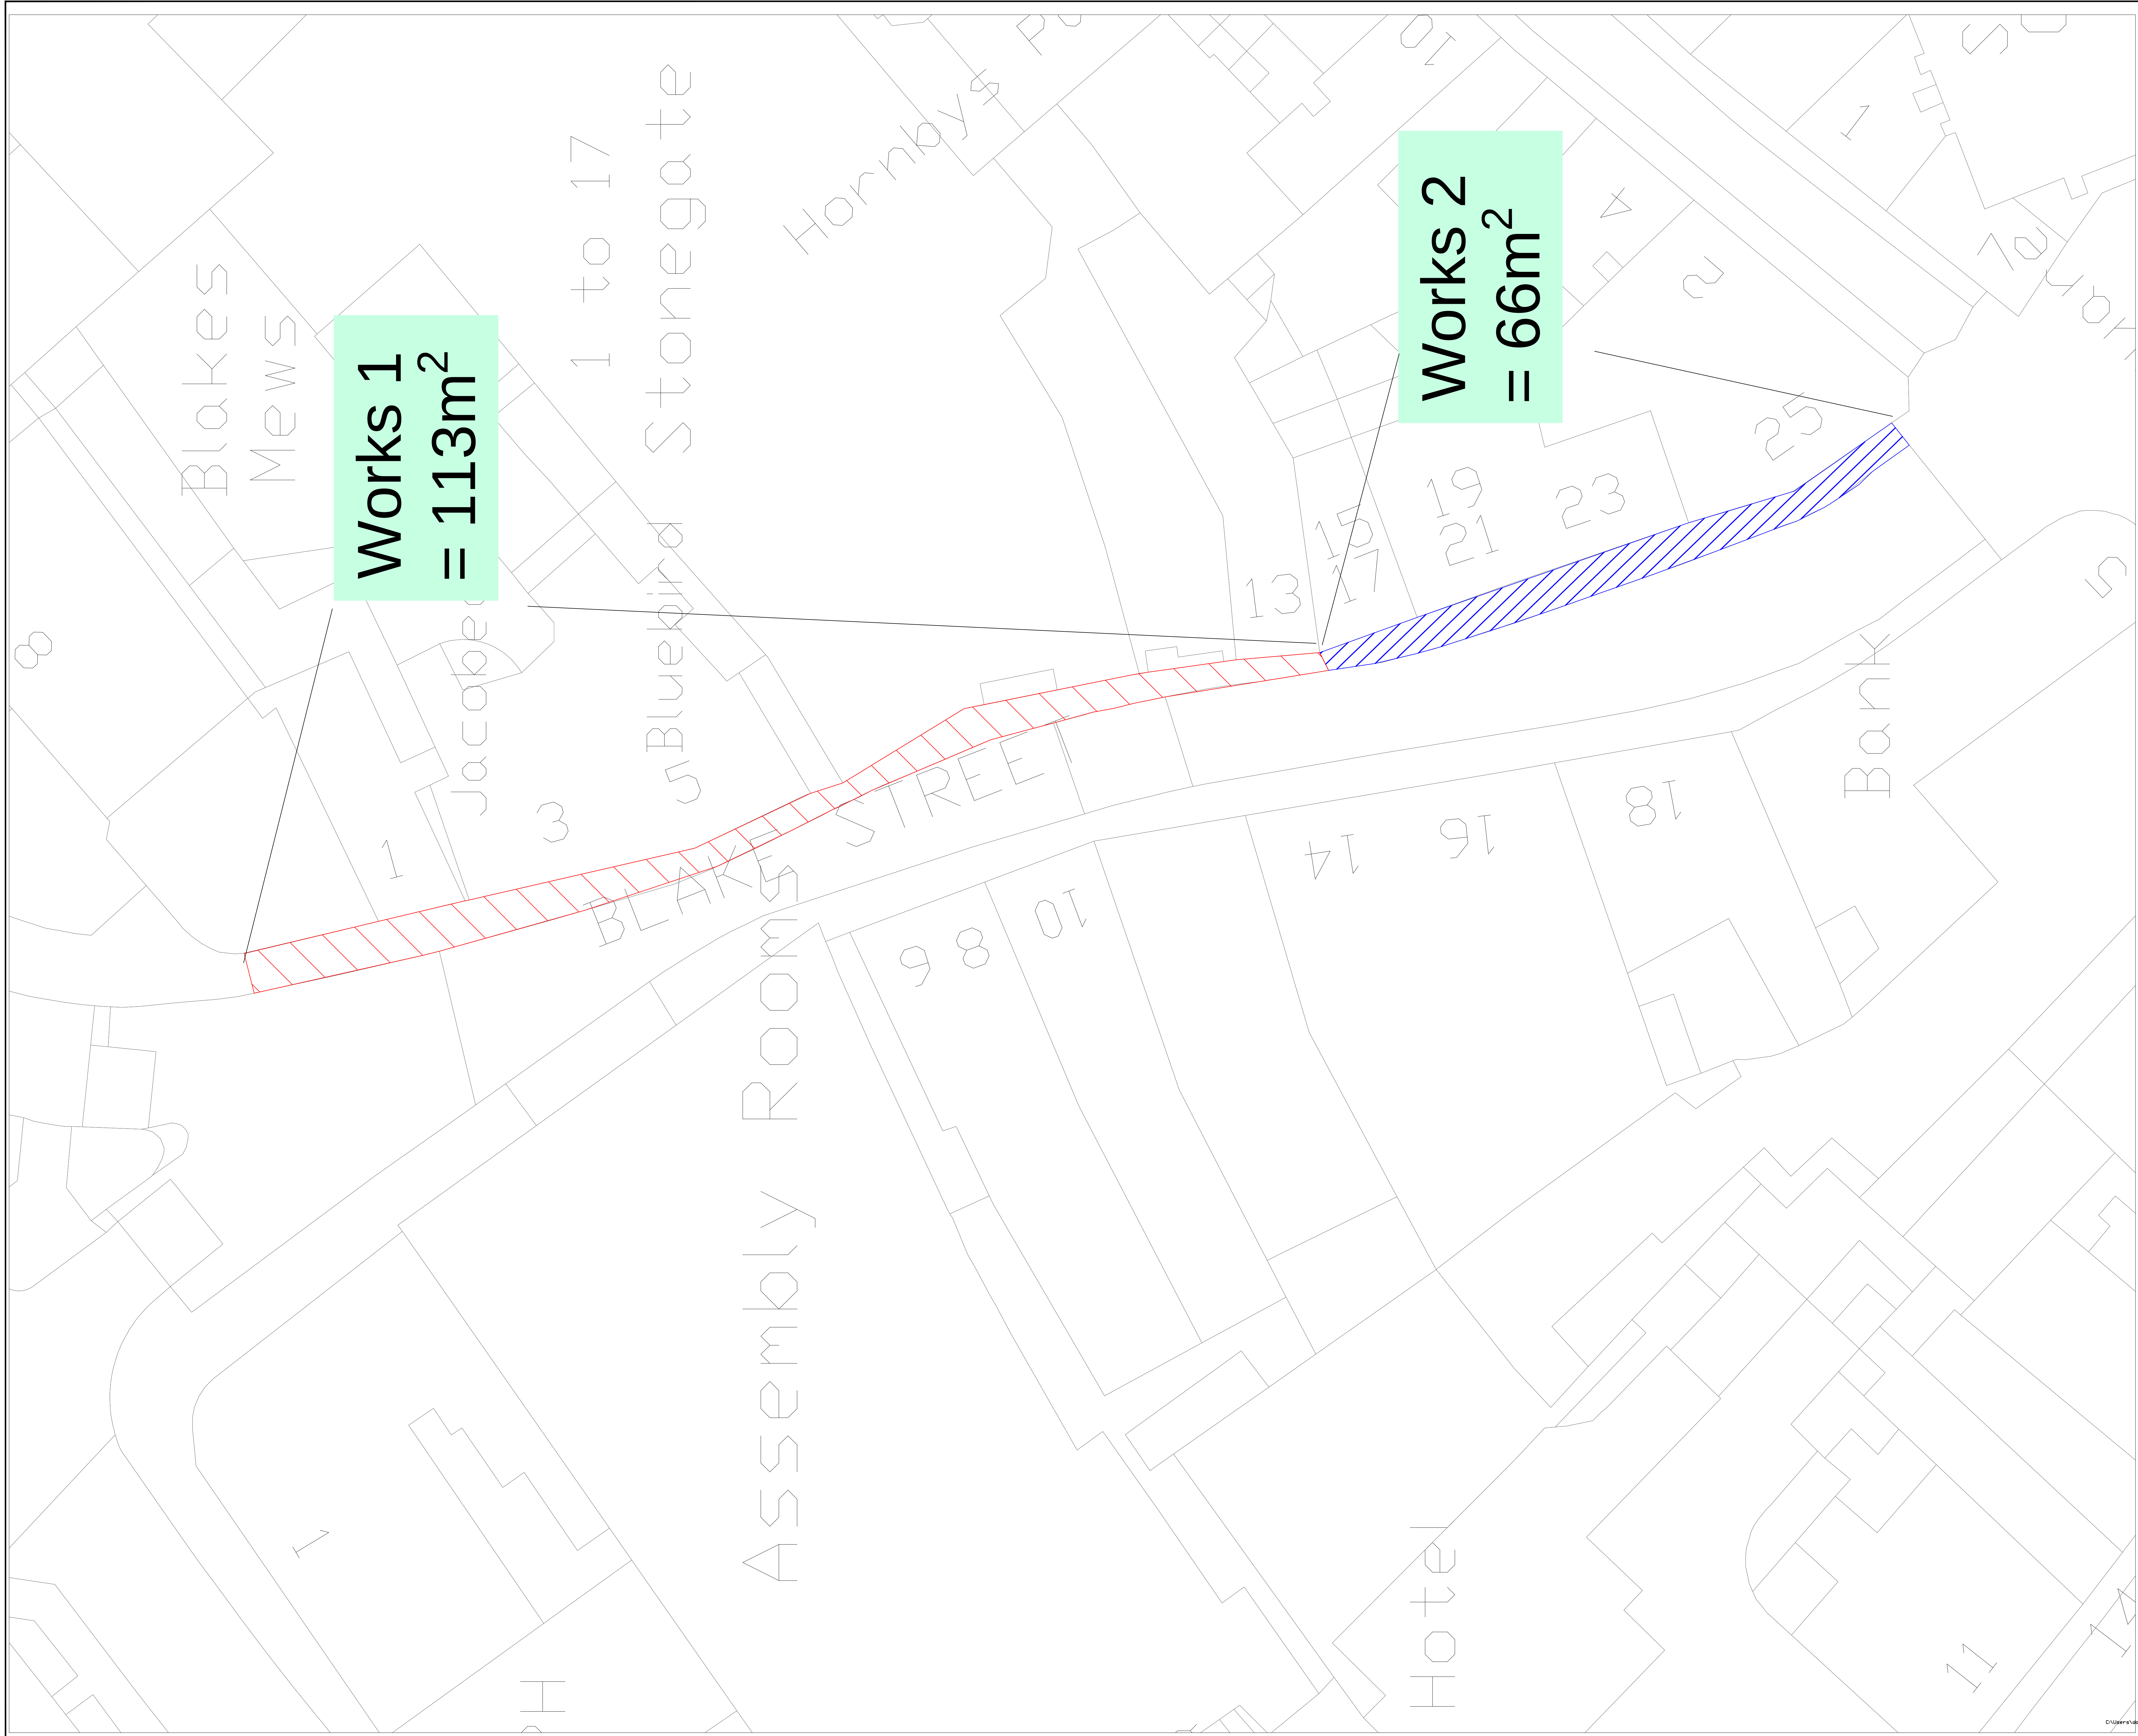

NOTES:

2021-22 Potential
Highways Works sites

BLAKE ST-
Conservation paving&
kerbing

HSE
Shop frontages on site
Multiple ironworks &
cross path metal gutter
gullies within site
Busy pedestrian traffic
at all times


Location of
Works 1- no 1-
17
Total Area =
113m²

Location of Works
2- no17- 25
Total Area 2=
66m²

BASED UPON THE ORDNANCE SURVEY MAPPING WITH THE
PERMISSION OF THE CONTROLLER OF HER MAJESTY'S STATIONERY
OFFICE. © CROWN COPYRIGHT. UNAUTHORISED REPRODUCTION
INFRINGES CROWN COPYRIGHT AND MAY LEAD TO PROSECUTION
OR CIVIL PROCEEDINGS.
City of York Council OS Licence No. 1000 20818

DRAWING TYPE

Revision	By	Checked	Approved	Date	Description

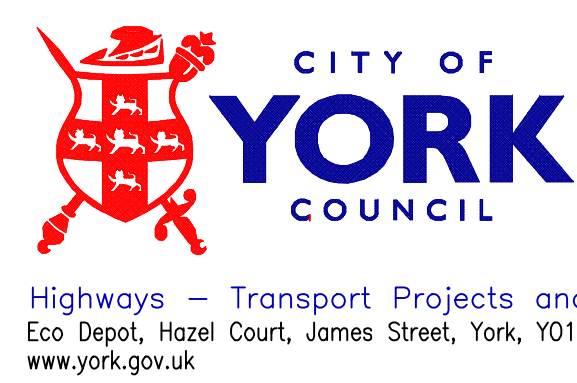

Project
2021-22 Highways programme
FOOTWAYS
LOCATION & WORKS

Drawing
Proposed Programmes
BLAKE ST- 1 & 2
GUILDHALL

Drawn by CSS Date: 03/04/2019
Checked by Date:
Authorised by Date:

Drawing No. Revision
A

Drawing Scale: 1:20000 AO

CAD Filename: Plot Scale:20000

LTP Footways

ITEM	8		
LOCATION	Beckfield Lane from Boroughbridge Road to Norman Drive		
ROAD NO			
WARD/PARISH	Acomb		
SCHEME DRAWING NO			
DESCRIPTION OF WORK	Footway resurfacing		
SPECIFICATION RECOMMENDATION	resurfacing & kerb replacement to match existing. T21 where required, Type 15 in less damaged areas.		
CW WIDTH		FW WIDTH	2.7
CW LENGTH		FW LENGTH	350
CW AREA		FW AREA	941
FEE			
TOTAL ESTIMATE	£88,000		
NOTES	Busy through route at peak times.
Residential street
Overhanging trees
Overhead lines
Bus route		

NOTES:

1. All dimensions in metres unless otherwise stated.
2. Do not scale from this drawing.
3. Any issues should be raised with the scheme engineer immediately.

HSE

Busy through route at peak times.

Residential street

Overhanging trees


Overhead lines

Bus route

BASED UPON THE ORDNANCE SURVEY MAPPING WITH THE
PERMISSION OF THE CONTROLLER OF HER MAJESTY'S STATIONER
OFFICE © CROWN COPYRIGHT. UNAUTHORISED REPRODUCTION
INFRINGES CROWN COPYRIGHT AND MAY LEAD TO PROSECUTION
OR CML PROCEEDINGS.
City of York Council OS Licence No. 1000 20818

DRAWING TYPE

Revision	By	Checked	Approved	Date	Description

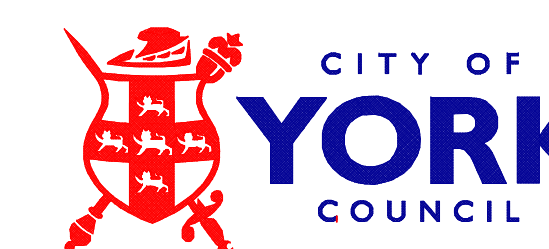

Highways – Transport Projects and Delivery Team
Eco Depot, Hazel Court, James Street, York, YO10 3DS
www.york.gov.uk

Project
2021-2 Resurfacing Programme
FOOTWAYS
Beckfield Lane

Drawing

Proposed Programmes
Boroughbridge rd - Norman dve
ACOMB

Drawn by CSS Date: 03/04/2020

Checked by _____ Date: _____

Authorised by _____ Date: _____

Drawing No.	Revision
-------------	----------

Drawing No.	REVISION
	A

Drawing Scale: NTS AO

Brewing Co.	NTS	YTS
1915-1916	1915-1916	1915-1916


C:\Users\adittscs\Documents\2021-22 Highways programme\HWSS for proposed 21-22 programme\F00TWAYS\JR area 2 FW Beckfield lane-v1.dwg

LTP Footways

ITEM	9		
LOCATION	Hamilton Drive- School- Holly Bank		
ROAD NO			
WARD/PARISH	Holgate		
SCHEME DRAWING NO			
DESCRIPTION OF WORK	732 m2 Footway resurfacing. Currently paving, tree root damaged.
South side=188x 1.8=338m2
North side= 133 x 2=266m2		
SPECIFICATION RECOMMENDATION	20% Additional surfacing required for vehicle crossings
Prcecast concrete paving or T21 resurfacing		
CW WIDTH		FW WIDTH	1.9
CW LENGTH		FW LENGTH	321
CW AREA		FW AREA	732
FEE			
TOTAL ESTIMATE	£50,000		
NOTES	School, watercourse within site. Overhanging trees.
Overhead cables		

LTP Footways

ITEM	10		
LOCATION	Hamilton Dr-Beech Avenue to New Lane (even Side)		
ROAD NO			
WARD/PARISH	Holgate		
SCHEME DRAWING NO			
DESCRIPTION OF WORK	Footway repaving- 300m2. 1pair of TACs to reconstruct.
Concrete driveways to recon if required by condition and or levels		
SPECIFICATION RECOMMENDATION	Repaving & kerb replacement to match existing.
Concrete driveway crossings to reconstruct- approx. 155m2		
CW WIDTH		FW WIDTH	1.9
CW LENGTH		FW LENGTH	142
CW AREA		FW AREA	270
FEE			
TOTAL ESTIMATE	£76,500		
NOTES	School close to site
Overhanging trees
Watercourse close to site
Overhead lines
Awkward junctions opposite site
Overhead lines
Bus route		

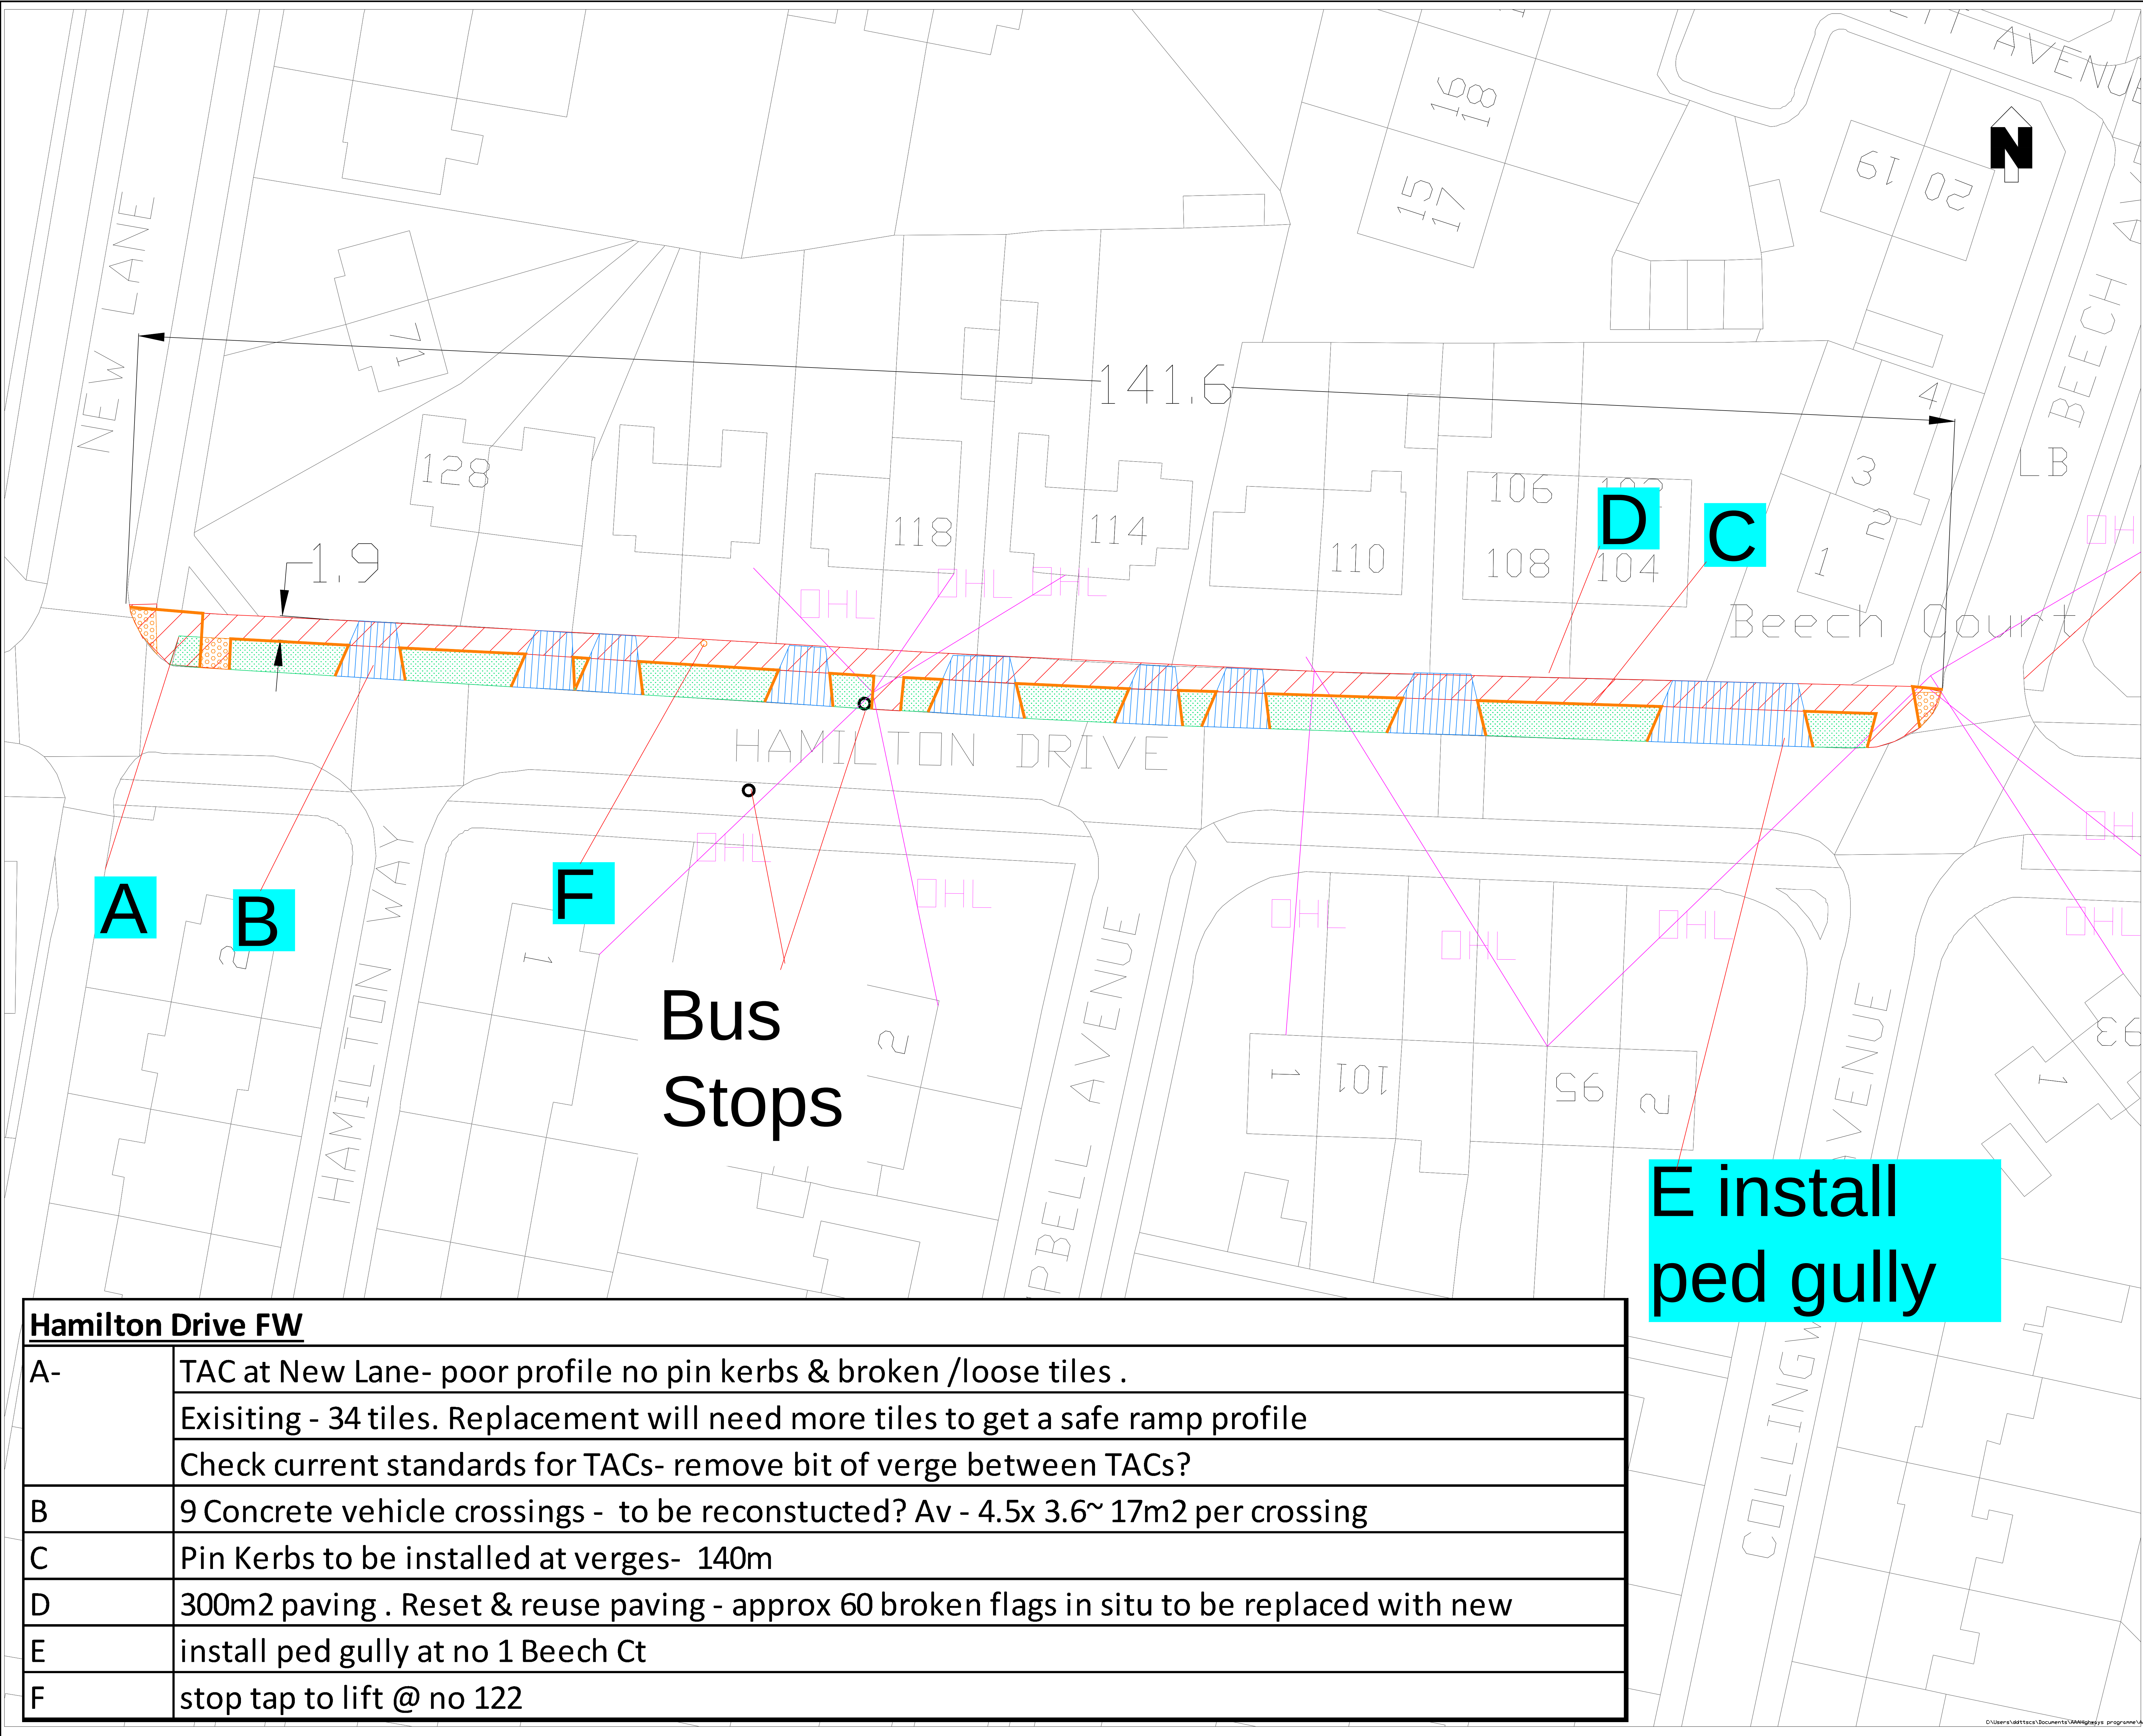

NOTES:

1. All dimensions in metres unless otherwise stated.
2. Do not scale from this drawing.

KEY:

- Footway Paving 2 flags wide
TOTAL = 300m2
- 9no concrete Vxing to recon
- TAC- New Ln end to recon
- Verge- Pin kerbs to intall

Overhead line

HSE

School close to site

Overhanging trees

Watercourse close to site

Overhead lines

Awkward junctions opposite site

BASED UPON THE ORDNANCE SURVEY MAPING WITH THE PERMISSION OF THE CONTROLLER OF HER MAJESTY'S STATIONERY OFFICE. © CROWN COPYRIGHT. UNAUTHORISED REPRODUCTION INFRINGES CROWN COPYRIGHT AND MAY LEAD TO PROSECUTION OR CIVIL PROCEEDINGS. City of York Council OS Licence No. 1000 20818

DRAWING TYPE

Revision	By	Checked	Approved	Date	Description

Highways – Transport Projects and Delivery Team
Eco Depot, Hazel Court, James Street, York, YO10 3DS
www.york.gov.uk

Project
2022-23 FOOTWAYS WORKS
Footway resurfacing
HAMILTON DRIVE

Drawing
Proposed Programmes
Beech Avenue to New Ln
ACOMB

Drawn by	CSS	Date:	03/09/2021
Checked by	XXX	Date:	XXX
Authorised by	XXX	Date:	XXX

Drawing No.	Revision
	A


Drawing Scale:	NTS	A0
CAD Filename:	Plot Scale:NTS	

Hamilton Drive FW

A-	TAC at New Lane- poor profile no pin kerbs & broken /loose tiles .
	Exisiting - 34 tiles. Replacement will need more tiles to get a safe ramp profile
	Check current standards for TACs- remove bit of verge between TACs?
B	9 Concrete vehicle crossings - to be reconstucted? Av - 4.5x 3.6~ 17m2 per crossing
C	Pin Kerbs to be installed at verges- 140m
D	300m2 paving . Reset & reuse paving - approx 60 broken flags in situ to be replaced with new
E	install ped gully at no 1 Beech Ct
F	stop tap to lift @ no 122


LTP Footways

ITEM	11		
LOCATION	Greengales lane		
ROAD NO			
WARD/PARISH	Wheldrake		
SCHEME DRAWING NO			
DESCRIPTION OF WORK	Footway resurfacing- 400m2. 2 pairs of TACs to reconstruct- 12m2.		
<i>SPECIFICATION RECOMMENDATION</i>	T15 resurfacing & kerb replacement to match existing.		
CW WIDTH		FW WIDTH	2.1
CW LENGTH		FW LENGTH	196
CW AREA		FW AREA	400
FEE			
TOTAL ESTIMATE	£112,500		
NOTES	School close to site
Overhead lines
bus route
rural location- busy link road between villages and central York		

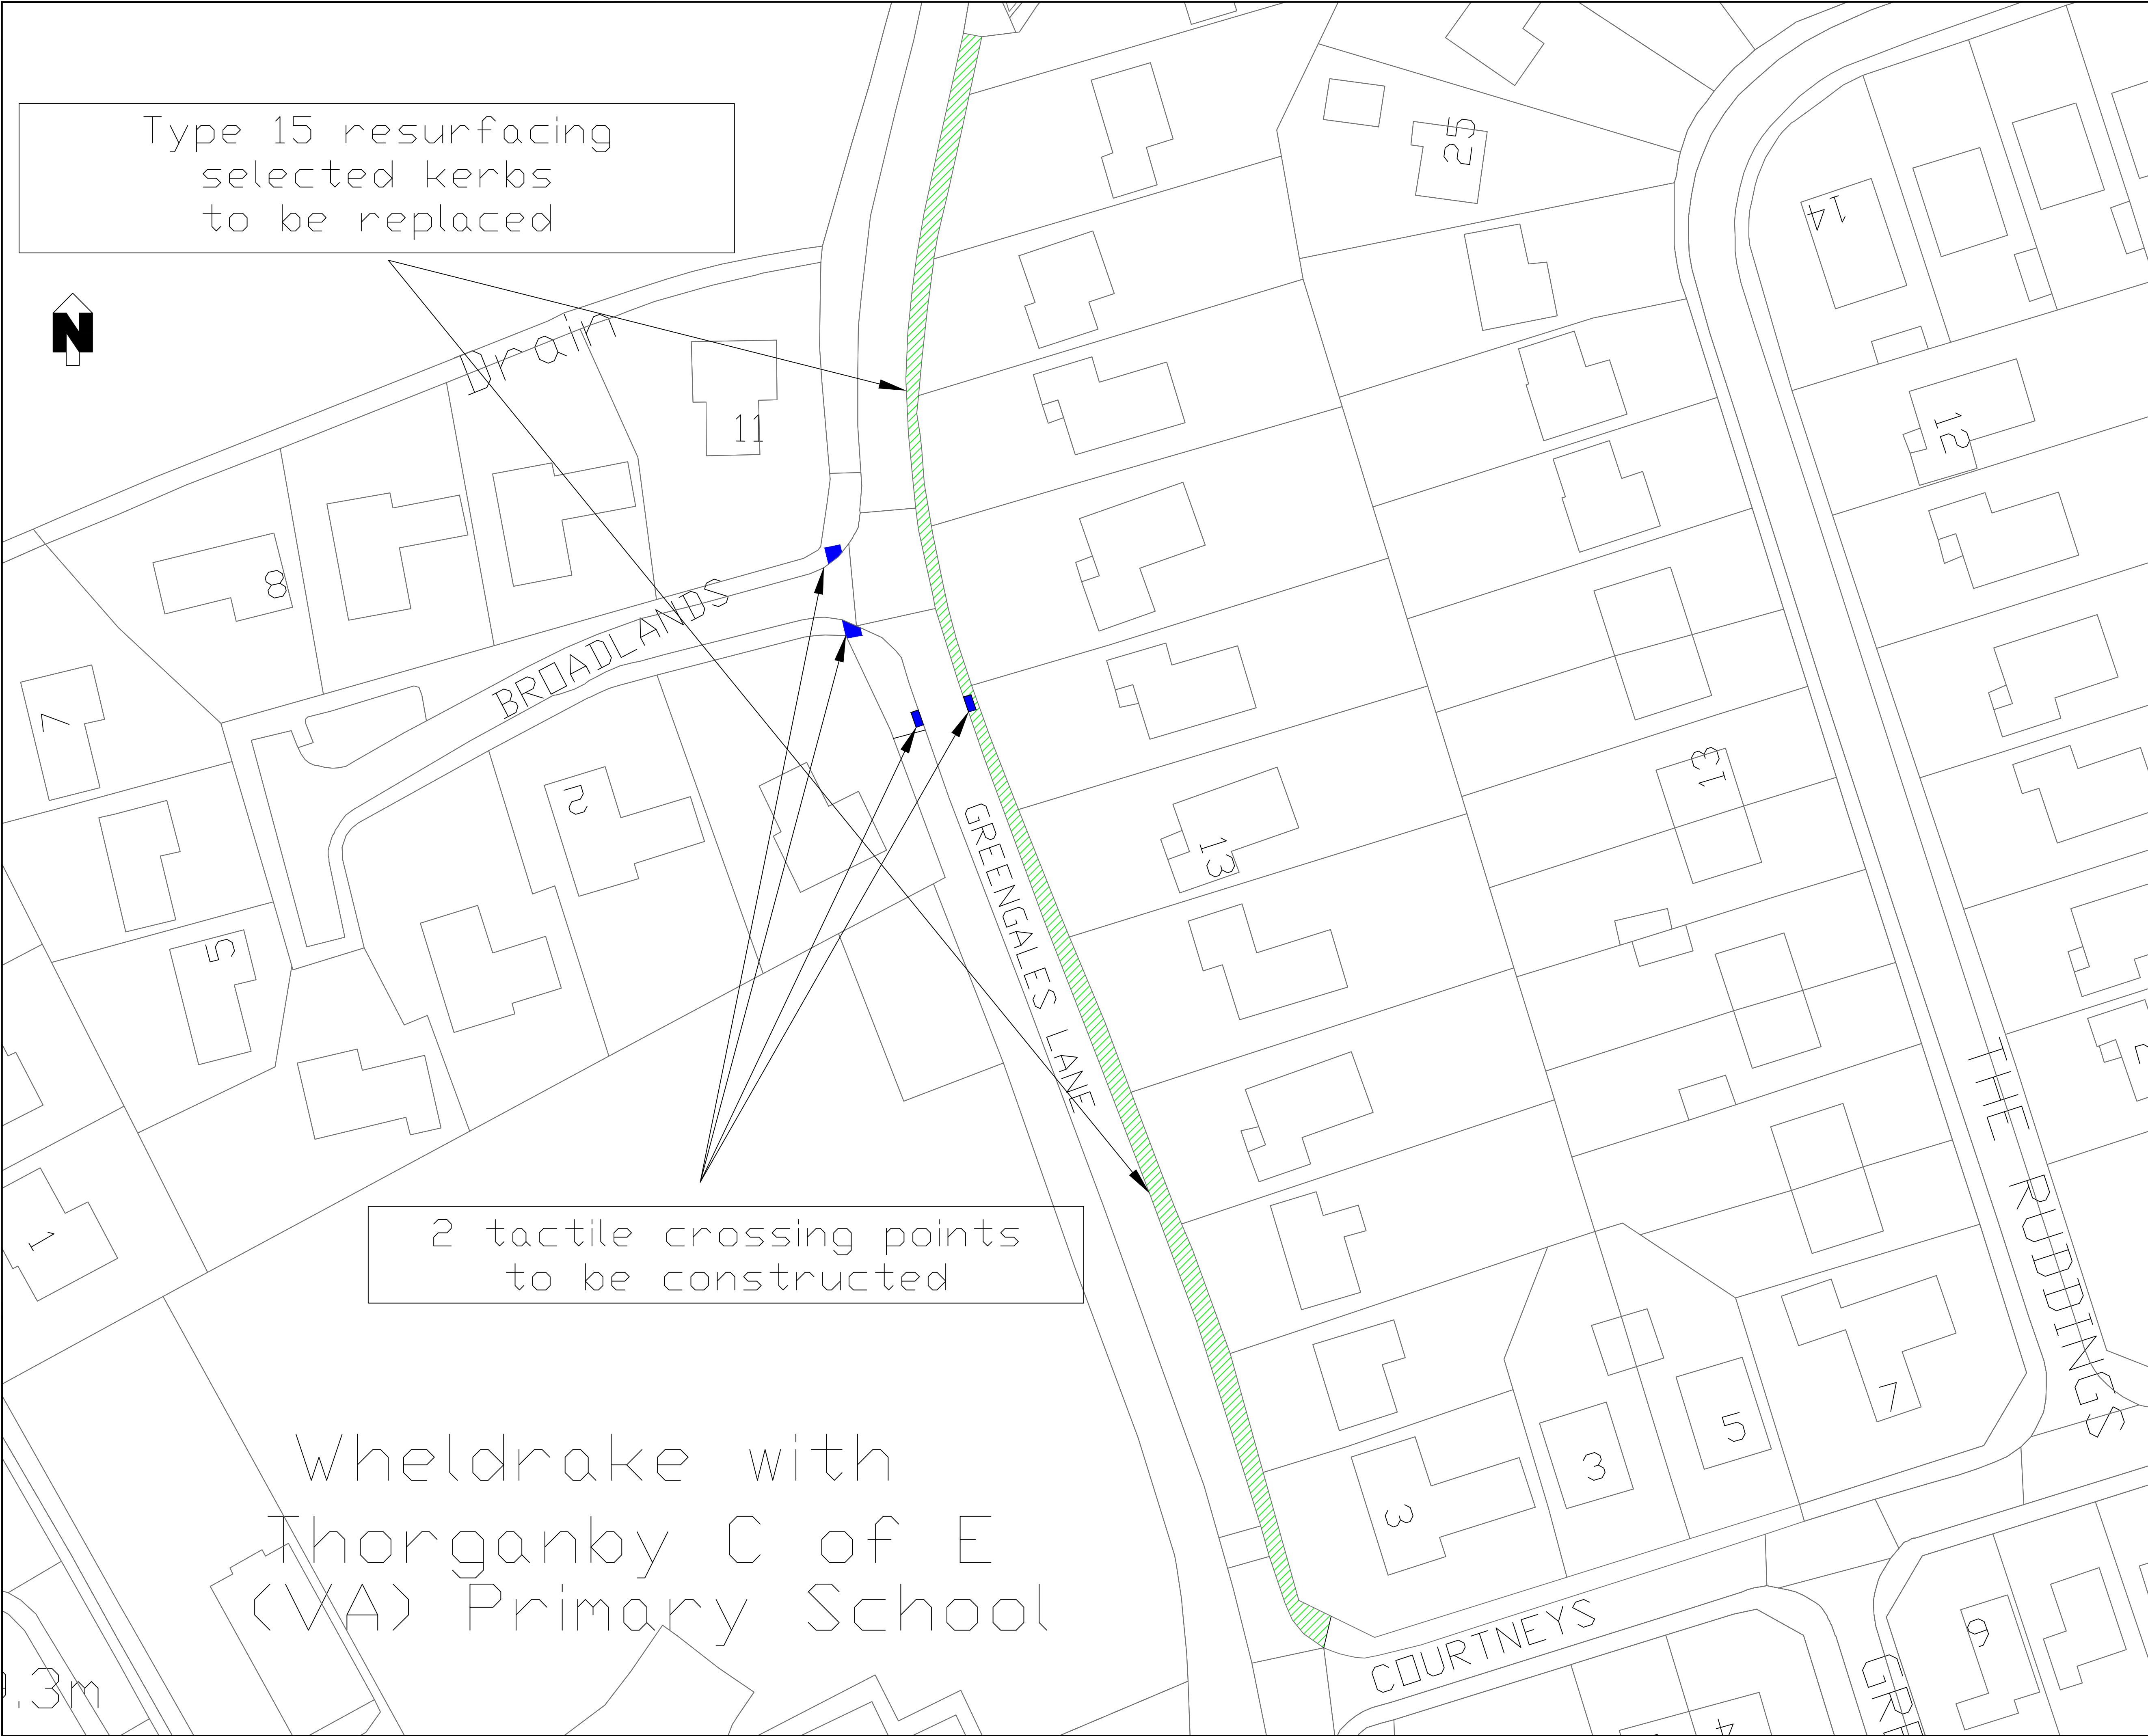

- NOTES:
- 1 Not to Scale
 - 2. Do not scale from this drawing.
 - 3. Any issues should be raised with the scheme engineer immediately.

KEY:



Type 15 resurfacing
400m²



Type 22 Tactile crossing point
12m²

BASED UPON THE ORDNANCE SURVEY MAPING WITH THE PERMISSION OF THE CONTROLLER OF HER MAJESTY'S STATIONERY OFFICES. © CROWN COPYRIGHT. UNAUTHORISED REPRODUCTION INFRINGES CROWN COPYRIGHT AND MAY LEAD TO PROSECUTION OR CIVIL PROCEEDINGS.
City of York Council OS Licence No. 1000_20818

TENDER ISSUE

A	XX	XX	XX	0X/17	Tender Issue
Revision	By	Checked	Approved	Date	Description



Highways — Transport Projects and Delivery Team
Eco Depot, Hazel Court, James Street, York, YO10 3DS
www.york.gov.uk

Project 2020-21 Footway Resurfacing Extents

Drawing Greengales Lane Wheldrake Ward Greengales Lane full footway


Drawn by S. Ensor	Date: 29-10-20
Checked by A N OTHER	Date: XXXXXX
Authorised by A N OTHER	Date: XXXXXX
Drawing No. GL20	Revision A
Drawing Scale: NTS	A1
CAD Filename: Computer Filename	Plot Scale: 1:00

LTP Footways

ITEM	12		
LOCATION	Woolnough Ave		
ROAD NO			
WARD/PARISH	Hull rd		
SCHEME DRAWING NO			
DESCRIPTION OF WORK	Footway resurfacing- 90m2
11m kerbs
26 m pin kerbs
2pairs existing TCs to renew
1arterial gully to reset		
<i>SPECIFICATION RECOMMENDATION</i>	T21 resurfacing & kerb replacement to match existing.		
CW WIDTH		FW WIDTH	2.8
CW LENGTH		FW LENGTH	32
CW AREA		FW AREA	90
FEE			
TOTAL ESTIMATE	£26,500		
NOTES	Overhanging trees and unstable wall in adjacent garden
Damp ground
Vacant site within works area- check if any development
planned
Poss Gas leak queried-31/01/22- Gas ref no 53955771		

Site Location


Woolnough Av

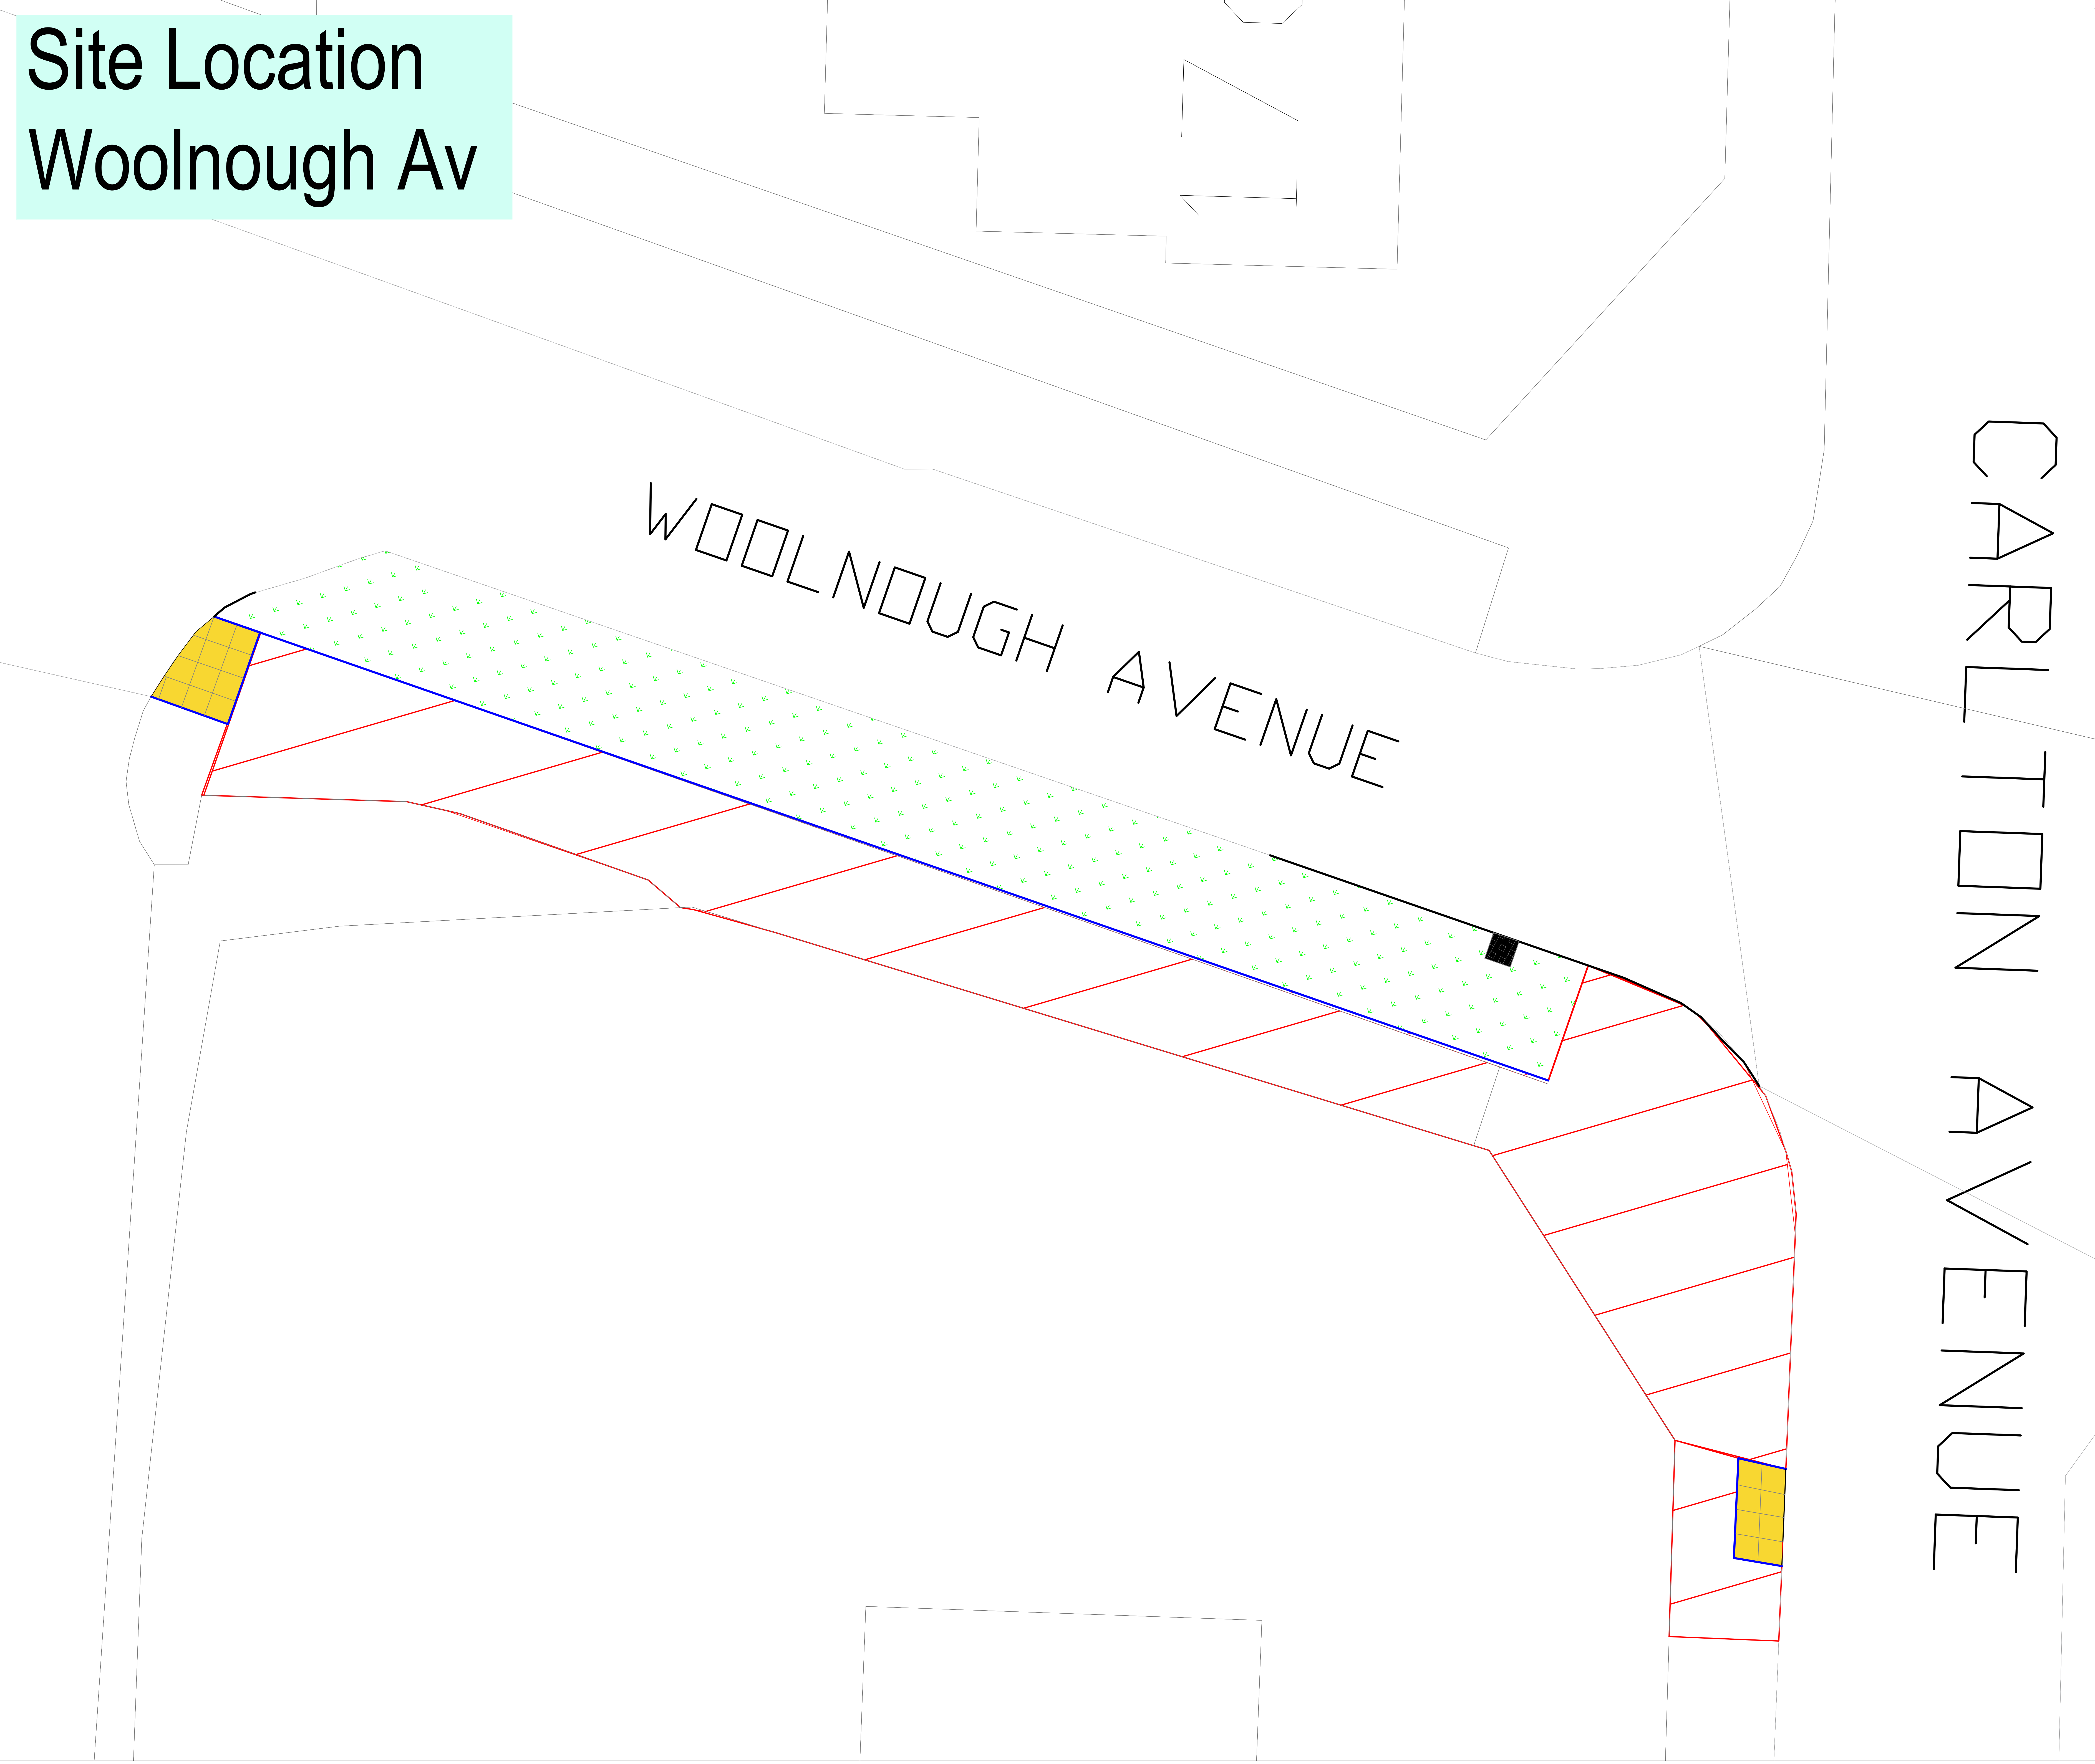

NOTES: 1. All dimensions in metres unless otherwise stated.

2. Do not scale from this drawing.

KEY:

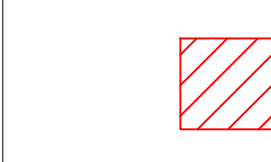
 TYPE 21


Location of footway Works
TOTAL = 90m²

— 11 metres of kerbs

— 26 meters of pin kerbs

 2 existing tactile crossings to renew including 5 pin kerbs surrounding each crossing

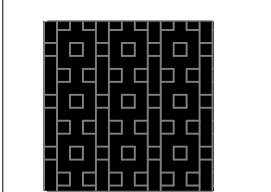 1 arterial gully to reset
5 Box lids to reset

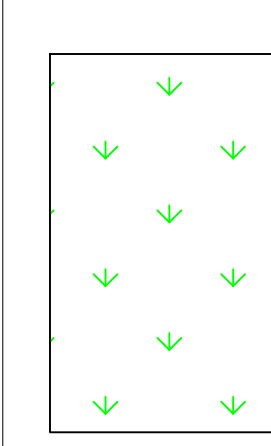 Grass Verge

BASED UPON THE ORDINANCE SURVEY MAPPING WITH THE PERMISSION OF THE CONTROLLER OF HER MAJESTY'S STATIONERY OFFICE. © CROWN COPYRIGHT. UNAUTHORISED REPRODUCTION INFRINGES CROWN COPYRIGHT AND MAY LEAD TO PROSECUTION OR CIVIL PROCEEDINGS.
City of York Council OS Licence No. 1000 20818

DWG_TYPE

Revision	By	Checked	Approved	Date	Description



Project
22/23 FOOTWAY RESURFACING EXTENTS

Drawing
WOOLNOUGH AV, TO CARLTON JNC
HULL ROAD WARD
WOOLNOUGH AV, FOOTWAY

Drawn by	K.K	Date:	2/11/21
Checked by	CHECKED	Date:	DATE2
Authorised by	AUTHORISED	Date:	DATE3


Drawing No.	Revision
DWG_NO	A

Drawing Scale:	NTS	A1
----------------	-----	----

CAD Filename:	COMPUTER\FILENAME	Plot Scale:	1:00
---------------	-------------------	-------------	------

LTP Footways


ITEM	13		
LOCATION	North Lane		
ROAD NO			
WARD/PARISH	Wheldrake		
SCHEME DRAWING NO			
DESCRIPTION OF WORK	255m 2 resurfacing		
SPECIFICATION RECOMMENDATION	T15 resurfacing to match existing. Most of kerbs OK to remain. 5m kerbs to replace
2 TAC at school to replace(1pair) 38 tiles to replace, 24 to reuse
10 pin kerbs at school ent		
CW WIDTH		FW WIDTH	2.2
CW LENGTH		FW LENGTH	118
CW AREA		FW AREA	255
FEE			
TOTAL ESTIMATE	£56,500		
NOTES	Rural/ residential road.
Farm traffic
School within site area
Overhead coms lines
Drainage needs checking prior to works		

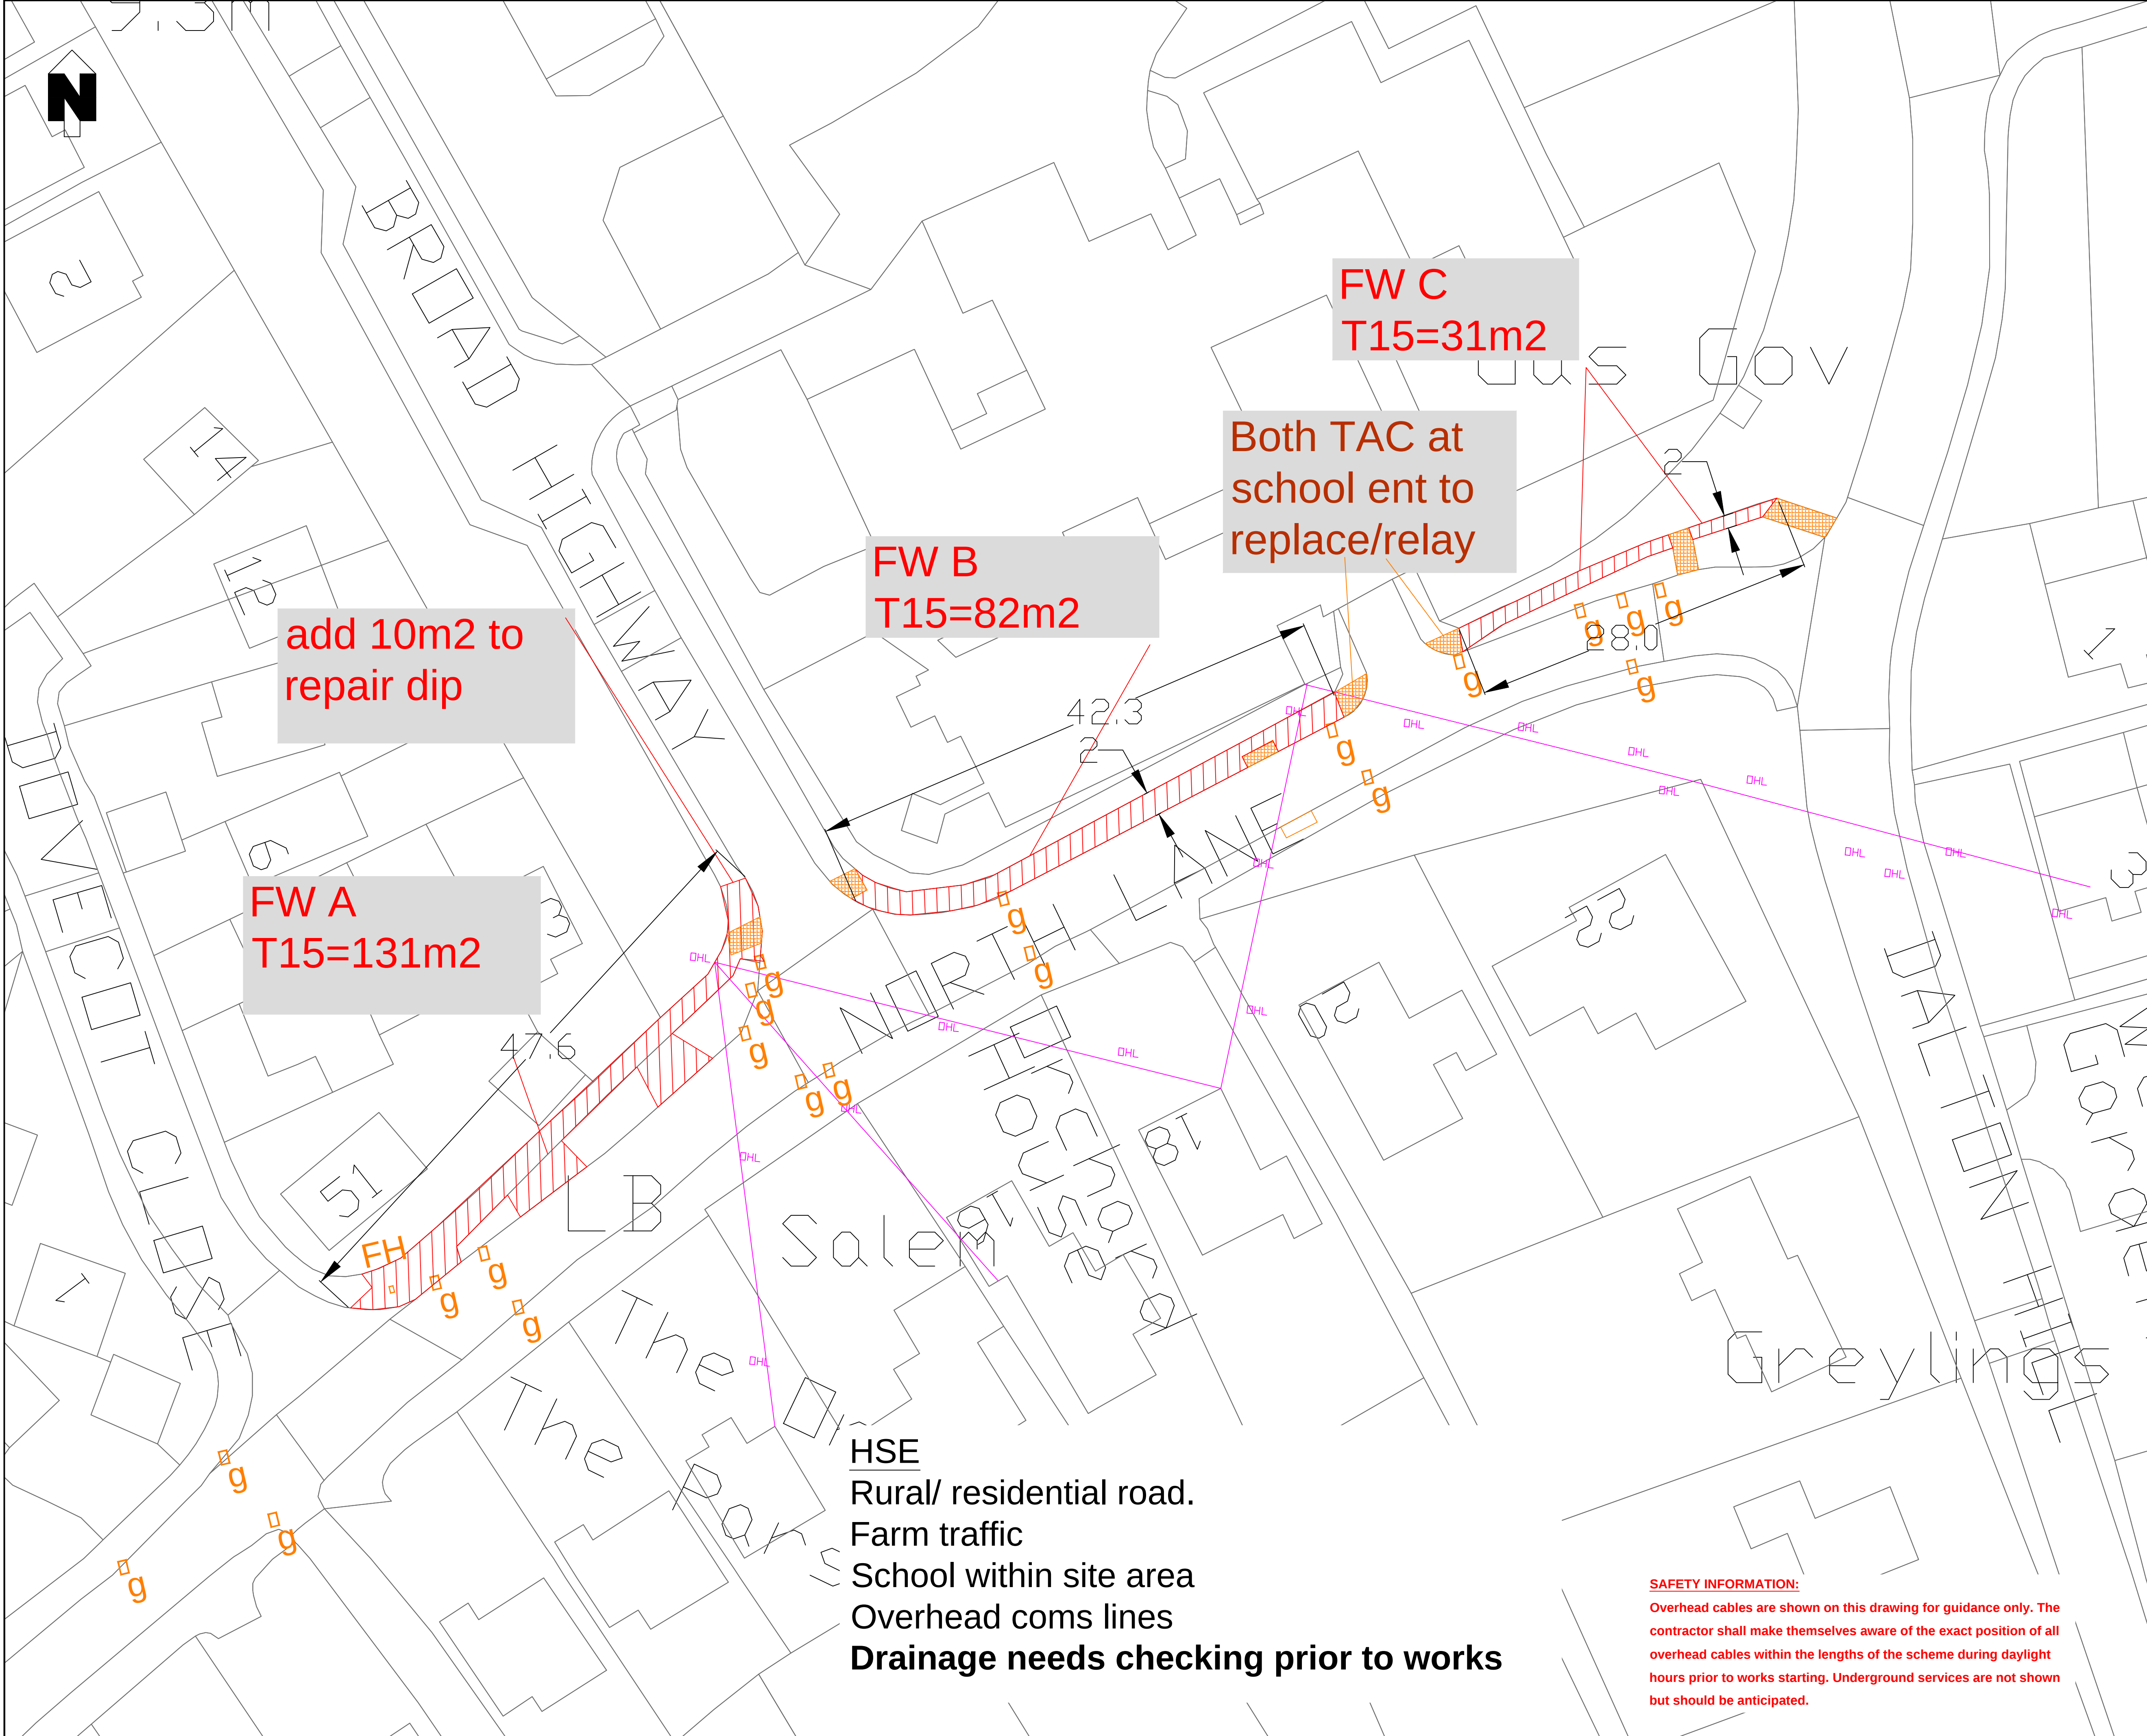

NOTES:

1. All dimensions in metres unless otherwise stated.

2. Do not scale from this drawing.


- KEY:
-  255m2 T15-most of kerbs OK.
 -  38 tiles to replace, 24 to reuse/relay 2xTAC at school & 5m kerbs
 - 10m pin kerbs at school ent

 Overhead lines

BASED UPON THE ORDNANCE SURVEY MAPING WITH THE PERMISSION OF THE CONTROLLER OF HER MAJESTY'S STATIONERY OFFICE. © CROWN COPYRIGHT. UNAUTHORISED REPRODUCTION INFRINGES CROWN COPYRIGHT AND MAY LEAD TO PROSECUTION OR CIVIL PROCEEDINGS. City of York Council OS Licence No. 1000 20818

TENDER ISSUE

A	XX	XX	XX	0X/17	Tender Issue
Revision	By	Checked	Approved	Date	Description



CITY OF
YORK
COUNCIL

Highways – Transport Projects and Delivery Team
Eco Depot, Hazel Court, James Street, York, YO10 3DS
www.york.gov.uk

Project 2022-23 Programme
Footway Resurfacing
WORKS

Drawing
North lane
Wheldrake

Drawn by CSS	Date: JAN 21
Checked by xxx	Date: XXXXXX
Authorised by xxx	Date: XXXXXX


Drawing No.	Revision
HMS22/.....	A

Drawing Scale: nts	A1
CAD Filename: Computer Filename	Plot Scale: nts

SAFETY INFORMATION:
Overhead cables are shown on this drawing for guidance only. The contractor shall make themselves aware of the exact position of all overhead cables within the lengths of the scheme during daylight hours prior to works starting. Underground services are not shown but should be anticipated.

LTP Footways

ITEM	14		
LOCATION	Lawrence Street – Outside Rook & Gaskill		
ROAD NO			
WARD/PARISH	Fishergate		
SCHEME DRAWING NO			
DESCRIPTION OF WORK	Resurfacing and reconstruction. Removal of 8m kerbs, 50m2 concrete. Install 15 m drop kerbs at gateway to building		
SPECIFICATION RECOMMENDATION	50m2 T21 reconstruction – remove existing redundant vehicle ent.
80m2 T15 resurfacing to tie into existing		
CW WIDTH		FW WIDTH	3.2
CW LENGTH		FW LENGTH	42
CW AREA		FW AREA	130
FEE			
TOTAL ESTIMATE	£31,000		
NOTES	Very busy road junction
3 metal cross path channels to replace
Residential , commercial premises, student accom
Pub within site
Conservation Area, Archaeology possible		

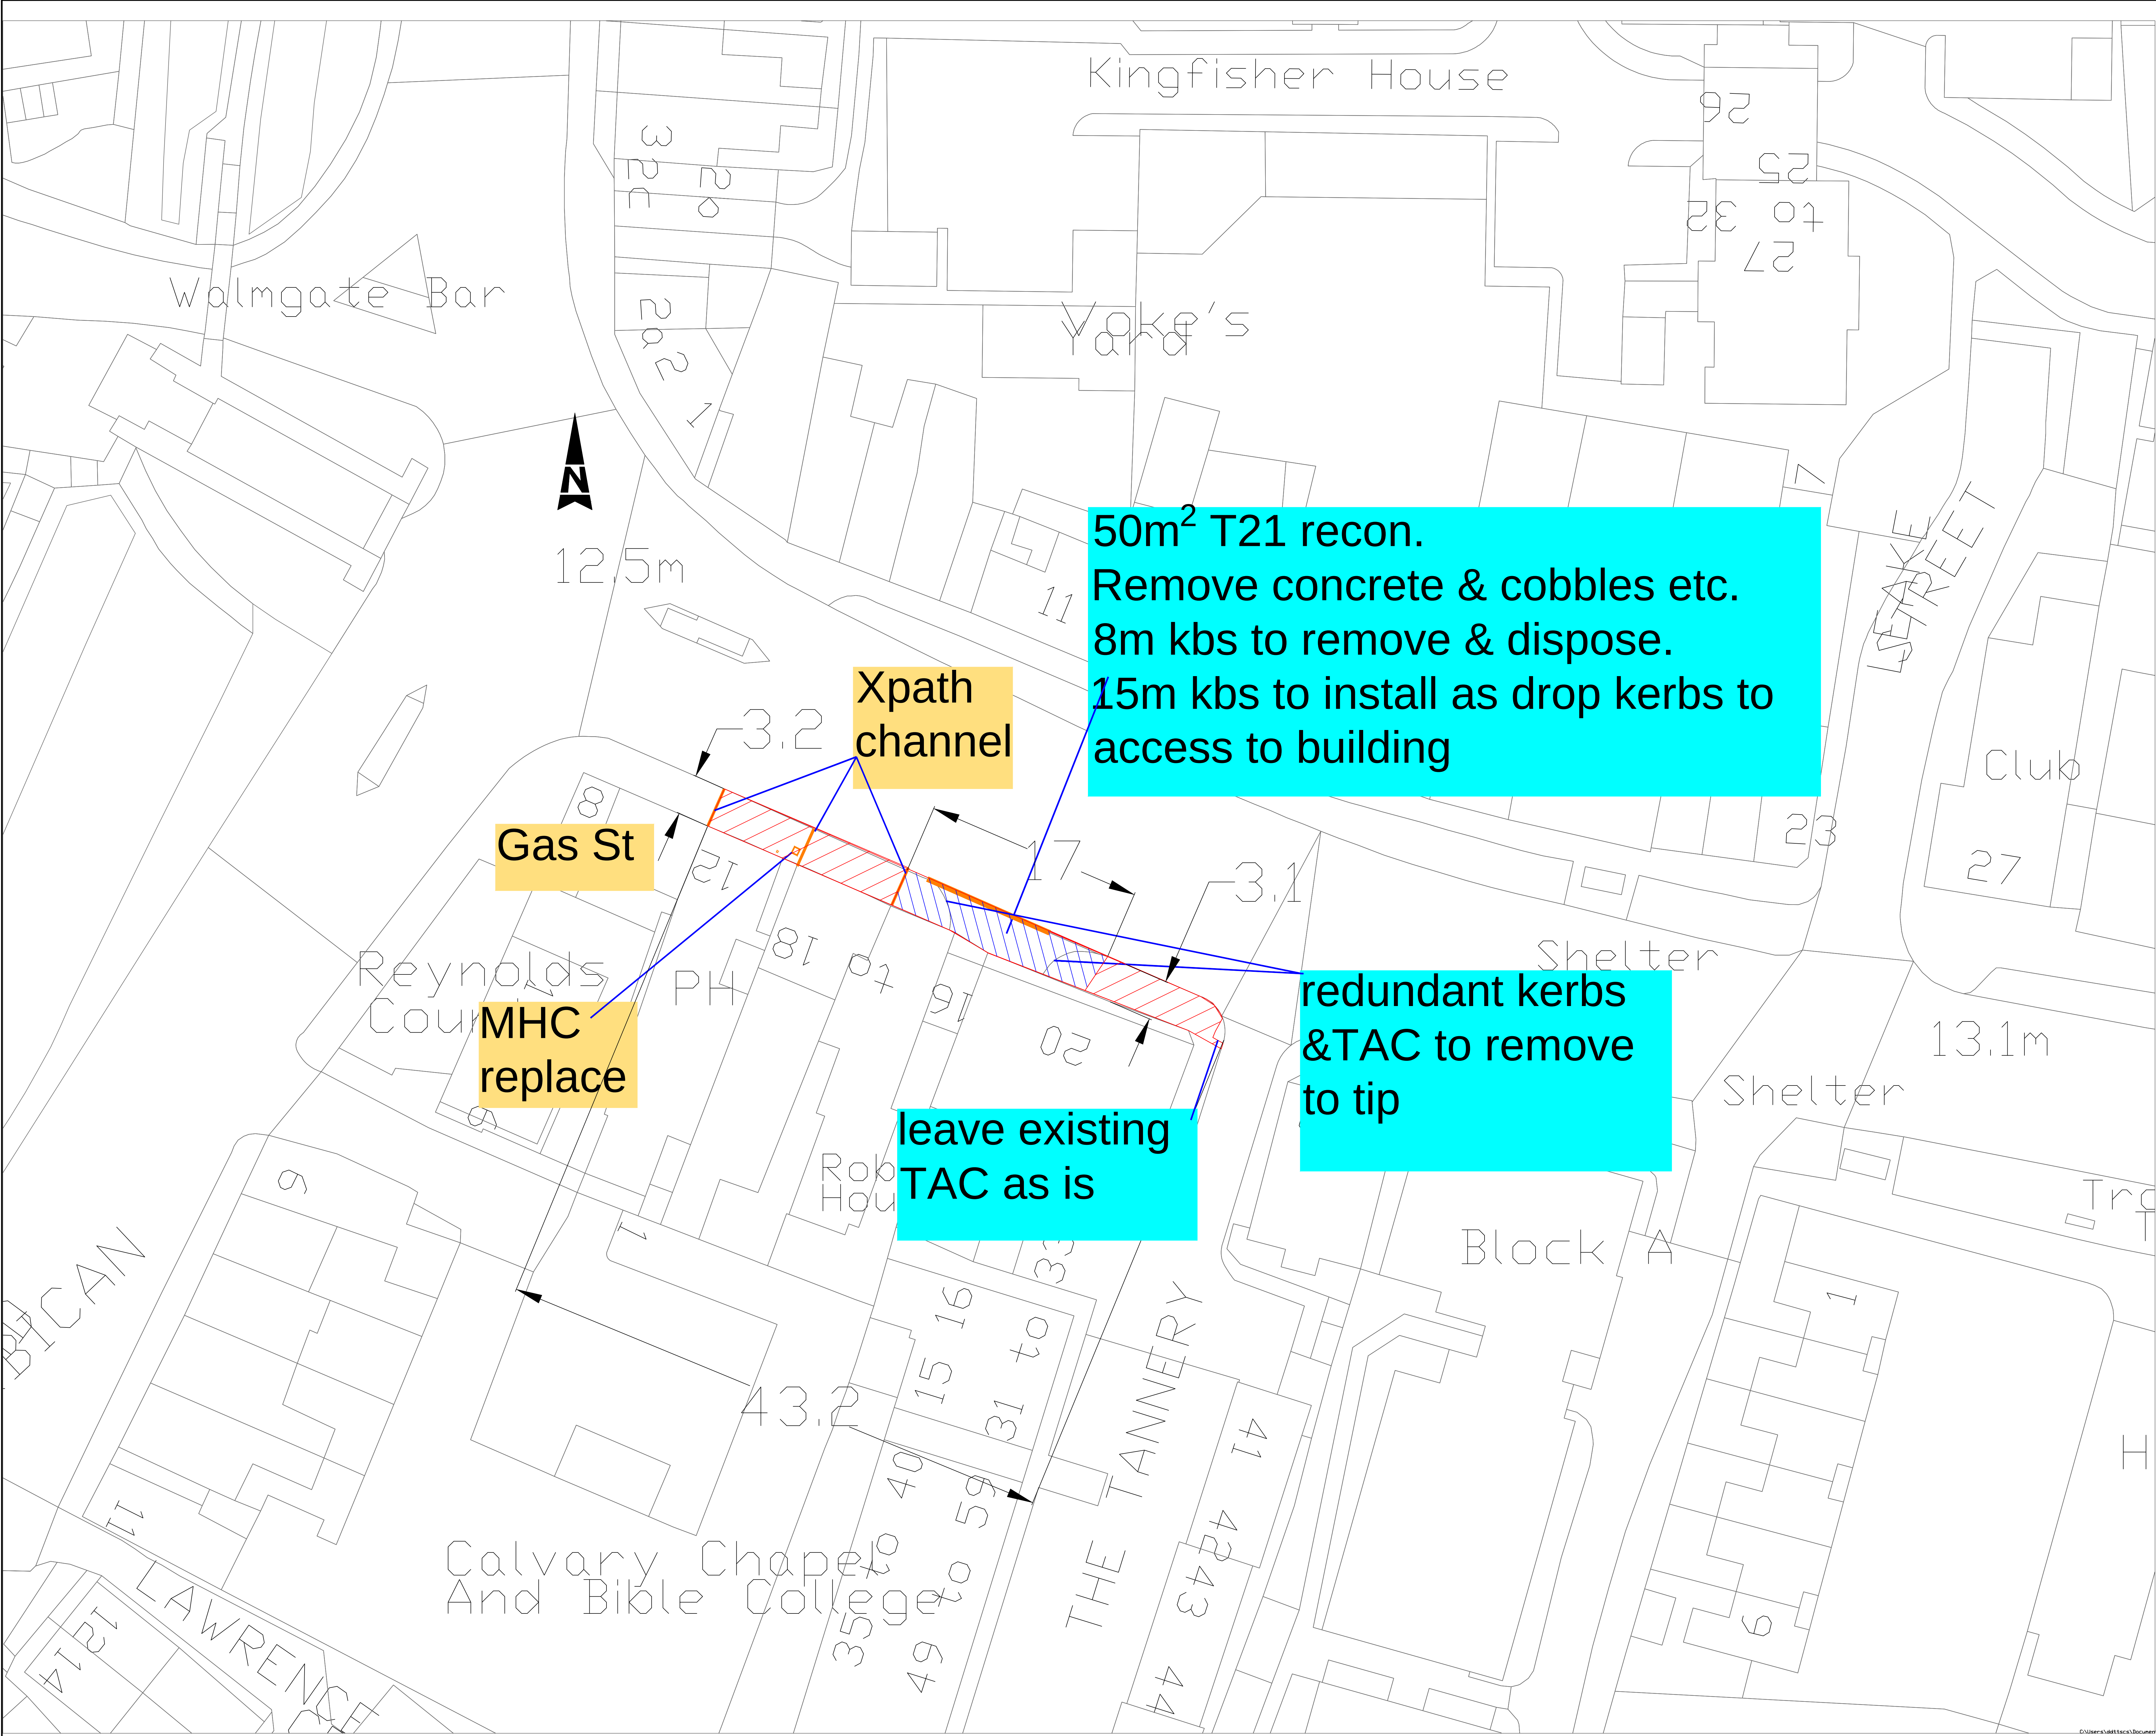

NOTES:

1. All dimensions in metres unless otherwise stated.
2. Do not scale from this drawing.

KEY:

- Surfacing T15 - 80 m2
- Surfacing T21 - 55m2
- X path gutter gullys
- Drop/ FF kerb replacements- 20m

BASED UPON THE ORDNANCE SURVEY MAPPING WITH THE PERMISSION OF THE CONTROLLER OF HER MAJESTY'S STATIONERY OFFICE. © CROWN COPYRIGHT. UNAUTHORISED REPRODUCTION INFRINGES CROWN COPYRIGHT AND MAY LEAD TO PROSECUTION OR CIVIL PROCEEDINGS. City of York Council OS Licence No. 1000 20818

DRAWING TYPE

Revision	By	Checked	Approved	Date	Description

CITY OF YORK COUNCIL

Highways – Transport Projects and Delivery Team
Eco Depot, Hazel Court, James Street, York, YO10 3DS
www.york.gov.uk

Project
2022-23 Highways Programme
FOOTWAYS
LOCATION

Drawing
Proposed Programmes
Lawrence St Nxt Rook & Gaskill
Fishergate/ Guildhall

Drawn by	CSS	Date:	18/11/2021
Checked by		Date:	
Authorised by		Date:	

Drawing No.	Revision
	A

Drawing Scale:	NTS	A0
CAD Filename:		Plot Scale: NTS